



Installation of Apache OpenMeetings 3.1.1 on Mac El Capitan OS X

It is tested with positive result. We will use the Apache's binary version OpenMeetings 3.1.1 stable, that is to say will suppress his compilation. It is done step by step.

25-3-2016

Starting....

1)


----- Installation of Command line developer tools -----

Should install in first place the developer tools, that will help us to compile the sources.


Run the shell as administrator, not as root, and install:

`xcode-select --install`


...will open a window informing:

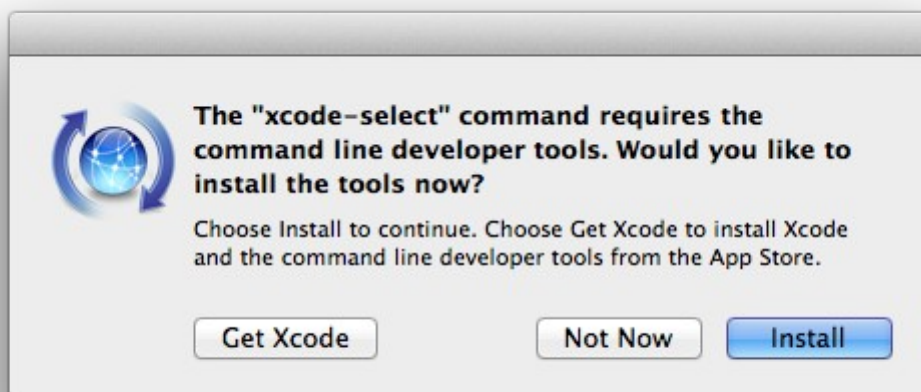


click **Install** button only, and will open other window. click **Agree** button

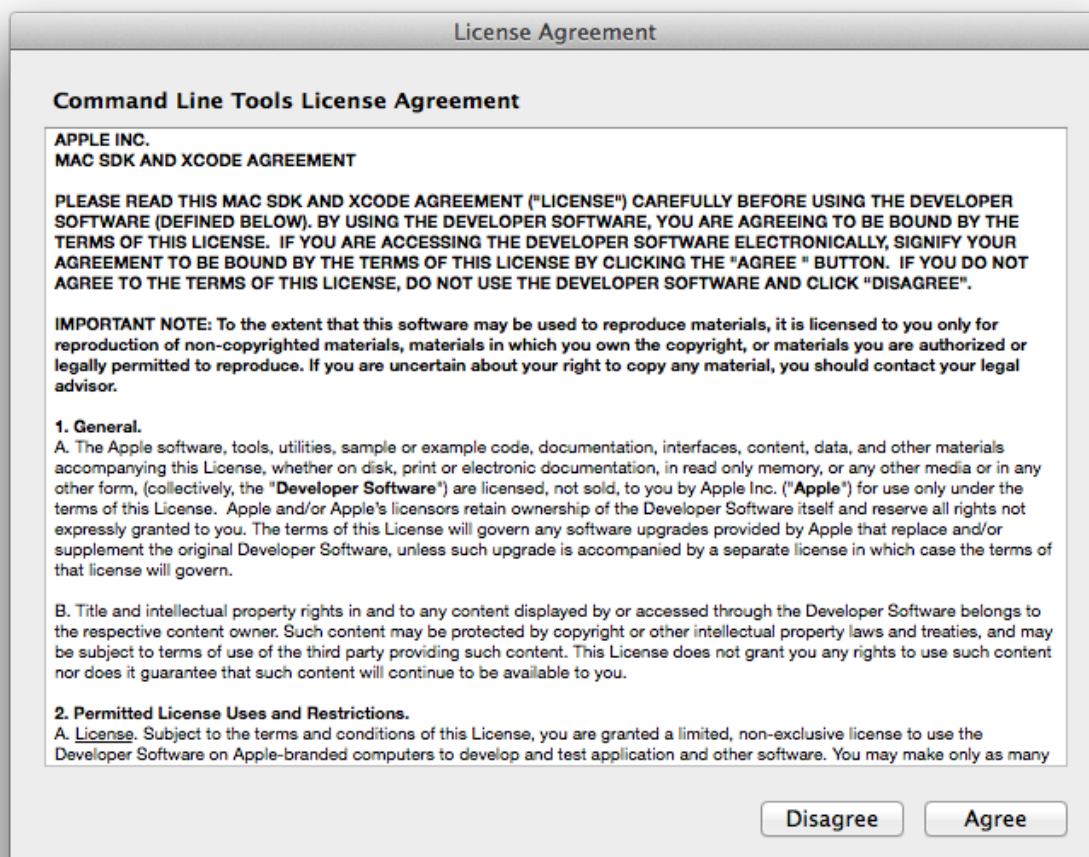

...and will download and install the software

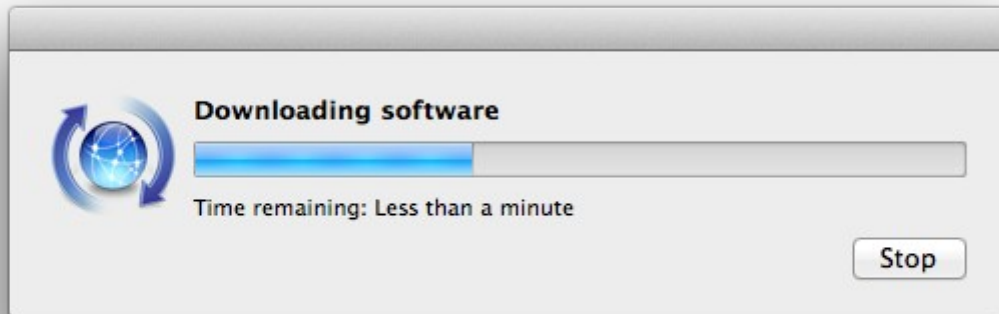

...telling when it finished

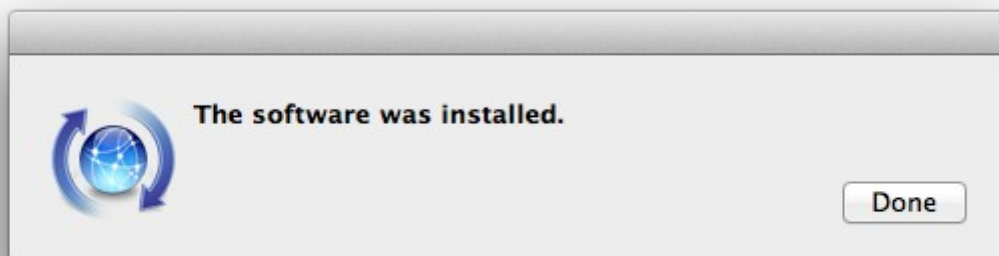

...clic **Done**.

2)

----- **Installation of Homebrew** -----

Homebrew install software. It is on Mac the same that apt-get on Debian and yum on Centos or Fedora, for example. Should install it:

```
ruby -e "$(curl -fsSL https://raw.githubusercontent.com/Homebrew/install/master/install)"
```

brew doctor

...and update:

brew update

3)

----- **Installation of need it software** -----

Will install wget to download files, and ghostscript:

brew install wget ghostscript nmap

4)

----- **Installation of Oracle Java** -----

Java is need it to work with Apache OpenMeetings. Will install Oracle Java 1.8:

Please visit:

<http://www.oracle.com/technetwork/java/javase/downloads/jdk8-downloads-2133151.html?ssSourceSiteId=otnes>

...clie on:

Agree and proceed

...check:

Accept License Agreement

...and download the file called:

jdk-8u77-macosx-x64.dmg

Once unloaded the file, double clic on it and follow the installation process by default.

5)

----- Installation of OpenOffice -----

OpenOffice is need it to convert the office files uploaded to pdf.

To download please visit:

<http://www.openoffice.org/download/>

...select and download:

OS X (version >= 10-7) (DMG) language 4.1.2

Download full installation

Do double clic on the unloaded file: **Apache_OpenOffice_4.1.2_MacOS_x86-64_install....**
and will open this window:



...please, drag **OpenOffice** icon to right, to **Applications** folder icon.

6)

----- **Installation of ImageMagick, Sox, Swftools and Vlc** -----

ImageMagick work with the image files as png, jpg, gif, etc.

Sox work about sound.

[brew install imagemagick sox](#)

ImageMagick and Sox will be installed in: /usr/local/bin

Swftools convert images and pdf files to flash files (swf). These flash files will be showing in the whiteboard, for example. Download from here:

<https://flexpaper-desktop-publisher.googlecode.com/files/swftools-0.9.2-1-osx10.6.dmg>

...clie on [swftools-0.9.2-1-osx10.6.dmg](#) file unloaded and install by default.

Swftools will be installed in: /opt/local/bin

Vlc is the player for the video files we'll recording.

[brew install Caskroom/cask/vlc](#)

7)

----- **FFMPEG compilation** -----

Ffmpeg work about video. We'll compile it. For it base on a script, an excellent work of Hunter at this url:

<http://hunterford.me/compiling-ffmpeg-on-mac-os-x/>

...as it is doesn't works with OpenMeetings. Then i have modiflicated the script and now it works rightly. Also is updated to 3-4-2016. Should install some paquets before to run it:

[brew install mercurial cmake](#)

The script will download, compile and install ffmpeg automatically.

Please, download it from here, the instructions to run it are inside the zip:

https://cwiki.apache.org/confluence/download/attachments/27838216/ffmpeg_compile_El_Capitan_OSX.zip?version=3&modificationDate=1459700531125&api=v2

...run it and after the compilation is finished you can go to **step 8)**

But if you prefer copy and paste, i **do not advise**, leave the text script.
Please respect the spaces between the text blocks when copy. Will ask for password during installation, attention!

```
nano /Users/you-user/ffmpeg-mac.sh
```

...modify .../**you-user**/... by your real user name.

Copy **from here**:

```
# Create a temporary directory for sources.
```

```
SOURCES=$(mktemp -d /tmp/hola)
```

```
cd $SOURCES
```

```
# Download the necessary sources.
```

```
curl -#LO http://sourceforge.net/projects/opencore-amr/files/fdk-aac/fdk-aac-0.1.4.tar.gz
```

```
curl -#LO http://downloads.sourceforge.net/project/lame/lame/3.99/lame-3.99.5.tar.gz
```

```
curl -#LO http://downloads.xiph.org/releases/ogg/libogg-1.3.2.tar.gz
```

```
curl -#LO http://pkg-config.freedesktop.org/releases/pkg-config-0.29.tar.gz
```

```
curl -#LO http://downloads.xiph.org/releases/vorbis/libvorbis-1.3.5.tar.gz
```

```
curl -#LO http://downloads.xiph.org/releases/theora/libtheora-1.1.1.tar.bz2
```

```
# curl -#LO http://downloads.sourceforge.net/project/opencore-amr/vo-amrwbenc/vo-amrwbenc-0.1.1.tar.gz
```

```
curl -#LO http://www.tortall.net/projects/yasm/releases/yasm-1.3.0.tar.gz
```

```
curl -#LO http://storage.googleapis.com/downloads.webmproject.org/releases/webm/libvpx-1.5.0.tar.bz2
```

```
curl -#LO ftp://ftp.videolan.org/pub/x264/snapshots/last\_stable\_x264.tar.bz2
```

```
hg clone https://bitbucket.org/multicoreware/x265
```

```
curl -#LO http://downloads.xvid.org/downloads/xvidcore-1.3.4.tar.gz
```

```
# curl -#LG -d "p=ffmpeg.git;a=snapshot;h=HEAD;sf=tgz" -o ffmpeg.tar.gz http://git.videolan.org/
```

```
curl -#LO http://ffmpeg.org/releases/ffmpeg-3.0.1.tar.bz2
```

```
# Unpack files
```

```
for file in `ls ${SOURCES}/*.tar.*`; do
```

```
    tar -xzf $file
```

```
    rm $file
```

```
done
```

```
cd fdk-aac-*/
```

```
CFLAGS="-D__unix__" ./configure && make -j 4 && sudo make install; cd ..
```

```
cd lame-*/
```

```
./configure && make -j 4 && sudo make install; cd ..
```

```
cd libogg-*/
```

```
./configure && make -j 4 && sudo make install; cd ..
```

```
cd pkg-config-*/
```

```
./configure && make -j 4 && sudo make install; cd ..
```

```

cd libvorbis-*/
./configure --disable-oggtest --build=x86_64 && make -j 4 && sudo make install; cd ..

cd libtheora-*/
./configure --disable-oggtest --disable-vorbistest --disable-examples --disable-asm
make -j 4 && sudo make install; cd ..

# cd vo-amrwbenc-*/

# ./configure && make -j 4 && sudo make install; cd ..

cd yasm-*/
./configure && make -j 4 && sudo make install; cd ..

cd libvpx-*/
./configure --enable-vp8 --enable-pic && make -j 4 && sudo make install; cd ..

cd x264-*
CFLAGS="-I. -fno-common -read_only_relocs suppress" ./configure --enable-pic --enable-shared
&& make -j 4 && sudo make install; cd ..

cd x265/build/linux
cmake -G "Unix Makefiles" -DENABLE_SHARED:bool=off ../../source && make && make
install; cd /tmp/hola

cd xvidcore/build/generic
./configure --disable-assembly && make -j 4 && sudo make install; cd ../../..

# For Lion, we have to change which compiler to use (--cc=clang).
# If you're building on Snow Leopard, you can omit this flag so it defaults to gcc.
cd ffmpeg-*/
CFLAGS="-DHAVE_LRINTF" ./configure --pkg-config-flags="--static" --enable-nonfree
--enable-gpl --enable-version3 --enable-postproc --enable-swscale --enable-avfilter --enable-
libmp3lame --enable-libvorbis --enable-libtheora --enable-libfreetype --enable-libfdk-aac --enable-
libxvid --enable-libx264 --enable-libx265 --enable-libvpx --enable-hardcoded-tables --enable-
shared --enable-threads --disable-indecs --cc=clang && make -j 4 && sudo make install

# --enable-libvo-amrwbenc

# FFMpeg creates MP4s that have the metadata at the end of the file.
# This tool moves it to the beginning.
cd tools
gcc -D_LARGEFILE_SOURCE qt-faststart.c -o qt-faststart
sudo mv qt-faststart /usr/local/bin

....to here.

```

Once copied and pasted, clic **Ctrl+X** and will ask to save, clic **Y** and after this clic **Return** (Enter) to exit. Concede execution permission:

```
chmod +x /Users/you-user/ffmpeg-mac.sh
```


...remember modify .../**you-user**/....by your real user name

...and execute the script to download, compile and intall ffmpeg:

```
cd /Users/you-user
```

```
./ffmpeg-mac.sh
```

...be patience and wait untill is finished. Some times will look it is stoped...don't touch anything and wait. Once finished, the installed files are in **/usr/local/bin**

8)

----- Installation of Adobe Flash Player -----

Flash Player even is need it for rooms. Download and install it:

http://fpdownload.macromedia.com/pub/flashplayer/latest/help/install_flash_player_osx.dmg

...clie on the [install_flash_player_osx.dmg](#) file and install it by default.

9)

----- Installation of Jodconverter -----

Jodconverter work to convert uploaded files. (Remember modify **you-user** by your real user name).

```
cd /Users/you-user
```

```
wget http://jodconverter.googlecode.com/files/jodconverter-core-3.0-beta-4-dist.zip
```

```
unzip jodconverter-core-3.0-beta-4-dist.zip
```

10)

----- Installation of MySQL -----

We'll use MySQL as data server. Install it:

```
brew install mysql
```

if you get this error: **Error: The `brew link` step did not complete successfully**, do this:

```
sudo chown -R $(whoami) /usr/local
```

```
brew link mysql
```

...if is not that error then don't do it.

Once finished, run MySQL:

```
mysql.server start
```

...and give a password to root of MySQL:

```
mysql -u root mysql
```

This command to give a root password to MySQL, is for 5.7.6 version and later.

...modify **your_new_password** by the password you like it:

```
mysql> ALTER USER 'root'@'localhost' IDENTIFIED BY 'your_new_password';
```

```
mysql> flush privileges;
```

...and out:

```
mysql> quit
```

11)

----- Make a data-base for OpenMeetings -----

Should make a data.base for OpenMeetings.

Run MySQL if not:

```
mysql.server start
```

...accede:

```
mysql -u root -p
```

...will ask for the password just we made it, and now we'll make our data-base:

```
mysql> CREATE DATABASE open311 DEFAULT CHARACTER SET 'utf8';
```

...also we make an user with a password for this data-base:

(One line only with a space between both)

```
mysql> GRANT ALL PRIVILEGES ON open311.* TO 'hola'@'localhost'  
IDENTIFIED BY '123456' WITH GRANT OPTION;
```

```
mysql> quit
```

`open311` is the data-base name
`hola` is the name of the user for this data-base
`123456` is the password of `hola` user.

If you like it can modify these data, but remember it! Will need it later.

12)

----- Installation of OpenMeetings -----

Well, we are at the installation of OpenMeetings. We'll do it in: (Remember modify `you-user`)

```
/Users/you-user/red5311
```

...then make the folder:

```
mkdir /Users/you-user/red5311
```

...remember always modify `.../you-user/...` by your real user name.

Download Apache-OpenMeetings file to the installation folder:

```
cd /Users/you-user/red5311
```

```
wget http://apache.rediris.es/openmeetings/3.1.1/bin/apache-openmeetings-3.1.1.zip
```

```
unzip apache-openmeetings-3.1.1.zip
```

...save the unloaded file moving it to your home:

```
mv apache-openmeetings-3.1.1.zip /Users/you-user
```

Download and install the connector file between OpenMeetings and MySQL:

```
cd /Users/you-user
```

```
wget http://repo1.maven.org/maven2/mysql/mysql-connector-java/5.1.38/mysql-connector-java-5.1.38.jar
```

...and copy it to his place:

(Only one line with a space between both)

```
cp /Users/you-user/mysql-connector-java-5.1.38.jar
/Users/you-user/red5311/webapps/openmeetings/WEB-INF/lib
```

13)

----- **Configuration of the data-base on OpenMeetings** -----

We'll configure the file that do connect OpenMeetings with MySQL.

(Only one line without space between both)

```
nano /Users/you-user/red5311/webapps/openmeetings/WEB-INF/classes/META-
INF/mysql_persistence.xml
```

Modify line 72:

```
, Url=jdbc:mysql://localhost:3306/openmeetings
```

...to

```
, Url=jdbc:mysql://localhost:3306/open311
```

...is the name of our data-base we made it.

Modify line 77:

```
, Username=root
```

...to

```
, Username=hola
```

...is the user name we made for our data-base.

Modify line 78:

```
, Password="" />
```

...to

```
, Password=123456" />
```

...is the password we made for the user called "hola".

If you have choose any other name for the user, password or data-base, here is where to type it.

clie **Ctrl+X**, will ask to save, clic **Y** and to exit clic **Retutn** (Enter.)

Now, protect the file:

(Only one line without space between both)

```
chmod 640 /Users/you-user/red5311/webapps/openmeetings/WEB-INF/classes/META-INF/mysql_persistence.xml
```

...remember modify **.../you-user/...**by your real user name.

14)

----- **Script to run red5-OpenMeetings** -----

I supress to leave here the text script because copy and paste will give errors. So please download the script to run-stop red5-OpenMeetings.

```
cd /Users/you-user
```

(Only one line without space between both)

```
wget https://cwiki.apache.org/confluence/download/attachments/27838216/red5-mac?version=3&modificationDate=1458903758519&api=v2
```

...once is unloaded press **Ctrl+c**

Rename the script:

```
mv red5-mac?version=3 red5-mac
```

It is necessary to modify something inside the script. We edit it and type your real user name:

```
nano /Users/you-user/red5-mac
```

...the line:

```
export RED5_HOME=/Users/you-user/red5311
```

...press **Ctrl+x** will ask to save, press **Y** and **Return** (Enter)

```
sudo su
```

```
cp /Users/you-user/red5-mac /opt
```

...concede execution permission:

```
chmod +x /opt/red5-mac
```

exit

15)

----- Run red5-OpenMeetings -----

Begin with the interface of OpenMeetings.

Run MySQL, if not:

`mysql.server start`

...and run red5-OpenMeetings (maybe in other shell window):

`/opt/red5-mac start`

...wait 10 seconds until it is completely running and after this, with the browser go to:

<http://localhost:5080/openmeetings/install>

...there will appear a page similar to this one:

OpenMeetings


1. **Enabling Image Upload and import to whiteboard**
 - o Install **ImageMagick** on the server, you can get more information on <http://www.imagemagick.org> regarding installation. The instructions for installation can be found there <http://www.imagemagick.org/script/binary-releases.php>, however on most linux systems you can get it via your favorite package managers (apt-get it)
2. **Enabling import of PDFs into whiteboard**
 - o Install **GhostScript** on the server, you can get more information on <http://pages.cs.wisc.edu/~ghost/> regarding installation. The instructions for installation can be found there, however on most linux systems you can get it via your favorite package managers (apt-get it).
 - o Install **SWFTools** on the server, you can get more information on <http://www.swftools.org/> regarding installation. Some of the Linux distributions already have it in there package manager see <http://packages.debian.org/unstable/utils/swftools>, the recommended version of **SWFTools** is 0.9 as prior version have a bug that does lead to wrong object dimensions in the Whiteboard
3. **Enabling import of .doc, .docx, .ppt, .pptx, ... all Office Documents into whiteboard**
 - o **OpenOffice-Service** started and listening on port 8100, see [OpenOfficeConverter](#) for details
4. **Enabling Recording and import of .avi, .flv, .mov and .mp4 into whiteboard**
 - o Install **FFmpeg**. You should get FFmpeg in an up to date copy! For Windows you can download a Build for example from <http://ffmpeg.arozcru.org/builds/> Linux or OSX Users should be able to use one of the various Installation Instructions on the Web. You need to enable libmp3lame!
 - o Install **SoX** <http://sox.sourceforge.net/>. You should install SoX in a up to date copy! SoX 12.xx will NOT work!


If you have further questions or need support in installation or hosting:

Community-Support:

[Mailing lists](#)

Commercial-Support:

...push on  (bottom), and will show the default database configuration with Derby, but we should use MySQL (MariaDB):

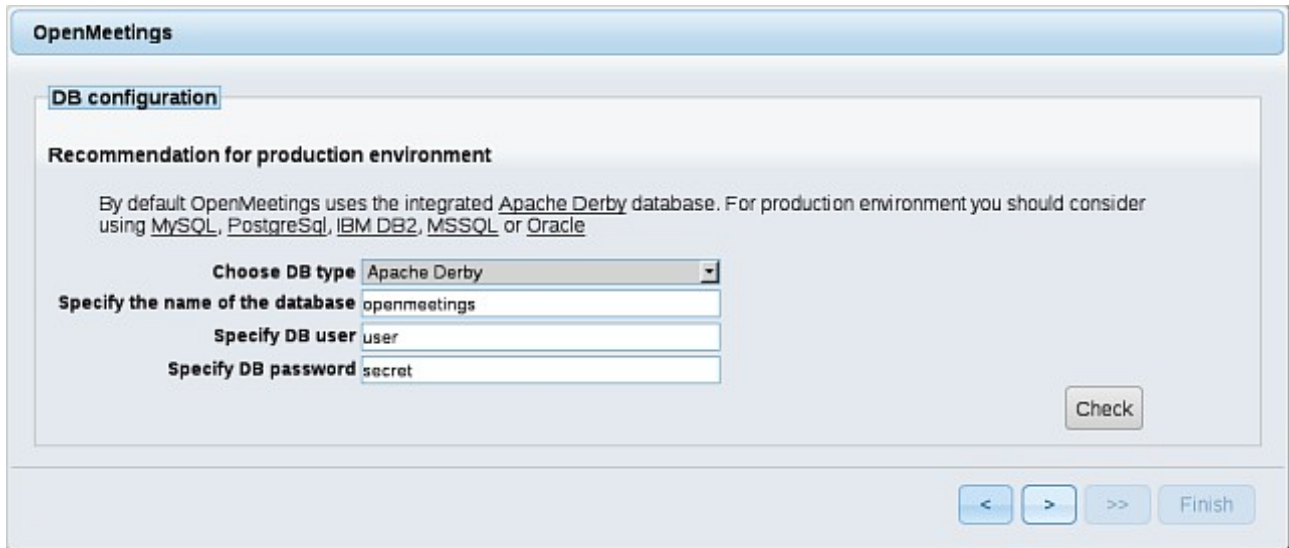

OpenMeetings

DB configuration

Recommendation for production environment

By default OpenMeetings uses the integrated Apache Derby database. For production environment you should consider using MySQL, PostgreSql, IBM DB2, MSSQL or Oracle

Choose DB type Apache Derby

Specify the name of the database openmeetings


Specify DB user user

Specify DB password secret

Check

< > >> Finish

...then, scroll and **Choose DB type** to MySQL:

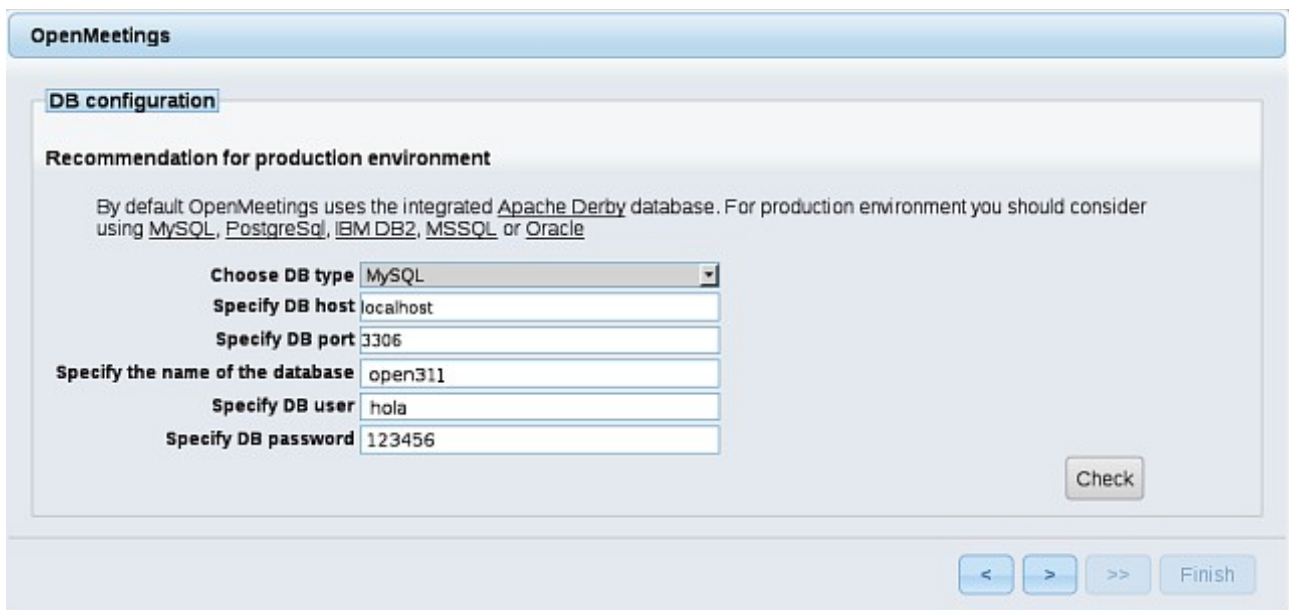

OpenMeetings

DB configuration

Recommendation for production environment

By default OpenMeetings uses the integrated Apache Derby database. For production environment you should consider using MySQL, PostgreSql, IBM DB2, MSSQL or Oracle

Choose DB type MySQL

Specify DB host localhost

Specify DB port 3306

Specify the name of the database open311


Specify DB user hola

Specify DB password 123456

Check

< > >> Finish

...will show the data base configuration we made in step 13, or with your own modifications.

Please, push  button, and will go to:

Now we must introduce the followings data:

Username = a-name ...this user will be administrator.

Userpass = password ...for the previous user.

Email = email-adress ...of the previous user.

User Time Zone = Country where is this server

Name = example-openmeetings ...group name to choose.

When the installation be finished, should configure the rest.


Go to bottom and push the button  (double arrow). Will show this window:

Push **Finish** button ...wait a seconds untill the tables are fill in the database.

When has concluded, this another page will appear. **Don't** clic on [Enter the Application](#).

First is need it to restart the server. Please, open a new shell window, and run this command:

`/opt/red5-mac restart`

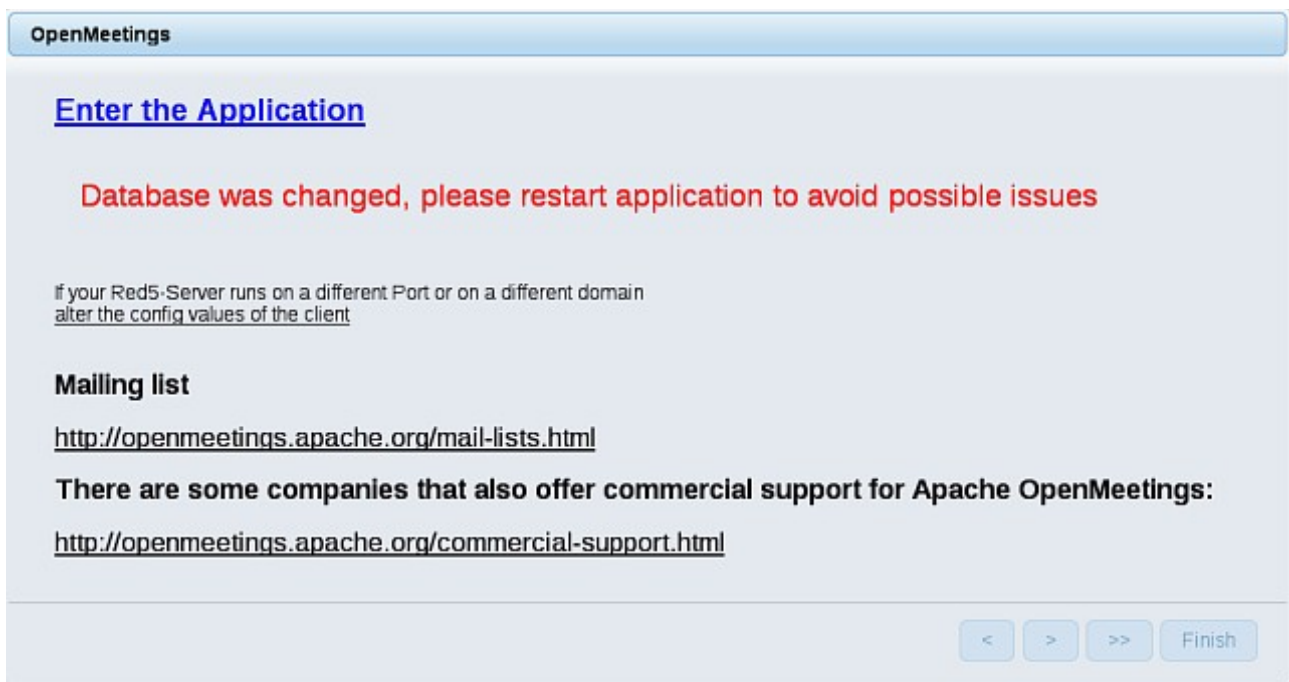

Now yes, you can clic on **Enter the Application**, or go with your browser to:

<http://localhost:5080/openmeetings>

...and will take us to the entry of OpenMeetings:

The screenshot shows a "Login" form. It has a title "Login" in a blue header. Below the header, there are two input fields: "Username or mail address" and "Password". To the right of the "Password" field is a checkbox labeled "Remember login". Below the input fields, there are two links: "Forgotten your password?" and "Network testing". At the bottom of the form, there are two buttons: "Not a member?" and "Sign in".

Introduce the user's name and the password that you have chosen during the installation, push **Sign in** button and...

...**Congratulations!**

The next time that you like to accede to OpenMeetings will be:

<http://localhost:5080/openmeetings>

Remember to open in the server the two following ports:

1935 5080


...in order that it could accede to OpenMeetings from other machines, in Lan or Internet.

16)

----- **Configuration of OpenMeetings** -----

Once you accede to OpenMeetings, please go to:

Administration → Configuration

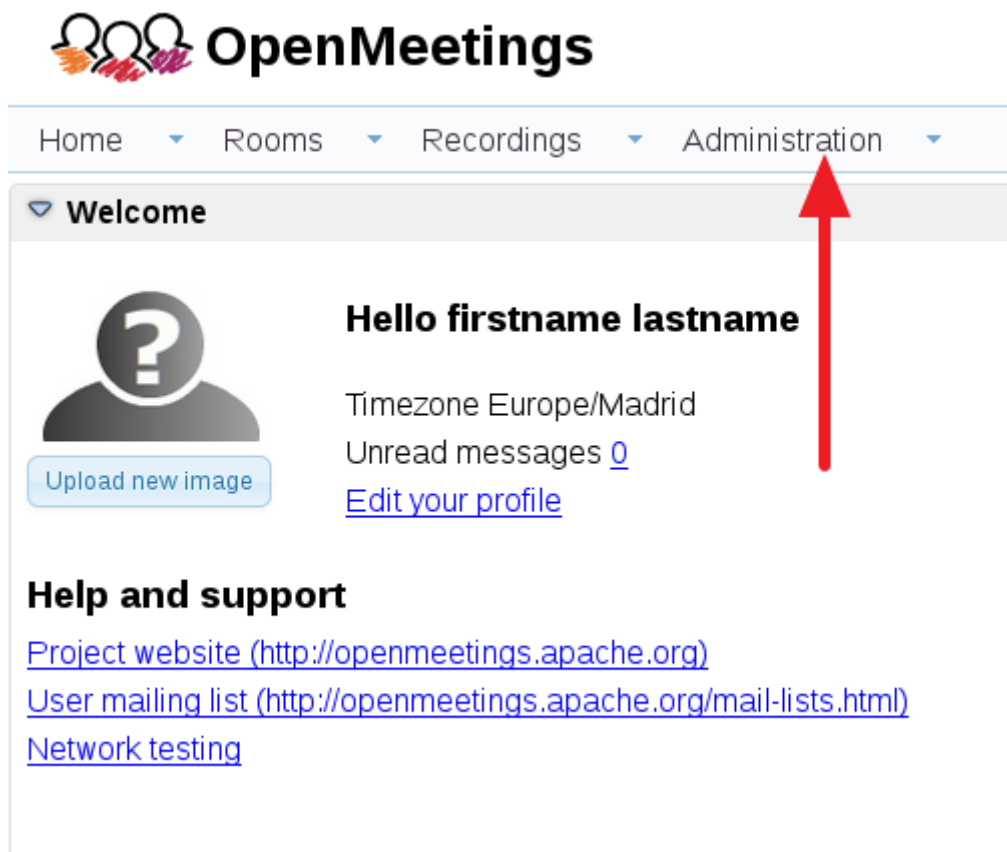

...introduce the parameters for the conversion of files, the audio and the video:

ID	Key	Value
4
5	default_group_id	1
6	smtp_server	localhost
7	smtp_port	25
8	system_email_addr	...
9	email_username	...
10	email_userpass	123456
11	mail.smtp.starttls.enable	0
12	mail.smtp.connection.timeout	30000
13	mail.smtp.timeout	30000
14	application.name	OpenMeetings
15	default_lang_id	1
16	swftools_zoom	100
17	swftools_jpegquality	85
18	swftools_path	...
19	imagemagick_path	...
20	sox_path	...
21	ffmpeg_path	...
22	office.path	...
23	jod.path	...

Configuration

Key: swftools_path

Value:

Last update: 26.02.2016 08:48:28

Updated by: idoro

Comment: Path To SWF-Tools

Clic on: **swftools_path**...and to right in **Value** type: **/opt/local/bin**

Clic on: **imagemagick_path**...and to right in **Value** type: **/usr/local/bin**

Clic on: **sox_path**...and to right in **Value** type: **/usr/local/bin**

Clic on: **ffmpeg_path**...and to right in **Value** type: **/usr/local/bin**

Clic on: **office.path**...and to right in **Value** type : **/Applications/OpenOffice.app/Contents**

Clic on: **jod.path**...and to right in **Value** type: **/Users/you-user/jodconverter-core-3.0-beta-4/lib**
remember modify **.../you-user/...** by your real user name :)

Remember save after each change (**arrow number 3**, in the up screenshot).

Now there is OpenMeetings ready to work rightly.

And this is all.

If you have some doubt or question, please raise it in the Apache OpenMeetings forums:

<http://openmeetings.apache.org/mail-lists.html>

Thank you.

Alvaro Bustos