



## Installation of Apache OpenMeetings 3.3.1 on openSUSE Leap 42.2

This tutorial is made based on fresh installations of

**openSUSE-Leap-42.2-DVD-x86\_64.iso**

It is tested with positive result. We will use the Apache's binary version OpenMeetings 3.3.1 stable, that is to say will suppress his compilation. It is done step by step.

8-9-2017

Starting...

1)

----- Update Operative System -----

Update operative system:

`zypper refresh`

`zypper update`

2)

----- Installation of Oracle Java 1.8 -----

Java **1.8** it is necessary to work OpenMeetings **3.3.1**. So, we install Oracle Java 1.8. Open Java gives an error in some OpenMeetings function. It is tested:

`cd /opt`

After paste the lines, press space button keyboard and Enter. Download the file:

(All in one line only. 1<sup>a</sup> and 2<sup>a</sup> without space between them. A space to the 3<sup>a</sup>. Together 3<sup>a</sup> and 4<sup>a</sup>)

```
wget --no-cookies --no-check-certificate --header "Cookie: gpw_e24=http%3A%2F%2Fwww.oracle.com%2F; oraclelicense=accept-securebackup-cookie"
http://download.oracle.com/otn-pub/java/jdk/8u144-b01/090f390dda5b47b9b721c7dffa008135/jdk-8u144-linux-x64.rpm
```

...and install it:

```
zypper install jdk-8*.rpm    ...type i (ignore) when ask about sign verification.
```

```
zypper install update-alternatives
```

We do to Oracle, the default java system:

```
update-alternatives --install /usr/bin/java java /usr/java/jdk1.8.0_144/bin/java 1551
```

```
update-alternatives --install /usr/bin/javadoc javadoc /usr/java/jdk1.8.0_144/bin/javadoc 1551
```

```
update-alternatives --install /usr/bin/jar jar /usr/java/jdk1.8.0_144/bin/jar 1551
```

```
update-alternatives --install /usr/bin/javap javap /usr/java/jdk1.8.0_144/bin/javap 1551
```

```
update-alternatives --install /usr/bin/javac javac /usr/java/jdk1.8.0_144/bin/javac 1551
```

```
update-alternatives --install /usr/bin/javah javah /usr/java/jdk1.8.0_144/bin/javah 1551
```

```
update-alternatives --install /usr/bin/jarsigner jarsigner /usr/java/jdk1.8.0_144/bin/jarsigner 1551
```

Maybe is installed different versions of Java. We select the just installed Oracle Java:

```
update-alternatives --config java
```

And to see if the selected version is active:

```
java -version
```

3)

### ----- Installation of LibreOffice -----

OpenMeetings need LibreOffice to convert to pdf, the uploaded office files.

Maybe it is installed, but for iso server:

```
zypper install -y libreoffice
```

4)

----- **Installation of necessary packages and libraries** -----

We install packages and libraries that we'll need later:

(Only one line with space between both)

```
zypper install -y gcc ghostscript unzip freetype freetype-devel ncurses ncurses-devel make libz1  
zlib-devel libtool bzip2 file-roller git autoconf automake pkg-config nmap nano
```

5)

----- **Installation ImageMagick, Sox and Swftools** -----

**ImageMagick**, will work with images files jpg, png, gif, etc. We install it and some librarie:

```
zypper install -y ImageMagick giflib-devel
```

**Sox**, work the sound. Install it:

```
zypper install -y sox
```

**Swftools**. LibreOffice convert to pdf the uploaded office files, and Swftools convert these pdf to swf (flash file), that later will show in the whiteboard. Also convert jpg2swf, png2swf, gif2swf, etc. Don't install a newer version, surely have not pdf2swf.

```
zypper install -y swftools
```

...block the version to prevent changes, because this repo version have pdf2swf:

```
zypper al swftools
```

6)

----- **Installation of Adobe Flash Player** -----

OpenMeetings even need Adobe Flash Player for rooms.

Add Adobe repo and install it:

```
sudo zypper ar --check --refresh http://linuxdownload.adobe.com/linux/x86_64/ adobe
```

```
sudo zypper se -s -r adobe
```

(Only one line without space between both)

```
sudo rpm -ivh http://linuxdownload.adobe.com/adobe-release/adobe-release-x86_64-1.0-1.noarch.rpm
```

```
sudo rpm --import /etc/pki/rpm-gpg/RPM-GPG-KEY-adobe-linux
```

```
sudo zypper install flash-plugin      ...type i (ignore) when ask about sign verification.
```

7)

### ----- Compilation of FFmpeg -----

FFmpeg work video. We install Packman repository to can install some libraries:

(Only one line with space between both)

```
zypper ar -f -n packman http://ftp.gwdg.de/pub/linux/misc/packman/suse/openSUSE_Leap_42.2/repo_packman
```

```
zypper update      ...when ask, accept for ever.
```

(Only one line with space between both)

```
zypper install -y glibc imlib2 imlib2-devel mercurial cmake freetype2-devel libfreetype6 curl git vlc libogg-devel libtheora-devel libvorbis-devel libvpx-devel fdk-aac-devel libmp3lame-devel
```

This ffmpeg compilation is based in this url, updated to 8-9-2017:

<https://trac.ffmpeg.org/wiki/CompilationGuide/Centos>

I made a script that will download, compile and install ffmpeg. Download the script:

```
cd /opt
```

```
wget https://cwiki.apache.org/confluence/download/attachments/27838216/ffmpeg-opensuse42.sh
```

...concede permission of execution:

```
chmod +x ffmpeg-opensuse42.sh
```

...and run it, be connected to Internet:

```
./ffmpeg-opensuse42.sh
```

Will spend about 10-20 minutes. When finish, will announce it with this text:

## FFMPEG Compilation is Finished!

Then, please, go to **step 8**).

But if you prefer copy and paste, i **don't advise**, here are the commands script:

```
nano /opt/ffmpeg-opensuse422.sh
```

...copy the green text **from here**:

```
# FFmpeg compilation for openSUSE Leap 42.2 and 42.3
# Alvaro Bustos, thanks to Hunter.
# Updated 8-9-2017
# Install libraries

zypper install -y autoconf automake cmake freetype-devel gcc gcc-c++ git libtool make mercurial
nasm pkgconfig zlib-devel

# Install yasm from repos
zypper install -y yasm

# Create a temporary directory for sources.
SOURCES=$(mkdir ~/ffmpeg_sources)
cd ~/ffmpeg_sources

# Download the necessary sources.
#git clone --depth 1 git://git.videolan.org/x264
curl -#LO ftp://ftp.videolan.org/pub/x264/snapshots/last_stable_x264.tar.bz2
hg clone https://bitbucket.org/multicoreware/x265
git clone --depth 1 git://git.code.sf.net/p/opencore-amr/fdk-aac
curl -L -O http://downloads.sourceforge.net/project/lame/lame/3.99/lame-3.99.5.tar.gz
wget http://downloads.xiph.org/releases/opus/opus-1.1.5.tar.gz
wget http://downloads.xiph.org/releases/ogg/libogg-1.3.2.tar.gz
wget http://downloads.xiph.org/releases/vorbis/libvorbis-1.3.5.tar.gz
wget http://downloads.xiph.org/releases/theora/libtheora-1.1.1.tar.gz
git clone --depth 1 https://chromium.googlesource.com/webm/libvpx.git
git clone --depth 1 git://source.ffmpeg.org/ffmpeg

# Unpack files
for file in `ls ~/ffmpeg_sources/*.tar.*`; do
tar -xvf $file
done

cd x264-*/
./configure --prefix="$HOME/ffmpeg_build" --bindir="$HOME/bin" --enable-static && make &&
make install && make distclean; cd ..

cd x265/build/linux
cmake -G "Unix Makefiles" -DCMAKE_INSTALL_PREFIX="$HOME/ffmpeg_build"
```

```

-DENABLE_SHARED:bool=off .././source && make && make install; cd ~/ffmpeg_sources

cd fdk-aac
autoreconf -fiv && ./configure --prefix="$HOME/ffmpeg_build" --disable-shared && make &&
make install && make distclean; cd ..

cd lame-*/
./configure --prefix="$HOME/ffmpeg_build" --bindir="$HOME/bin" --disable-shared --enable-
nasm && make && make install && make distclean; cd ..

cd opus-*/
autoreconf -fiv && ./configure --prefix="$HOME/ffmpeg_build" --disable-shared && make &&
make install && make distclean; cd ..

cd libogg-*/
./configure --prefix="$HOME/ffmpeg_build" --disable-shared && make && make install &&
make distclean; cd ..

cd libvorbis-*/
LDLFLAGS="-L$HOME/ffmpeg_build/lib64" CPPFLAGS="-I$HOME/ffmpeg_build/include"
./configure --prefix="$HOME/ffmpeg_build" --with-ogg="$HOME/ffmpeg_build" --disable-shared
&& make && make install && make distclean; cd ..

cd libtheora-*/
./configure --prefix="$HOME/ffmpeg_build" --with-ogg="$HOME/ffmpeg_build" --disable-
examples --disable-shared --disable-sdltest --disable-vorbistest && make && make install; cd ..

cd libvpx
./configure --prefix="$HOME/ffmpeg_build" --disable-examples && make && make install &&
make clean; cd ..

cp /root/ffmpeg_build/lib/pkgconfig/x264.pc /root/ffmpeg_build/lib64/pkgconfig
cp /root/ffmpeg_build/lib/pkgconfig/x265.pc /root/ffmpeg_build/lib64/pkgconfig

cd ffmpeg
PKG_CONFIG_PATH="$HOME/ffmpeg_build/lib64/pkgconfig" ./configure
--prefix="$HOME/ffmpeg_build" --extra-cflags="-I$HOME/ffmpeg_build/include" --extra-
ldflags="-L$HOME/ffmpeg_build/lib" --bindir="$HOME/bin" --pkg-config-flags="--static"
--enable-gpl --enable-nonfree --enable-libfdk_aac --enable-libfreetype --enable-libbmp3lame
--enable-libopus --enable-libvorbis --enable-libvpx --enable-libx264 --enable-libx265 --enable-
libtheora && make && make install && make distclean && hash -r; cd ..

cd ~/bin
cp ffmpeg ffprobe ffserver lame x264 /usr/local/bin

cd ~/ffmpeg_build/bin
cp x265 /usr/local/bin

echo "FFMPEG Compilation is Finished!"

```

...to here.

Concede permission of execution:

```
chmod +x /opt/ffmpeg-opensuse422.sh
```

```
cd /opt
```

Now be connected to Internet, run the script, and wait some long minutes while the compilation:

```
./ffmpeg-opensuse422.sh
```

All the compiled files will be installed on: /usr/local/bin

8)

#### ----- Installation of MariaDB data server -----

MariaDB is the data server.

We install it:

```
zypper install -y mariadb mariadb-tools
```

...and run mariadb:

```
systemctl start mysql.service
```

Give a password to MariaDB root . Please, modify **new-password** by your own:

```
mysqladmin -u root password new-password
```

Make a database with his own user for OpenMeetings:

```
mysql -u root -p
```

...will ask for the root-mariadb password that we have just chosen:

```
MariaDB [(none)]> CREATE DATABASE open331 DEFAULT CHARACTER SET 'utf8';
```

Now we create a user with all permission on this database. User password must be of 8 digits minimum with letter case, numbers or characters + \* % etc:

(Only one line with space between both)

```
MariaDB [(none)]> GRANT ALL PRIVILEGES ON open331.* TO 'hola'@'localhost'  
IDENTIFIED BY '1a2B3c4D' WITH GRANT OPTION;
```

- \* `open331` .....is the database name.
- \* `hola` .....is the user name for the database.
- \* `1a2B3c4D` ..is the password of this user.

You can change the data...but remember it! Later we'll need it.  
Now, we leave MariaDB:

```
MariaDB [(none)]> quit
```

9)

### ----- Installation of OpenMeetings -----

We'll install OpenMeetings in `/opt/red5331`. All the following information will be based on this directory.

Make the folder:

```
mkdir /opt/red5331
```

```
cd /opt/red5331
```

...and download the OpenMeetings file:

```
wget http://apache.miloslavbrada.cz/openmeetings/3.3.1/bin/apache-openmeetings-3.3.1.zip
```

```
unzip apache-openmeetings-3.3.1.zip
```

...save the unloaded file to `/opt`:

```
mv apache-openmeetings-3.3.1.zip /opt
```

Download and install the connector file between OpenMeetings and MariaDB:

```
cd /opt
```

(Only one line without space between both)

```
wget http://repo1.maven.org/maven2/mysql/mysql-connector-java/5.1.42/mysql-connector-java-5.1.42.jar
```

...and copy it to where must be:

```
cp /opt/mysql-connector-java-5.1.42.jar /opt/red5331/webapps/openmeetings/WEB-INF/lib
```

Now we are going to configure OpenMeetings for our database in MariaDB:

```
nano /opt/red5331/webapps/openmeetings/WEB-INF/classes/META-INF/mysql_persistence.xml
```

**Modify on line 72:**



```
, Url=jdbc:mysql://localhost:3316/openmeetings_3_3?
```

...to

```
, Url=jdbc:mysql://localhost:3316/open331?
```

...it is the name of the database that we did initially.

Logically, if initially you choose another name for the database, you must type it here.

Press **Ctrl+x**, **Y** and **Enter** in the keyboard, to save and leave nano.

We protect the access to the file:

(Only one line without space between both)

```
chmod 640 /opt/red5331/webapps/openmeetings/WEB-INF/classes/META-INF/mysql_persistence.xml
```

10)

----- Script to launch red5-OpenMeetings -----

We'll download the script to run red5-OpenMeetings:

```
cd /opt
```

```
wget https://cwiki.apache.org/confluence/download/attachments/27838216/red5-2
```

...copy it to where must be:

```
cp red5-2 /etc/init.d/
```

...concede execution permission:

```
chmod +x /etc/init.d/red5-2
```

If you made the installation in any other different path to /opt/red5331, please edit the script and modify the line:

```
export RED5_HOME=/opt/red5331
```

...to

```
export RED5_HOME=/your-path-installation
```

11)

----- Run red5-OpenMeetings -----

Restart mariadb, (be connected to Internet):

```
systemctl restart mysql.service
```

...and run red5-OpenMeetings, please, in a new window terminal (be connected to Internet):

```
/etc/init.d/red5-2 start
```

...wait till the text “**clearSessionTable: 0**” it is the last in the terminal.

Then, go with the browser to:

<http://localhost:5080/openmeetings/install>

...there will appear a page similar to this one:

OpenMeetings

1. Enabling import of PDFs into whiteboard

- Install **GhostScript** on the server, you can get more information on <http://pages.cs.wisc.edu/~ghost/> regarding installation. The instructions for installation can be found there, however on most linux systems you can get it via your favorite package managers (apt-get it).
- Install **SWFTTools** on the server, you can get more information on <http://www.swftools.org/> regarding installation. Some of the Linux distributions already have it in there package manager see <http://packages.debian.org/unstable/utils/swftools>, the recommended version of **SWFTTools** is 0.9 as prior version have a bug that does lead to wrong object dimensions in the Whiteboard

**If you have further questions or need support in installation or hosting:**


**Community-Support:**

[Mailing lists](#)

**Commercial-Support:**

[Commercial-Support](#)

< > >> Finish

...press on  (bottom), and will show the default configuration with Derby, but we employ MySQL (MariaDB):

OpenMeetings

DB configuration

**Recommendation for production environment**

By default OpenMeetings uses the integrated Apache Derby database. For production environment you should consider using MySQL, PostgreSQL, IBM DB2, MSSQL or Oracle

**NOTE** Please use unpredictable DB login and 'strong' password with length 8 characters or more.

**Choose DB type**

**Specify the name of the database**

...then, scroll and **Choose DB type** to MySQL:

OpenMeetings

DB configuration

**Recommendation for production environment**

By default OpenMeetings uses the integrated Apache Derby database. For production environment you should consider using MySQL, PostgreSQL, IBM DB2, MSSQL or Oracle

**NOTE** Please use unpredictable DB login and 'strong' password with length 8 characters or more.

**Choose DB type**

**Specify DB host**

**Specify DB port**

**Specify the name of the database**

**Specify DB user**

**Specify DB password**


...will show the database configuration we made in step 9.


If you`ve choose any other different name for this, will show equally.

Now we must introduce the user name we did for our data base, at the step 8, and his password:

**Specify DB user** = [hola](#)

**Specify DB password** = [1a2B3c4D](#)

Please, press  button, and will go to:

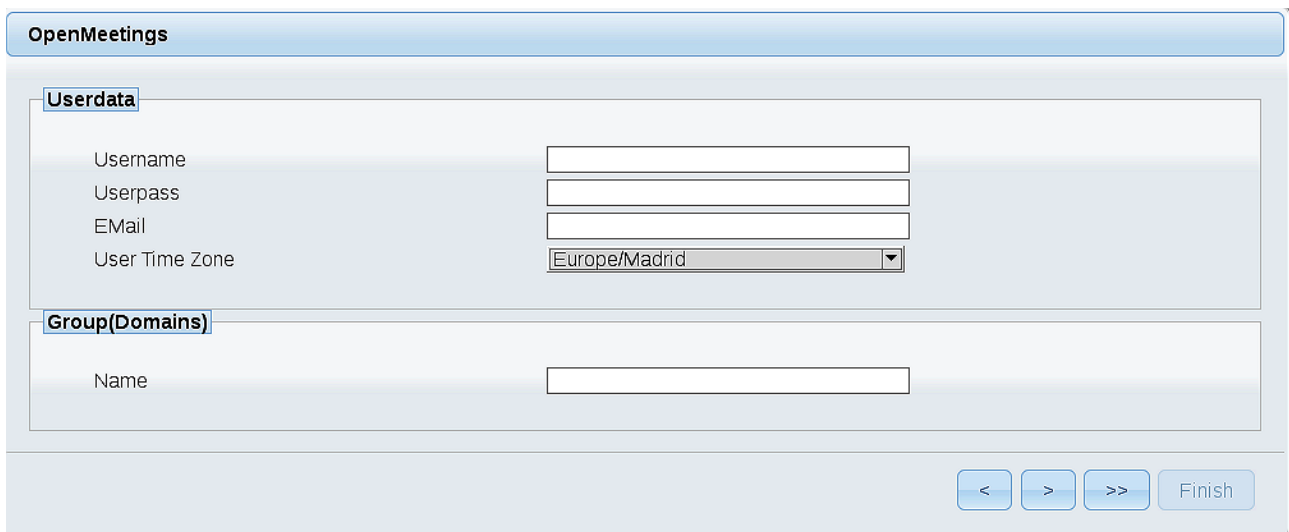

Here, we must introduce a user name for OpenMeetings, and his password. This must have 8 digits minimum, and at least 1 special symbol like: +(%#!...etc.


**Username** = a-name ...this user will be administrator.

**Userpass** = a-password ...for the previous user.

**Email** = email-adress ...of the previous user.

**User Time Zone** = country where is this server

**Name** = example-openmeetings ...group name to choose.

Press the button  and will lead us to a new page (below) where you can select the language for your OpenMeetings server, as well as other options such as the configuration of the mail server being used to send invitations or meetings from OpenMeetings.

**OpenMeetings**

**Configuration**

Allow self-registering (allow_frontend_register)	Yes <input type="button" value="v"/>
Send Email to new registered Users (sendEmailAtRegister)	No <input type="button" value="v"/>
New Users need to verify their EMail (sendEmailWithVerificationCode)	No <input type="button" value="v"/>
Default Rooms of all types will be created	Yes <input type="button" value="v"/>
Mail-Referer (system_email_addr)	<input type="text" value="noreply@openmeetings.apache.org"/>
SMTP-Server (smtp_server)	<input type="text" value="localhost"/>
SMTP-Server Port(default SmtP-Server Port is 25) (smtp_port)	<input type="text" value="25"/>
SMTP-Username (email_username)	<input type="text"/>
SMTP-Userpass (email_userpass)	<input type="text"/>
Enable TLS in Mail Server Auth	No <input type="button" value="v"/>
Set inviter's email address as ReplyTo in email invitations (inviter.email.as.replyto)	Yes <input type="button" value="v"/>
Default Language	inglés <input type="button" value="v"/>
Default Font for Export [default_export_font]	TimesNewRoman <input type="button" value="v"/>

A valid example to configure the mail server with Gmail, is as follows:  
(replace **john@gmail.com** with your real Gmail account)


<b>Mail-Refer (system_email_addr)</b>	== <a href="mailto:john@gmail.com" style="color: blue;">john@gmail.com</a>
<b>SMTP-Server (smtp_server)</b>	== <a href="mailto:smtp.gmail.com" style="color: blue;">smtp.gmail.com</a>
<b>SMTP-Server Port (default SmtP-Server Port is 25) (smtp_port)</b>	== <a href="mailto:587" style="color: blue;">587</a>
<b>SMTP-Username (email_username)</b>	== <a href="mailto:john@gmail.com" style="color: blue;">john@gmail.com</a>
<b>SMTP-Userpass (email_userpass)</b>	== <a href="mailto:password of john@gmail.com" style="color: blue;">password of john@gmail.com</a>
<b>Enable TLS in Mail Server Auth</b>	== <a href="mailto:Yes" style="color: blue;">Yes</a>

To select the language of your server OpenMeetings, please scroll on the line:

<b>Default Language</b>	== <a href="mailto:english" style="color: blue;">english</a>
-------------------------	--

...the rest we can leave as is. If necessary, can modify it as you like it:

Now press the button  and a new page will appear:

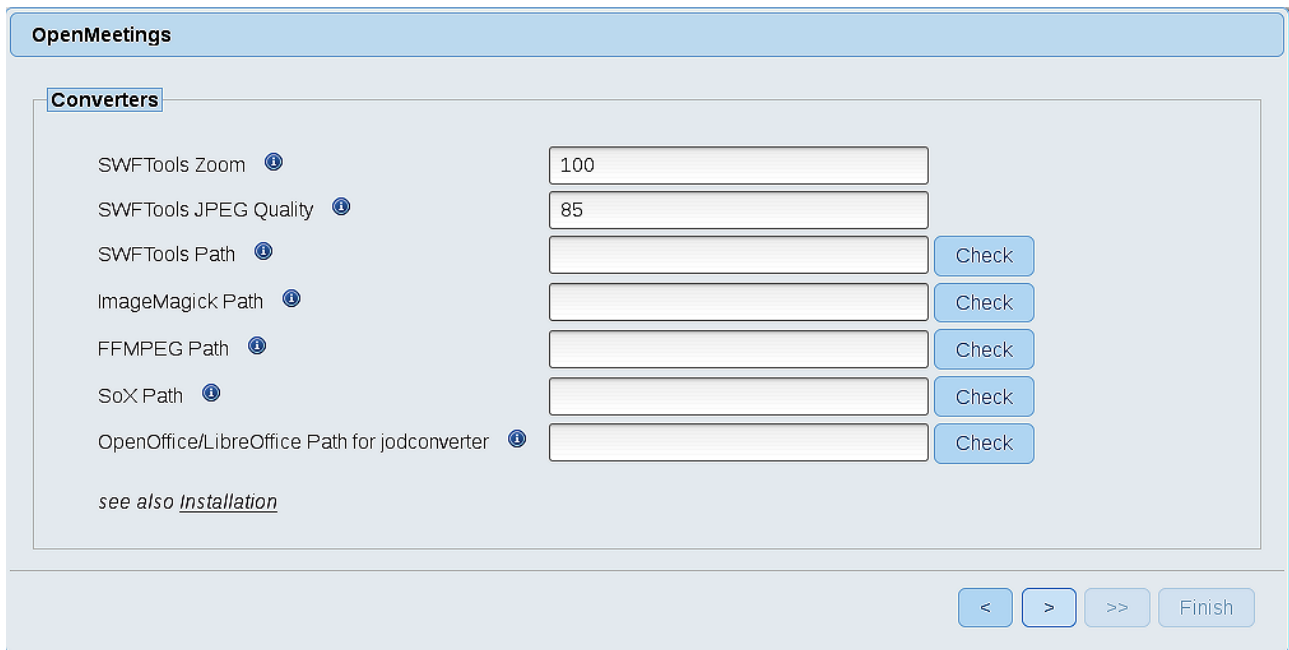

**OpenMeetings**

**Converters**

SWFTools Zoom ⓘ

SWFTools JPEG Quality ⓘ

SWFTools Path ⓘ

ImageMagick Path ⓘ

FFMPEG Path ⓘ

SoX Path ⓘ

OpenOffice/LibreOffice Path for jodconverter ⓘ

see also [Installation](#)

< > >> Finish

Here we'll introduce the respective paths for the image, video, audio and conversion of uploaded files:

**SWFTools Path (Path)** == [/usr/bin](#)


**ImageMagick Path (Path)** == [/usr/bin](#)

**FFMPEG Path (Path)** == [/usr/local/bin](#)

**SOX Path (Path)** == [/usr/bin](#)

**OpenOffice/LibreOffice Path (Path) for jodconverter** == [/usr/lib64/libreoffice](#)

As you go introducing paths, you can check if they are correct by pressing the button labeled **Check**. If it does not display any error message, that is OK.

Once completed the paths, please click the  button and move on to another page that would be to activate the SIP. We will leave it as is, unless you want to activate it knowing what it does:

**OpenMeetings**

**Crypt Type**

Crypt Class

*You can use this default crypt type which is equal to PHP-MD5 function or BSD-Style encryption by using: **org.apache.openmeetings.util.crypt.MD5CryptImplementation** for more information or to write your own Crypt-Style see: [Custom Crypt Mechanism](#) You can edit this value later BUT previous created Users and Sessions might be not usable anymore*

**red5SIP Configuration**

Enable SIP

*Enable red5SIP integration*

SIP rooms prefix

*Prefix for phone number of conference rooms*

SIP extensions context

*Context of Asterisk extensions*


Now push the button  Will show this window:

**OpenMeetings**

Please click "Finish" button to start installation!

Press **Finish** button...wait a seconds until the tables are fill in the database.  
 When has concluded, this another page will appear. **Don't** clic on [Enter the Application](#).  
 First is need it to restart the server. Please, open a new terminal and restart red5:

[/etc/init.d/red5-2 restart](#)

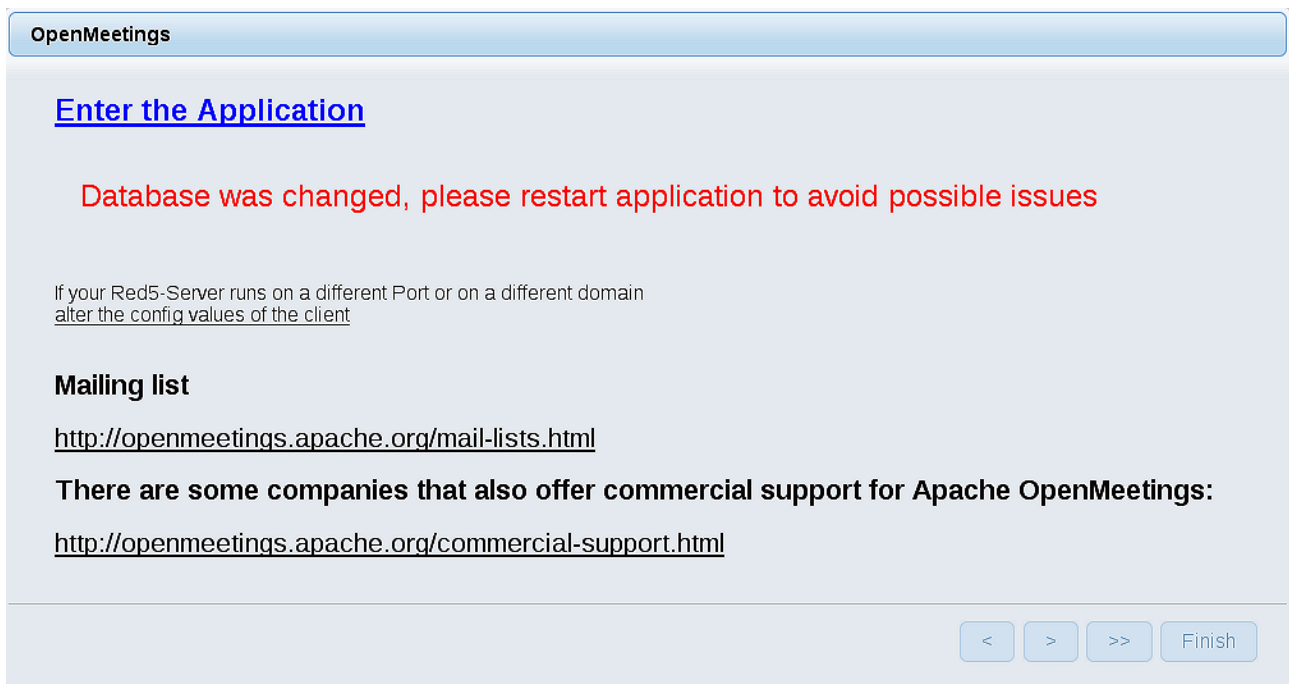

Now yes, you can clic on [Enter the Application](#), or go with your browser to:

<http://localhost:5080/openmeetings>

...and will take us to the entry of OpenMeetings:

The screenshot shows a "Login" form. It has a blue header bar with the text "Login". Below the header, there are two input fields: "Username or mail address" and "Password". To the right of the "Password" field is a checkbox labeled "Remember login". Below the input fields, there are two links: "Forgotten your password?" and "Network testing". At the bottom, there are two buttons: "Not a member?" and "Sign in".

Introduce the user's name and the password that you have chosen during the installation, push **Sign in** button and...



**...Congratulations!**

The next time that you like to accede OpenMeetings, would be:

<http://localhost:5080/openmeetings>

Remember to open in the server, the two following ports:

**1935 5080**


...in order that it could accede to OpenMeetings from other machines from Lan or Internet.

12)

**----- OpenMeetings's configuration -----**

Once you acced to OpenMeetings, if you would like to do any modification in the configuration, please go to:

**Administration → Configuration**

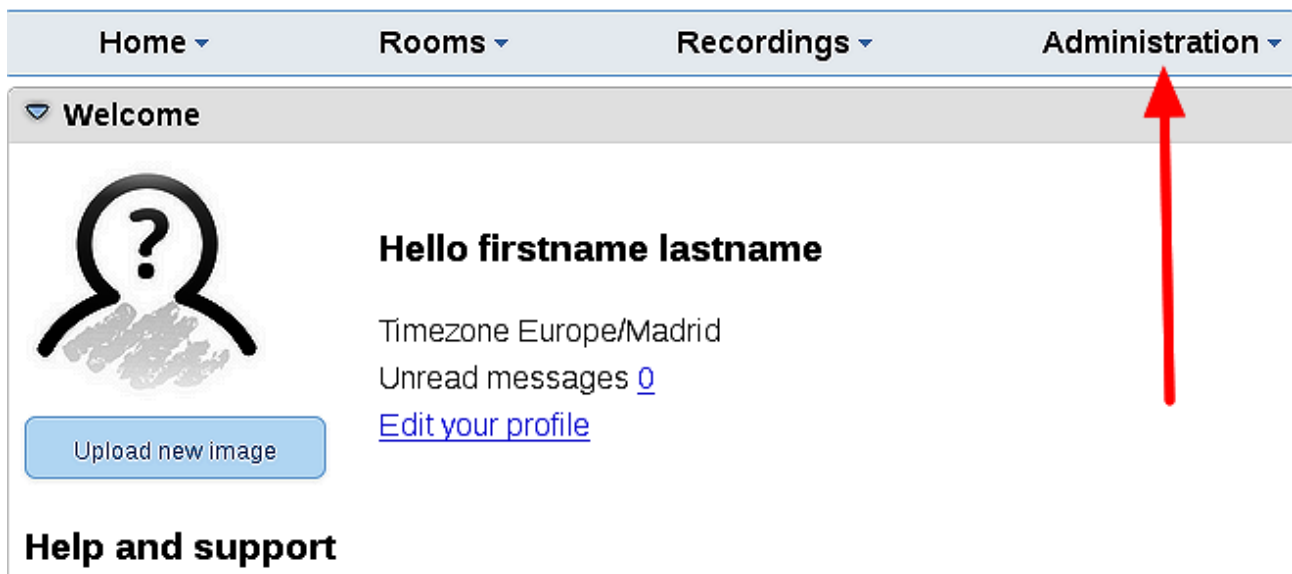

...and following the order of the red arrows:

ID	Key	Value
4	allow.oauth.register	1
5	default_group_id	1
6	smtp_server	localhost
7	smtp_port	25
8	system_email_addr	noreply@openmeetings.apache.org
9	email_username	
10	email_userpass	
11	mail.smtp.starttls.enable	0
12	mail.smtp.connection.timeout	30000
13	mail.smtp.timeout	30000
14	application.name	OpenMeetings
15	default_lang_id	1
16	swftools_zoom	100
17	swftools_jpegquality	85
18	swftools_path	
19	imagemagick_path	
20	sox_path	
21	ffmpeg_path	
22	office.path	

**Configuration**

Key: swftools\_path

Value:

Last update:

Updated by:

Comment: Path To SwF-Tools

1 → (points to row 18 in table)

2 → (points to Value field in configuration)

3 → (points to Configuration window title)

And this is all.



If you have some doubt or question, please raise it in the Apache OpenMeetings forums:

<http://openmeetings.apache.org/mail-lists.html>



Thank you.

Alvaro Bustos