



## **Installation of Apache OpenMeetings 4.0.0 on openSUSE 13.2 32bit**

This tutorial is made based on fresh installations of

**openSUSE-13.2-GNOME-Live-i686.iso**

It is tested with positive result. We will use the Apache's binary version OpenMeetings 4.0.0 stable, that is to say will suppress his compilation. It is done step by step.

5-11-2017

Starting...

1)

----- Update Operative System -----

Update operative system:

[zypper refresh](#)

[zypper update](#)

2)

**----- Installation of Oracle Java 1.8 -----**

Java **1.8** it is necessary to work OpenMeetings **4.0.0**. We install Oracle Java 1.8.

```
cd /opt
```

Download the file:

(All in one line only. 1<sup>a</sup> and 2<sup>a</sup> without space between them. A space to the 3<sup>a</sup>. Together 3<sup>a</sup> and 4<sup>a</sup>)

```
wget --no-cookies --no-check-certificate --header "Cookie: gpw_e24=http%3A%2F%2Fwww.oracle.com%2F; oraclelicense=accept-securebackup-cookie"
http://download.oracle.com/otn-pub/java/jdk/8u152-b16/aa0333dd3019491ca4f6ddbe78cdb6d0/jdk-8u152-linux-i586.rpm
```

...and install it:

```
rpm -ivh jdk-8u152-linux-i586.rpm
```

```
zypper install update-alternatives
```

We do to Oracle, the default java system:

```
update-alternatives --install /usr/bin/java java /usr/java/jdk1.8.0_152/bin/java 1551
```

```
update-alternatives --install /usr/bin/javadoc javadoc /usr/java/jdk1.8.0_152/bin/javadoc 1551
```

```
update-alternatives --install /usr/bin/jar jar /usr/java/jdk1.8.0_152/bin/jar 1551
```

```
update-alternatives --install /usr/bin/javap javap /usr/java/jdk1.8.0_152/bin/javap 1551
```

```
update-alternatives --install /usr/bin/javac javac /usr/java/jdk1.8.0_152/bin/javac 1551
```

```
update-alternatives --install /usr/bin/javah javah /usr/java/jdk1.8.0_152/bin/javah 1551
```

```
update-alternatives --install /usr/bin/jarsigner jarsigner /usr/java/jdk1.8.0_152/bin/jarsigner 1551
```

Maybe you have installed different versions of Java. We select the just installed Oracle Java:

```
update-alternatives --config java
```

And to see if the selected version is active:

```
java -version
```

3)

----- **Installation of LibreOffice** -----

OpenMeetings need LibreOffice to convert to pdf the uploaded office files.

Maybe it is installed, but for iso server:

```
zypper install -y libreoffice
```

4)

----- **Installation of necessary packages and libraries** -----

We install packages and libraries that need later:

(Only one line with space between both)

```
zypper install -y gcc ghostscript unzip freetype freetype-devel ncurses ncurses-devel make libz1  
zlib-devel libtool bzip2 file-roller git autoconf automake pkg-config nmap nano
```

5)

----- **Installation ImageMagick and Sox** -----

**ImageMagick**, will work with images files jpg, gif, png, etc. We install it and some librarie:

```
zypper install -y ImageMagick giflib-devel
```

**Sox**, work the sound. Will compile it, 'cause it is newer version than the repos:

```
cd /opt
```

```
wget http://sourceforge.net/projects/sox/files/sox/14.4.2/sox-14.4.2.tar.gz
```

```
tar xzvf sox-14.4.2.tar.gz
```

```
cd /opt/sox-14.4.2
```

```
./configure
```

```
make && make install
```

6)

**----- Installation of Adobe Flash Player -----**

OpenMeetings even need Adobe Flash Player for cam. It find in the repos.  
We install it:

```
zypper install -y flash-player
```

7)

**----- Compilation of FFmpeg -----**

FFmpeg work video. We'll compile it. Now install paquets and libraries.

```
zypper install -y glibc imlib2 imlib2-devel mercurial cmake
```

```
zypper install -y freetype2-devel libfreetype6 curl git
```

```
zypper install -y libogg-devel libtheora-devel libvorbis-devel libvpx-devel
```

This ffmpeg compilation is based on this url, updated file versions 5-11-2017:

<https://trac.ffmpeg.org/wiki/CompilationGuide/Centos>

I made a script that will download, compile and install ffmpeg.  
The result of any recording we do in OpenMeetings, will be in mp4 format.

Download the script:

```
cd /opt
```

(Only one line without space between both)

```
wget https://cwiki.apache.org/confluence/download/attachments/27838216/ffmpeg-opensuse132-32bit.sh
```

...concede execution permission:

```
chmod +x ffmpeg-opensuse132-32bit.sh
```

...and run it (be connected to Internet):

```
./ffmpeg-opensuse132-32bit.sh
```

Will spend about 20-30 minutes. When is finished, will announce it:

## FFMPEG Compilation is Finished!

Then, please go to **step 8**).

But, if you prefer copy and paste, i **don't advise**, here are the commands script:

```
nano /opt/ffmpeg-opensuse.sh
```

...copy the green text **from here**:

```
# FFmpeg compilation for openSUSE 13.2, 32 bit only.
# Alvaro Bustos, thanks to Hunter.
# 5-11-2017
# Install libraries

zypper install -y autoconf automake cmake freetype-devel gcc gcc-c++ git libtool make mercurial
nasm pkgconfig zlib-devel

# Install yasm from repos
zypper install -y yasm

# Create a temporary directory for sources.
SOURCES=$(mkdir ~/ffmpeg_sources)
cd ~/ffmpeg_sources

# Download the necessary sources.
#git clone --depth 1 git://git.videolan.org/x264
curl -#LO ftp://ftp.videolan.org/pub/x264/snapshots/last_stable_x264.tar.bz2
hg clone https://bitbucket.org/multicoreware/x265
git clone --depth 1 git://git.code.sf.net/p/opencore-amr/fdk-aac
curl -L -O http://downloads.sourceforge.net/project/lame/lame/3.99/lame-3.99.5.tar.gz
wget https://sources.voidlinux.eu/opus-1.2.1/opus-1.2.1.tar.gz
wget http://downloads.xiph.org/releases/ogg/libogg-1.3.2.tar.gz
wget http://downloads.xiph.org/releases/vorbis/libvorbis-1.3.5.tar.gz
wget http://downloads.xiph.org/releases/theora/libtheora-1.1.1.tar.gz
git clone --depth 1 https://chromium.googlesource.com/webm/libvpx.git
# git clone --depth 1 git://source.ffmpeg.org/ffmpeg
wget http://ffmpeg.org/releases/ffmpeg-3.1.1.tar.gz

# Unpack files
for file in `ls ~/ffmpeg_sources/*.tar.*`; do
tar -xvf $file
done

cd x264-*/
./configure --prefix="$HOME/ffmpeg_build" --bindir="$HOME/bin" --enable-static && make &&
make install && make distclean; cd ..
```

```
cd x265/build/linux
cmake -G "Unix Makefiles" -DCMAKE_INSTALL_PREFIX="$HOME/ffmpeg_build"
-DENABLE_SHARED:bool=off ../../source && make && make install; cd ~/ffmpeg_sources

cd fdk-aac
autoreconf -fiv && ./configure --prefix="$HOME/ffmpeg_build" --disable-shared && make &&
make install && make distclean; cd ..

cd lame-*/
./configure --prefix="$HOME/ffmpeg_build" --bindir="$HOME/bin" --disable-shared --enable-
nasm && make && make install && make distclean; cd ..

cd opus-*/
autoreconf -fiv && ./configure --prefix="$HOME/ffmpeg_build" --disable-shared && make &&
make install && make distclean; cd ..

cd libogg-*/
./configure --prefix="$HOME/ffmpeg_build" --disable-shared && make && make install &&
make distclean; cd ..

cd libvorbis-*/
LDFLAGS="-L$HOME/ffmpeg_build/lib64" CPPFLAGS="-I$HOME/ffmpeg_build/include"
./configure --prefix="$HOME/ffmpeg_build" --with-ogg="$HOME/ffmpeg_build" --disable-shared
&& make && make install && make distclean; cd ..

cd libtheora-*/
./configure --prefix="$HOME/ffmpeg_build" --with-ogg="$HOME/ffmpeg_build" --disable-
examples --disable-shared --disable-sdltest --disable-vorbistest && make && make install; cd ..

cd libvpx
./configure --prefix="$HOME/ffmpeg_build" --disable-examples && make && make install &&
make clean; cd ..

cd ffmpeg-*/

PKG_CONFIG_PATH="$HOME/ffmpeg_build/lib/pkgconfig" ./configure
--prefix="$HOME/ffmpeg_build" --extra-cflags="-I$HOME/ffmpeg_build/include" --extra-
ldflags="-L$HOME/ffmpeg_build/lib" --bindir="$HOME/bin" --pkg-config-flags="--static"
--enable-gpl --enable-nonfree --enable-libfdk_aac --enable-libfreetype --enable-libmp3lame
--enable-libopus --enable-libvorbis --enable-libvpx --enable-libx264 --enable-libx265 --enable-
libtheora && make && make install && make distclean && hash -r; cd ..

cd ~/bin
cp ffmpeg ffprobe ffserver lame x264 /usr/local/bin

cd ~/ffmpeg_build/bin
cp x265 /usr/local/bin

echo "FFMPEG Compilation is Finished!"
```

...to here.

Concede permission of execution:

```
chmod +x /opt/ffmpeg-opensuse.sh
```

```
cd /opt
```

Now be connected to Internet, run the script and wait some long minutes while the compilation:

```
./ffmpeg-opensuse.sh
```

All the compiled files will be installed in: /usr/local/bin

8)

#### ----- Installation of MariaDB data server -----

MariaDB is the data server.

We install it:

```
zypper install -y mariadb mariadb-tools
```

...and run MariaDB:

```
systemctl start mysql.service
```

Give a password to mariadb root . Please, modify **new-password** by your own:

```
mysqladmin -u root password new-password
```

Make a database with his own user for OpenMeetings:

```
mysql -u root -p
```

...will ask for the mariadb root password you does just now:

```
MariaDB [(none)]> CREATE DATABASE open40 DEFAULT CHARACTER SET 'utf8';
```

With this command we has created a database called open40.

Now we create a user with all permission on this database. User password must be of 8 digits minimum:

(Only one line with space between both)

```
MariaDB [(none)]> GRANT ALL PRIVILEGES ON open40.* TO 'hola'@'localhost' IDENTIFIED BY '1a2B3c4D' WITH GRANT OPTION;
```

- \* open40 .....is the database name.
- \* hola .....is the user name for the database.
- \* 1a2B3c4D ..is the password of this user.

You can change the data...but remember it! Later we'll need it.  
Now, we leave MariaDB:

```
MariaDB [(none)]> quit
```

9)

#### ----- Installation of OpenMeetings -----

We'll install OpenMeetings in /opt/red540. All the following information will be based on this directory.

Make the folder:

```
mkdir /opt/red540
```

```
cd /opt/red540
```

...and download the OpenMeetings file:

```
wget http://apache.miloslavbrada.cz/openmeetings/4.0.0/bin/apache-openmeetings-4.0.0.zip
```

```
unzip apache-openmeetings-4.0.0.zip
```

...save the unloaded file to /opt:

```
mv apache-openmeetings-4.0.0.zip /opt
```

Download and install the file connector between OpenMeetings and MariaDB:

```
cd /opt
```

(Only one line without space between both)

```
wget http://repo1.maven.org/maven2/mysql/mysql-connector-java/5.1.42/mysql-connector-java-5.1.42.jar
```



...and copy it to where must be:

```
cp /opt/mysql-connector-java-5.1.42.jar /opt/red540/webapps/openmeetings/WEB-INF/lib
```

Now we are going to configure OpenMeetings for our database in MariaDB:

```
nano /opt/red540/webapps/openmeetings/WEB-INF/classes/META-INF/mysql_persistence.xml
```

**Modify in line 72:**

```
, Url=jdbc:mysql://localhost:3306/openmeetings?
```

...to

```
, Url=jdbc:mysql://localhost:3306/open40?
```

...it is the name of the database that we did initially.

Logically if initially you choose another name for the database, you will type it here.

Push **Ctrl+x**, **Y** and **Enter** in the keyboard, to save and leave nano.

We protect the access to the file:

(Only one line without space between both)

```
chmod 640 /opt/red540/webapps/openmeetings/WEB-INF/classes/META-INF/mysql_persistence.xml
```

**10)**

**----- Script to launch red5-OpenMeetings -----**

Please, download the red5 run script:

```
cd /opt
```

```
wget https://cwiki.apache.org/confluence/download/attachments/27838216/red5-2
```

...copy it to:

```
cp red5-2 /etc/init.d/
```

...concede permission of execution:

```
chmod +x /etc/init.d/red5-2
```

If you made the installation in any other path, please, edit the script and modify the line:

```
RED5_HOME=/opt/red540
```

...to

```
RED5_HOME=/your-path-installation
```

11)

----- Run red5-OpenMeetings -----

Restart MariaDB (be connected to Internet):

```
systemctl restart mysql.service
```

...and run red5-OpenMeetings. Please, in a new terminal and connected to Internet:

```
/etc/init.d/red5-2 start
```

...wait till, at the last, show this text: “**CleanupJob.cleanRoomFiles**”. After this, please, go to:

<http://localhost:5080/openmeetings/install>

...there will appear a page similar to this one:

OpenMeetings

1. Enabling import of PDFs into whiteboard


- Install **GhostScript** on the server, you can get more information on <http://pages.cs.wisc.edu/~ghost/> regarding installation. The instructions for installation can be found there, however on most linux systems you can get it via your favorite package managers (apt-get it).


If you have further questions or need support in installation or hosting:

**Community-Support:**  
[Mailing lists](#)

**Commercial-Support:**  
[Commercial-Support](#)

< > >> Finish

...press on  (bottom), and will show the default configuration with Derby, but we employ MySQL (MariaDB):

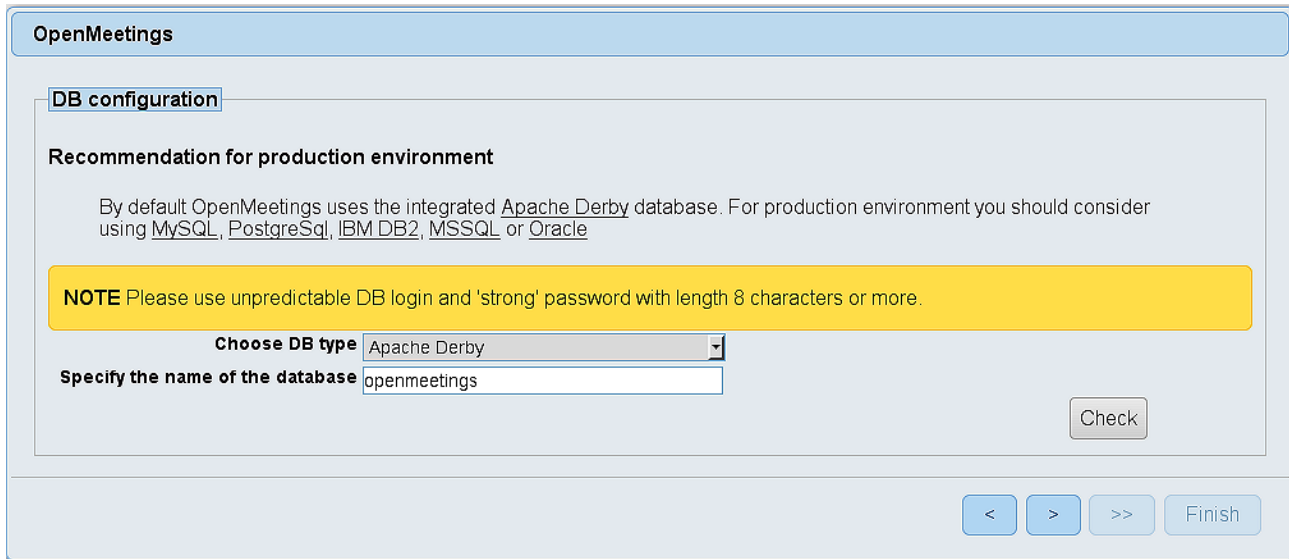

**OpenMeetings**

**DB configuration**

**Recommendation for production environment**

By default OpenMeetings uses the integrated Apache Derby database. For production environment you should consider using MySQL, PostgreSql, IBM DB2, MSSQL or Oracle

**NOTE** Please use unpredictable DB login and 'strong' password with length 8 characters or more.


**Choose DB type** Apache Derby

**Specify the name of the database** openmeetings

Check

< > >> Finish

...so, scroll and **Choose DB type** to MySQL:

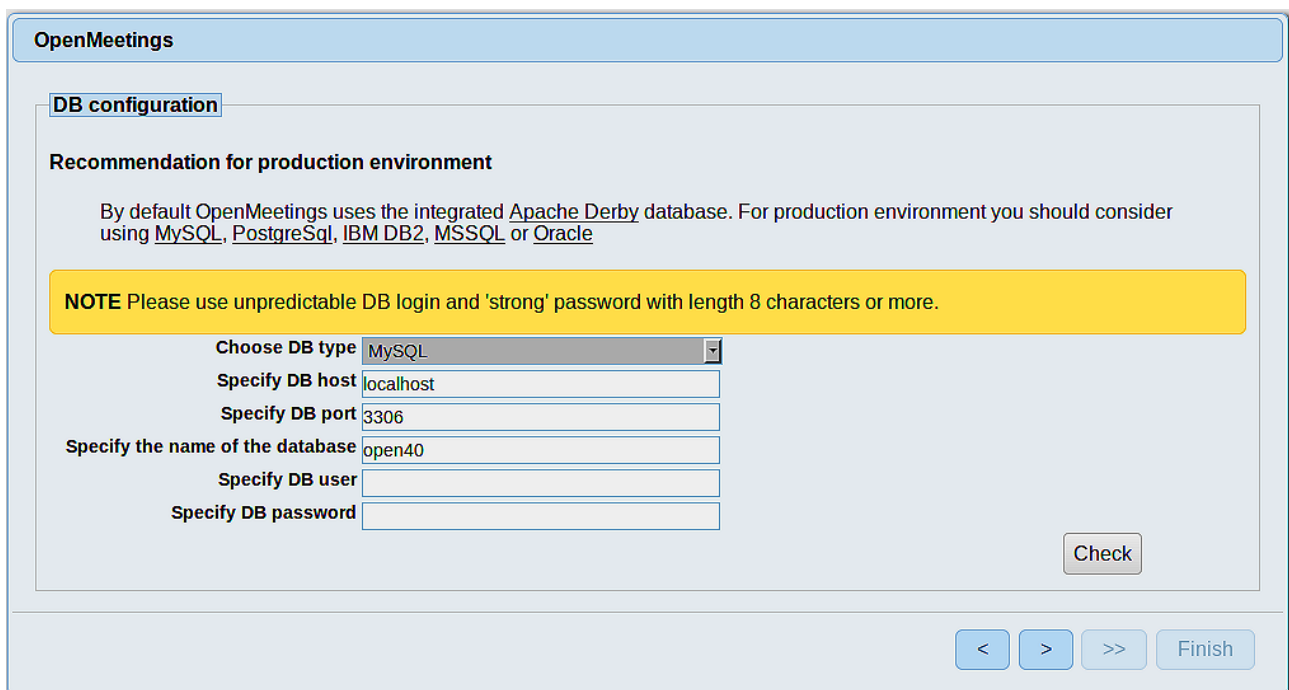

**OpenMeetings**

**DB configuration**

**Recommendation for production environment**

By default OpenMeetings uses the integrated Apache Derby database. For production environment you should consider using MySQL, PostgreSql, IBM DB2, MSSQL or Oracle

**NOTE** Please use unpredictable DB login and 'strong' password with length 8 characters or more.

**Choose DB type** MySQL

**Specify DB host** localhost

**Specify DB port** 3306

**Specify the name of the database** open40

**Specify DB user**

**Specify DB password**

Check

< > >> Finish


...and will show the database configuration we made in step 9.  
If you've choose any other different name for this, will show equally.


Now we must introduce the user name we did for our data base, at the step 8, and his password:

**Specify DB user** = **hola**

**Specify DB password** = **1a2B3c4D**

...if you choose any other data, here is where to type it.

Please, press  button, and will go to:

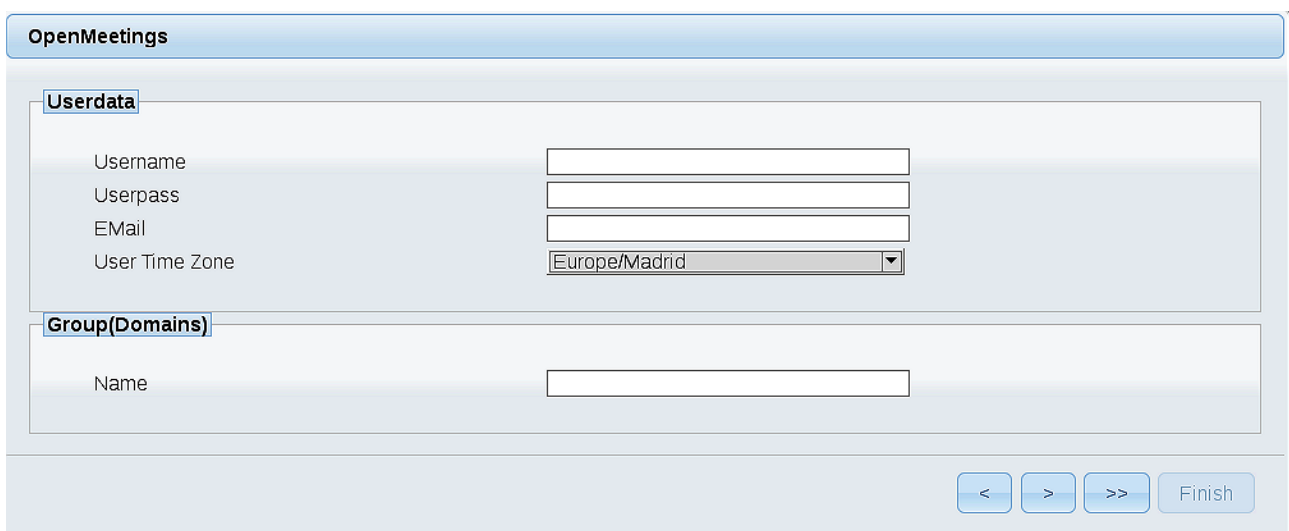

Here, we must introduce a user name for OpenMeetings, and his password. This must have 8 digits minimum, and at least 1 special symbol like: + ( % # ! ...etc.


**Username** = a-name ...this user will be administrator.

**Userpass** = a-password ...for the previous user.

**Email** = email-adress ...of the previous user.

**User Time Zone** = country where is this server.

**Name** = example-openmeetings ...group name to choose.

Press the button  and will lead us to a new page (below) where you can select the language for your OpenMeetings server, as well as other options such as the configuration of the mail server being used to send invitations or meetings from OpenMeetings:

**OpenMeetings**

**Configuration**

Allow self-registering	<input checked="" type="checkbox"/>
Send Email to new registered Users	<input type="checkbox"/>
New Users need to verify their EMail	<input type="checkbox"/>
Default DB objects of all types will be created (including Rooms, OAuth2 servers etc.)	<input checked="" type="checkbox"/>
Mail-Referer	<input type="text" value="noreply@openmeetings.apache.org"/>
SMTP-Server	<input type="text" value="localhost"/>
SMTP-Server Port(default SmtP-Server Port is 25)	<input type="text" value="25"/>
SMTP-Username	<input type="text"/>
SMTP-Userpass	<input type="password"/>
Enable TLS in Mail Server Auth	<input type="checkbox"/>
Set inviter's email address as ReplyTo in email invitations	<input checked="" type="checkbox"/>
Default Language	<input type="text" value="inglés"/>

A valid example to configure the mail server with Gmail, is as follows:  
(replace **john@gmail.com** with your real Gmail account)


<b>Mail-Refer</b>	==	<a href="#">john@gmail.com</a>
<b>SMTP-Server</b>	==	<a href="#">smtp.gmail.com</a>
<b>SMTP-Server Port (default SmtP-Server Port is 25)</b>	==	<a href="#">587</a>
<b>SMTP-Username</b>	==	<a href="#">john@gmail.com</a>
<b>SMTP-Userpass</b>	==	<a href="#">password of john@gmail.com</a>
<b>Enable TLS in Mail Server Auth</b>	==	<a href="#">...turn green the button to activate</a>

To select the language of your server OpenMeetings, please scroll on the line:

**Default Language** == [...select your language](#)

...the rest you can change it as you like.

Now press the button  and a new page will appear:

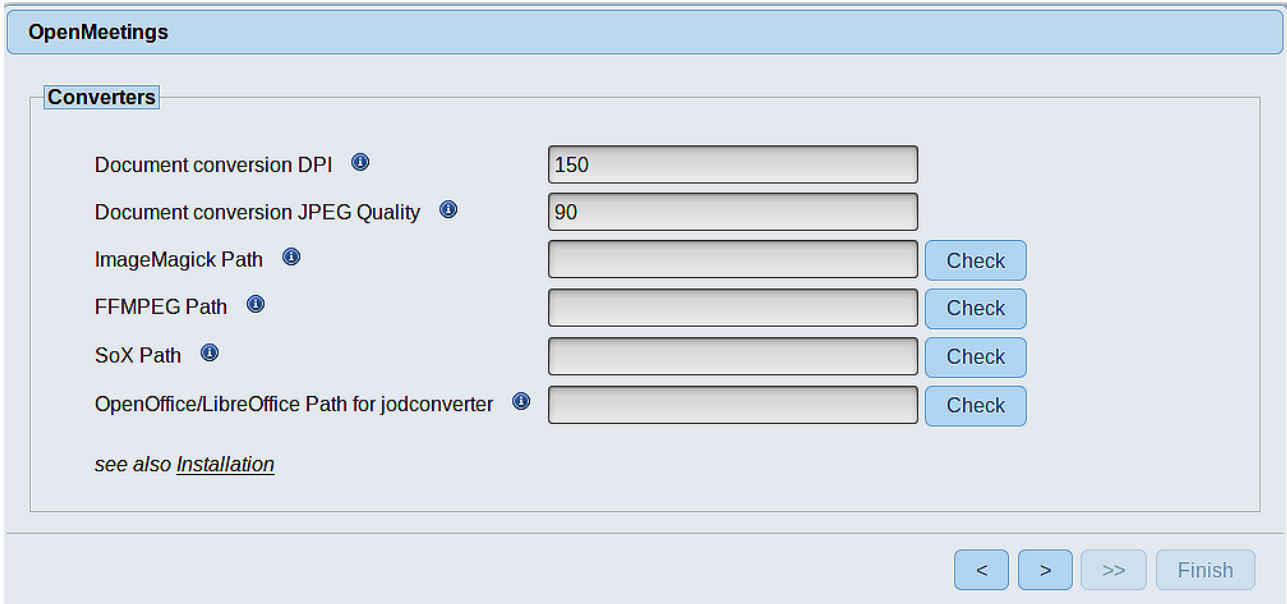

**OpenMeetings**

**Converters**

Document conversion DPI ⓘ

Document conversion JPEG Quality ⓘ

ImageMagick Path ⓘ

FFMPEG Path ⓘ

SoX Path ⓘ

OpenOffice/LibreOffice Path for jodconverter ⓘ

see also [Installation](#)

< > >> Finish

Here we'll introduce the respective paths for the image, video, audio and conversion of uploaded files:


**ImageMagick Path (Path)** == `/usr/bin`


**FFMPEG Path (Path)** == `/usr/local/bin`

**SOX Path (Path)** == `/usr/local/bin`

**OpenOffice/LibreOffice Path (Path) for jodconverter** == `/usr/lib/libreoffice`

As you go introducing paths, you can check if they are correct by pressing the button labeled **Check**. If it does not display any error message, that is OK.

Once completed the paths, please click the  button and move on to another page that would be to activate the SIP. We will leave it as is, unless you want to activate it knowing what it does:

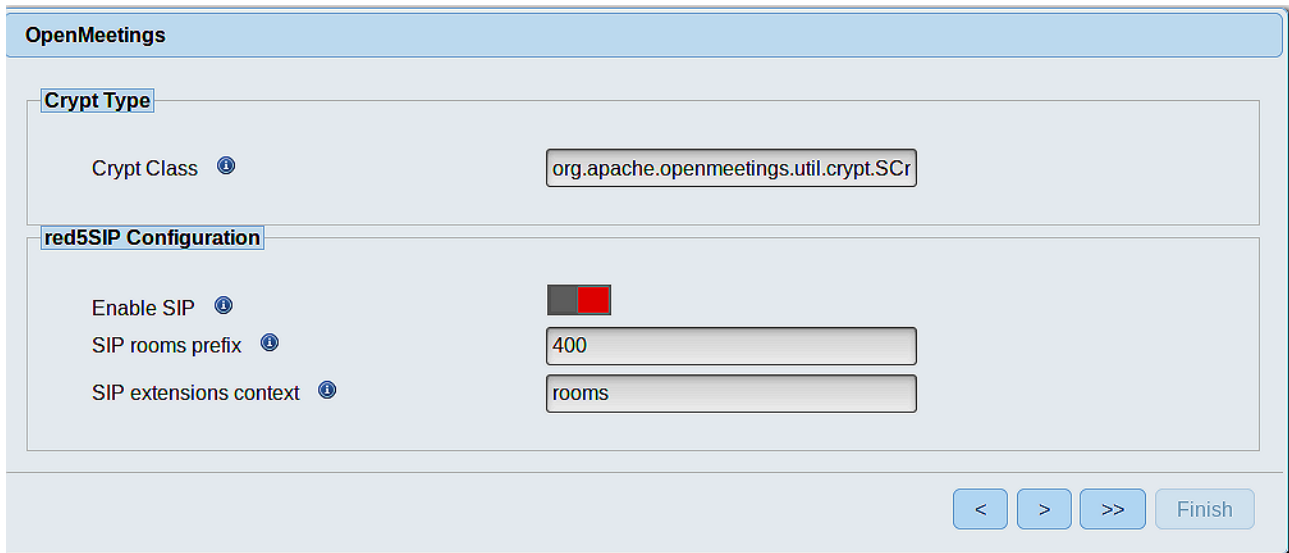

The screenshot shows the 'OpenMeetings' configuration window. It has two main sections:

- Crypt Type:** Contains a 'Crypt Class' field with the value 'org.apache.openmeetings.util.crypt.SCr'.
- red5SIP Configuration:** Contains three fields:
  - 'Enable SIP' with a red toggle switch.
  - 'SIP rooms prefix' with the value '400'.
  - 'SIP extensions context' with the value 'rooms'.

At the bottom right, there are navigation buttons: '<', '>', '>>', and 'Finish'.

Now press the button  Will show this window:



The screenshot shows the 'OpenMeetings' window with a message: 'Please click "Finish" button to start installation!'. Below the message is a large empty text input field. At the bottom right, there are navigation buttons: '<', '>', '>>', and 'Finish'.

Press **Finish** button...wait a seconds until the tables are fill in the database.

When has concluded, this another page will appear. **Don't** clic on [Enter the Application](#). First is need it restart the server. Please, open a new terminal and restart red5, connected to Internet:

`/etc/init.d/red5-2 restart`

**OpenMeetings**

[Enter the Application](#)

**Database was changed, please restart application to avoid possible issues**

If your Red5-Server runs on a different Port or on a different domain  
alter the config values of the client

**Mailing list**  
<http://openmeetings.apache.org/mail-lists.html>

**There are some companies that also offer commercial support for Apache OpenMeetings:**  
<http://openmeetings.apache.org/commercial-support.html>

< > >> Finish

Now yes, you can clic on [Enter the Application](#), or go with your browser to:

<http://localhost:5080/openmeetings>

...and will take us to the entry of OpenMeetings:

**Login**

Username or mail address

Password

Remember login

[Forgotten your password?](#) [Network testing](#)

Introduce the user's name and the password that you have chosen during the installation, push **Sign in** button and...



...**Congratulations!**

The next time that you like to accede OpenMeetings, would be:

<http://localhost:5080/openmeetings>

Remember to open in the server, the two following ports:

**1935 5080**


...in order that it could accede to OpenMeetings from other machines in Lan or Internet.

12)

----- **OpenMeetings's configuration** -----

Once you acced to OpenMeetings, if you would like to do any modification in the configuration, please go to:

**Administration → Configuration**

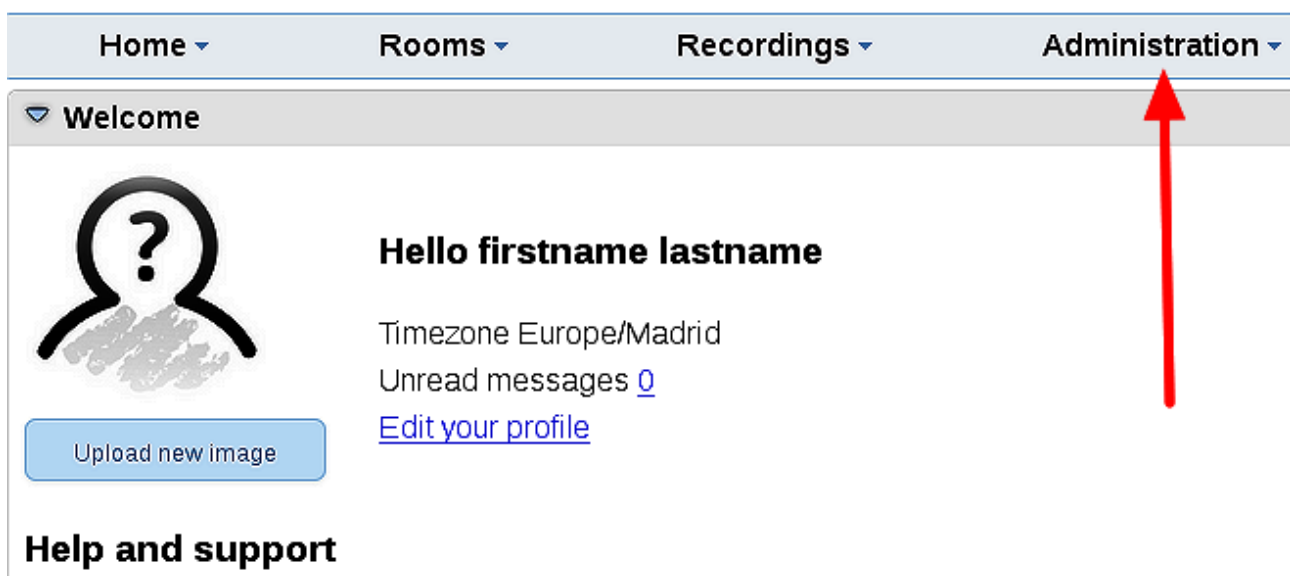

...and following the order of the red arrows:

Home ▾ Rooms ▾ Recordings ▾ Administration ▾

50 [Navigation icons] [Search]

ID	Key	Value
1	crypt.class.name	org.apache.openmeetings.util.crypt.SCryptImplementation
2	allow.frontend.register	true
3	allow.soap.register	true
4	allow.oauth.register	true
5	default.group.id	1
6	mail.smtp.server	localhost
7	mail.smtp.port	25
8	mail.smtp.system.email	noreply@openmeetings.apache.org
9	mail.smtp.user	
10	mail.smtp.pass	
11	mail.smtp.starttls.enable	false
12	mail.smtp.connection.timeout	30000
13	mail.smtp.timeout	30000
14	application.name	OpenMeetings
15	default.lang.id	8
16	document.dpi	150
17	document.quality	90
18	path.imagemagick	
19	path.sox	
20	path.ffmpeg	
21	path.office	
22	dashboard.rss.feed1	http://mail-archives.apache.org/mod_mbox/openmeetings-user/?format=atom
23	dashboard.rss.feed2	http://mail-archives.apache.org/mod_mbox/openmeetings-dev/?format=atom
24	send.email.at.register	false
25	send.email.with.verification	false

**Configuration**

Type: string

Key: path.ffmpeg

Value:

Last update: Oct 17, 2017 5:54:57 PM


Updated by: toro

Comment: Path To FFMPEG

1 → 20 (path.ffmpeg)      2 → Value field      3 → Configuration panel

Chat

And this is all.



If you have some doubt or question, please raise it in the Apache OpenMeetings forums:

<http://openmeetings.apache.org/mail-lists.html>



Thank you.

Alvaro Bustos