



Installation of Apache OpenMeetings 4.0.11 on MX Linux 19

This tutorial is made based on a fresh installations of

MX-19_x64.iso

It is tested with positive result. We will use the Apache's binary version OpenMeetings 4.0.11 stable, that is to say will suppress his compilation. It is done step by step.

Starting...

1)

We update and upgrade the OS:

```
sudo apt update
```

```
sudo apt upgrade
```

2)

----- **Installation of Java** -----

OpenMeetings **4.0.11** need Java to work. So, we install OpenJava 11:

```
sudo apt install openjdk-11-jdk openjdk-11-jdk-headless
```

...and his plugin for web:

```
sudo apt install icedtea-netx
```

Now, please, select OpenJava 11, if you have more than one java versions installed:

```
sudo update-alternatives --config java
```

To see the active java version:

```
java -version
```

3)

----- Installation of LibreOffice -----

LibreOffice is need it to convert to pdf the uploaded office files.

The MX Linux desktop iso have already LibreOffice installed.

We do it also for server iso:

```
sudo apt install libreoffice
```

4)

----- Installation ImageMagick and Sox -----

ImageMagic, will work the image files, png, jpg, gif, etc. Will install it and some more libraries and paquets:

```
sudo apt install -y imagemagick libjpeg62 zlib1g-dev unzip wget nmap
```

Sox, work the sound. We install it:

```
sudo apt install sox
```

5)

----- Installation of Adobe Flash Player -----

OpenMeetings 4.0.11 need Adobe Flash Player for cam and audio. We install it:

```
sudo apt install adobe-flashplugin
```

6)

----- Installation of FFmpeg -----

FFmpeg will work with video. We install it:

(Only one line with space between each one of them)

```
sudo apt -y --force-yes install ffmpeg
```

7)

----- Installation and configuration of MariaDB data server -----

MariaDB is the data server. Will install it:

```
sudo apt install mariadb-server
```

Run MariaDB:

```
sudo /etc/init.d/mysql start
```

Now we give a root password to MariaDB. Please, replace **new-password** with your own:

```
sudo mysqladmin -u root password new-password
```

Make a database with his own user for OpenMeetings:

```
sudo mysql -u root -p
```

...will ask for the root password that you have just chosen, type it...

```
MariaDB [(none)]> CREATE DATABASE open4011 DEFAULT CHARACTER SET 'utf8';
```

With this command we has created a database called open4011.

Now we create an user on this database. User password must be of 8 digits minimum:

(Only one line with space between both)

```
MariaDB [(none)]> GRANT ALL PRIVILEGES ON open4011.* TO 'hola'@'localhost'  
IDENTIFIED BY '1a2B3c4D' WITH GRANT OPTION;
```

- * `open4011`is the database name.
- * `hola`is the user name for this database.
- * `1a2B3c4D` ..is the password for this user.

You can change the data...but remember it! Later we'll need it.
Now we exit MariaDB:

```
MariaDB [(none)]> quit
```

8)

----- Installation of OpenMeetings -----

We'll install OpenMeetings in `/opt/red54011`. All the following information will be based on this directory.

Make the folder:

```
sudo mkdir /opt/red54011
```

```
cd /opt/red54011
```

...and download the red5-OpenMeetings file:

(Only one line without space between both)

```
sudo wget https://downloads.apache.org/openmeetings/4.0.11/bin/apache-openmeetings-4.0.11.tar.gz
```

```
sudo tar xzvf apache-openmeetings-4.0.11.tar.gz
```

...save the unloaded file to `/opt`:

```
sudo mv apache-openmeetings-4.0.11.tar.gz /opt
```

Do to **nobody** owner of the whole OpenMeetings folder installation, by security:

```
sudo chown -R nobody /opt/red54011
```

Download and install the connector between OpenMeetings and MariaDB:

```
cd /opt
```

(Only one line without space between both)

```
sudo wget https://repo1.maven.org/maven2/mysql/mysql-connector-java/5.1.49/mysql-connector-  
java-5.1.49.jar
```

...and copy it to where must be:

```
sudo cp /opt/mysql-connector-java-5.1.49.jar /opt/red54011/webapps/openmeetings/WEB-INF/lib
```

9)

----- **Script to launch red5-OpenMeetings** -----

Please, download the red5 run script:

```
cd /opt
```

```
sudo wget https://cwiki.apache.org/confluence/download/attachments/27838216/red5-ubdeb2
```

...and copy it to:

```
sudo cp red5-ubdeb2 /etc/init.d/
```

...and concede permission of execution:

```
sudo chmod +x /etc/init.d/red5-ubdeb2
```

10)

----- **Run red5-OpenMeetings** -----

Start MariaDB, if still it is not:

```
sudo /etc/init.d/mysql start
```

...and now start red5-OpenMeetings. Please, be connected to Internet:

```
sudo /etc/init.d/red5-ubdeb2 start
```

...will appear two text lines in the shell:


```
start-stop-daemon: --start needs --exec or --startas  
Try 'start-stop-daemon --help' for more information.
```

...you do nothing. Don't worry, everything work right,

Wait 40 seconds at least, in order that red5 it is runing completely. And after this, can go to:

<http://localhost:5080/openmeetings>

...there will appear this page:

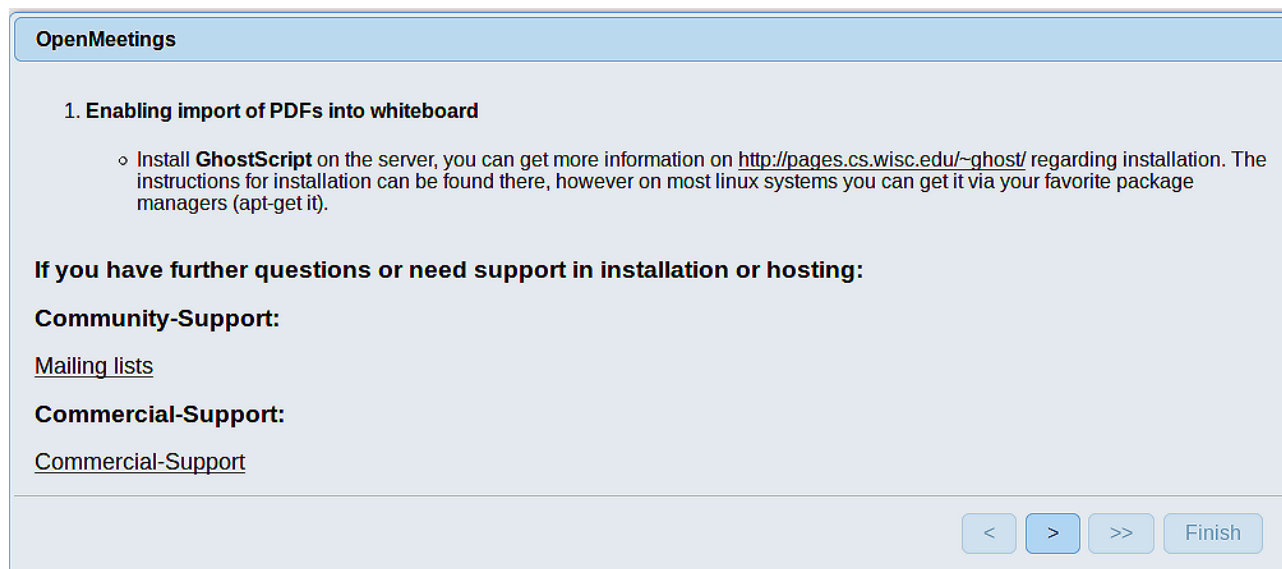

OpenMeetings

1. Enabling import of PDFs into whiteboard

- Install **GhostScript** on the server, you can get more information on <http://pages.cs.wisc.edu/~ghost/> regarding installation. The instructions for installation can be found there, however on most linux systems you can get it via your favorite package managers (apt-get it).

If you have further questions or need support in installation or hosting:


Community-Support:
[Mailing lists](#)

Commercial-Support:
[Commercial-Support](#)

< > >> Finish

...press on button (bottom), and will show the default database configuration

with Derby, but we employ MySQL (MariaDB),

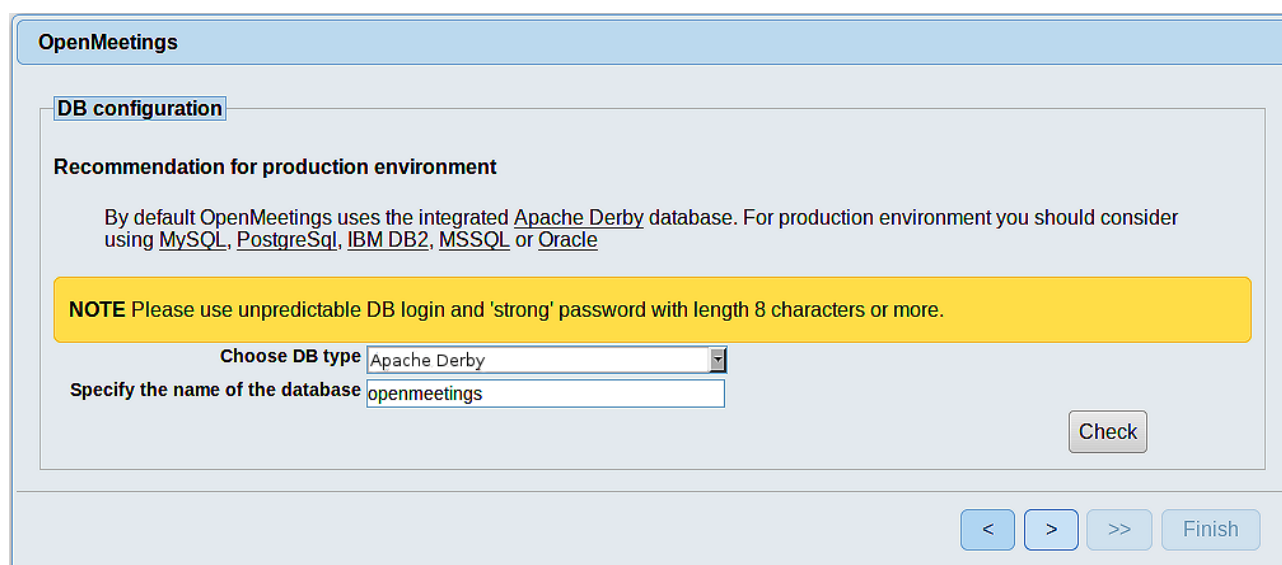

OpenMeetings

DB configuration

Recommendation for production environment

By default OpenMeetings uses the integrated [Apache Derby](#) database. For production environment you should consider using [MySQL](#), [PostgreSql](#), [IBM DB2](#), [MSSQL](#) or [Oracle](#)

NOTE Please use unpredictable DB login and 'strong' password with length 8 characters or more.

Choose DB type

Specify the name of the database

Check

< > >> Finish

...then, scroll and **Choose DB type** to MySQL

OpenMeetings

DB configuration

Recommendation for production environment

By default OpenMeetings uses the integrated Apache Derby database. For production environment you should consider using MySQL, PostgreSql, IBM DB2, MSSQL or Oracle

NOTE Please use unpredictable DB login and 'strong' password with length 8 characters or more.

Choose DB type	<input type="text" value="MySQL"/>
Specify DB host	<input type="text" value="localhost"/>
Specify DB port	<input type="text" value="3306"/>
Specify the name of the database	<input type="text" value="openmeetings"/>
Specify DB user	<input type="text"/>
Specify DB password	<input type="password"/>

Here we must introduce the database name, user name and his password we did at the step 7:

Specify the name of the database = open4011

Specify DB user = hola

Specify DB password = 1a2B3c4D

If you choosed a different data, please introduce it here.

Press button, and will go to:

OpenMeetings

Userdata

Username	<input type="text"/>
Userpass	<input type="password"/>
E-Mail	<input type="text"/>
User Time Zone	<input type="text" value="Europe/Madrid"/>

Group(Domains)

Name	<input type="text"/>
------	----------------------

Here, we must introduce a user name for OpenMeetings, and his password. This must have 8 digits minimum, and at least 1 special symbol like: + (% # ! ...etc.


Username = a-name ...this user will be administrator.

Userpass = password ...for the previous user.

Email = email-adress ...of the previous user.

User Time Zone = country where is this server.

Name = example-openmeetings ...group name to choose.

Press the button  and will lead us to a new page (below) where you can select the language for your OpenMeetings server, as well as other options such as the configuration of the mail server being used to send invitations or meetings from OpenMeetings:

OpenMeetings


Configuration


Allow self-registering	<input checked="" type="checkbox"/>
Send Email to new registered Users	<input type="checkbox"/>
New Users need to verify their EMail	<input type="checkbox"/>
Default DB objects of all types will be created (including Rooms, OAuth2 servers etc.)	<input checked="" type="checkbox"/>
Mail-Referer	<input type="text" value="noreply@openmeetings.apache.org"/>
SMTP-Server	<input type="text" value="localhost"/>
SMTP-Server Port(default SmtP-Server Port is 25)	<input type="text" value="25"/>
SMTP-Username	<input type="text"/>
SMTP-Userpass	<input type="text"/>
Enable TLS in Mail Server Auth	<input type="checkbox"/>
Set inviter's email address as ReplyTo in email invitations	<input checked="" type="checkbox"/>
Default Language	<input type="text" value="inglés"/>

A valid example to configure the mail server with Gmail, is as follows:
(replace **john@gmail.com** with your real Gmail account)

Mail-Refer	==	john@gmail.com
SMTP-Server	==	smtp.gmail.com
SMTP-Server Port (default SmtP-Server Port is 25)	==	587
SMTP-Username	==	john@gmail.com
SMTP-Userpass	==	password of john@gmail.com
Enable TLS in Mail Server Auth	==	...turn green the button to activate
Default Language	==	...select your language

...the rest you can change it as you like.

Now press the button  and a new page will appear:

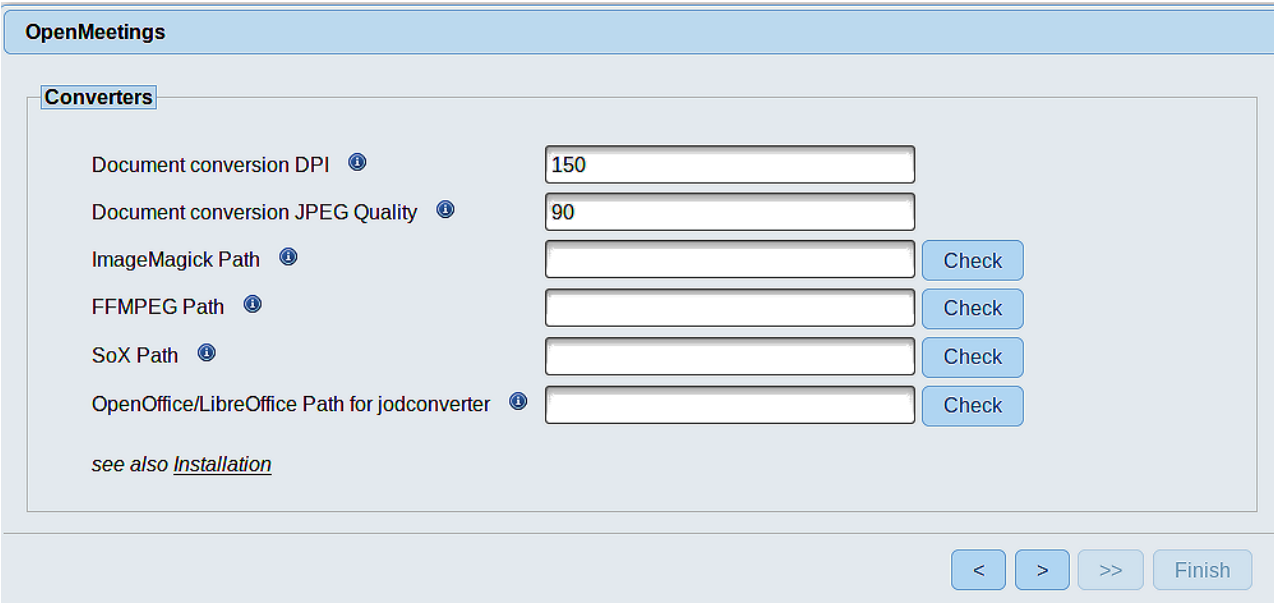

The screenshot shows the 'OpenMeetings' application window with the 'Converters' tab selected. The configuration page includes several input fields and buttons:

- Document conversion DPI: 150
- Document conversion JPEG Quality: 90
- ImageMagick Path: [Empty field] [Check]
- FFMPEG Path: [Empty field] [Check]
- SoX Path: [Empty field] [Check]
- OpenOffice/LibreOffice Path for jodconverter: [Empty field] [Check]

Below the input fields, there is a link: *see also [Installation](#)*

At the bottom right, there are navigation buttons: <, >, >>, and Finish.

Here we'll introduce the respective paths for the image, video, audio and conversion of uploaded files:


ImageMagick Path == /usr/bin


FFMPEG Path == /usr/bin

SOX Path == /usr/bin

**OpenOffice/LibreOffice Path for
jodconverter** == /usr/lib/libreoffice (32bit - 64bit)

As you go introducing paths, you can check if they are correct by pressing the button labeled **Check**. If it does not display any error message, that is OK.

Once completed the paths, please click the button  and move on to another page that would be to activate the SIP. We will leave it as is, unless you want to activate it knowing what it does:

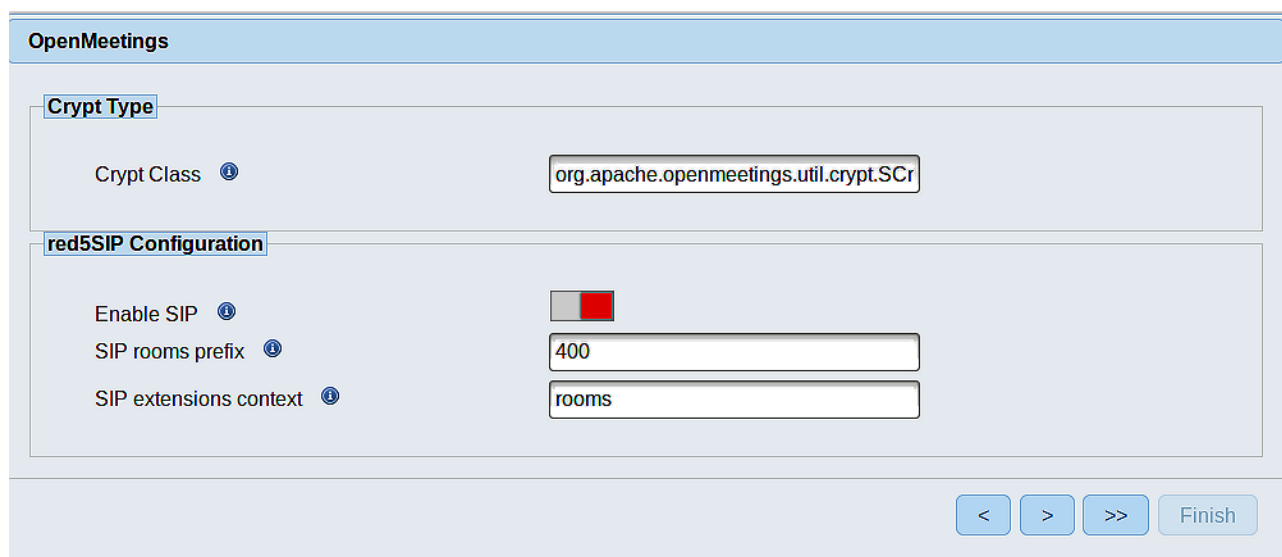


The screenshot shows the 'OpenMeetings' configuration window. It has a title bar 'OpenMeetings' and a light blue header. Below the header, there are two main sections:

- Crypt Type**: A sub-section with a title bar. It contains a 'Crypt Class' label with an information icon and a text input field containing 'org.apache.openmeetings.util.crypt.SCr'.
- red5SIP Configuration**: A sub-section with a title bar. It contains:
 - 'Enable SIP' with a checked checkbox and an information icon.
 - 'SIP rooms prefix' with a text input field containing '400' and an information icon.
 - 'SIP extensions context' with a text input field containing 'rooms' and an information icon.

At the bottom right of the window, there are four buttons: '<', '>', '>>', and 'Finish'.

Now push the button  and will show this window:

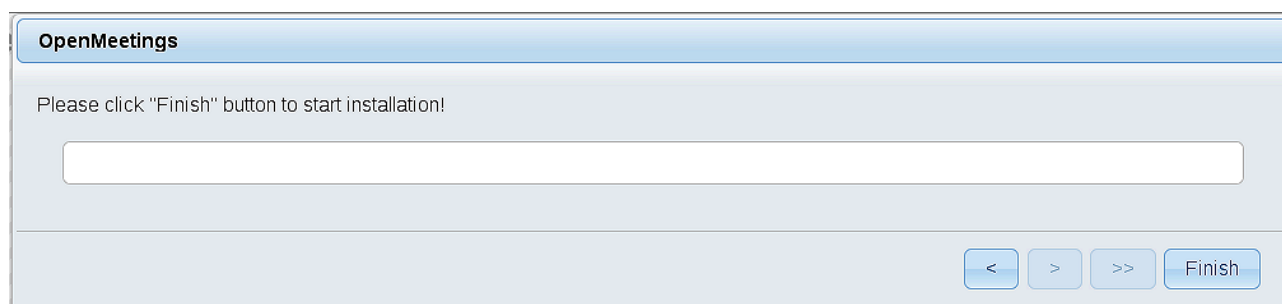

The screenshot shows the 'OpenMeetings' configuration window after clicking the next button. The title bar is 'OpenMeetings' and the header is light blue. The main content area contains the text 'Please click "Finish" button to start installation!' above a large empty text input field. At the bottom right, there are four buttons: '<', '>', '>>', and 'Finish'.

Press **Finish** button ...wait a seconds untill the tables are fill in the database.
When has concluded, this another page will appear. **Don't** clic on [Enter the Application](#).
First is need it to restart the server. Please, be connected to Internet:

```
sudo /etc/init.d/red5-ubdeb2 restart
```

OpenMeetings

[Enter the Application](#)

Database was changed, please restart application to avoid possible issues

If your Red5-Server runs on a different Port or on a different domain
alter the config values of the client

Mailing list
<http://openmeetings.apache.org/mail-lists.html>

There are some companies that also offer commercial support for Apache OpenMeetings:
<http://openmeetings.apache.org/commercial-support.html>

< > >> Finish

Now yes, you can clic on [Enter the Application](#), or go with your browser to:

<http://localhost:5080/openmeetings>

...and will take us to the entry of OpenMeetings:

Login

Username or mail address

Password

Remember login

[Forgotten your password?](#) [Network testing](#)

Not a member? Sign in

Introduce the user's name and the password that you have chosen during the installation, push **Sign in** button, and...

...**Congratulations!**

The next time that you like accede to OpenMeetings would be:

<http://localhost:5080/openmeetings>

Remember to open in the server the two following ports:

1935 5080


...in order that it could accede to OpenMeetings from other machines in LAN or Internet.

11)

----- **OpenMeetings's Configuration** -----

Once you acced to OpenMeetings, if you would like to do any modification in the configuration, please go to:

Administration → Configuration

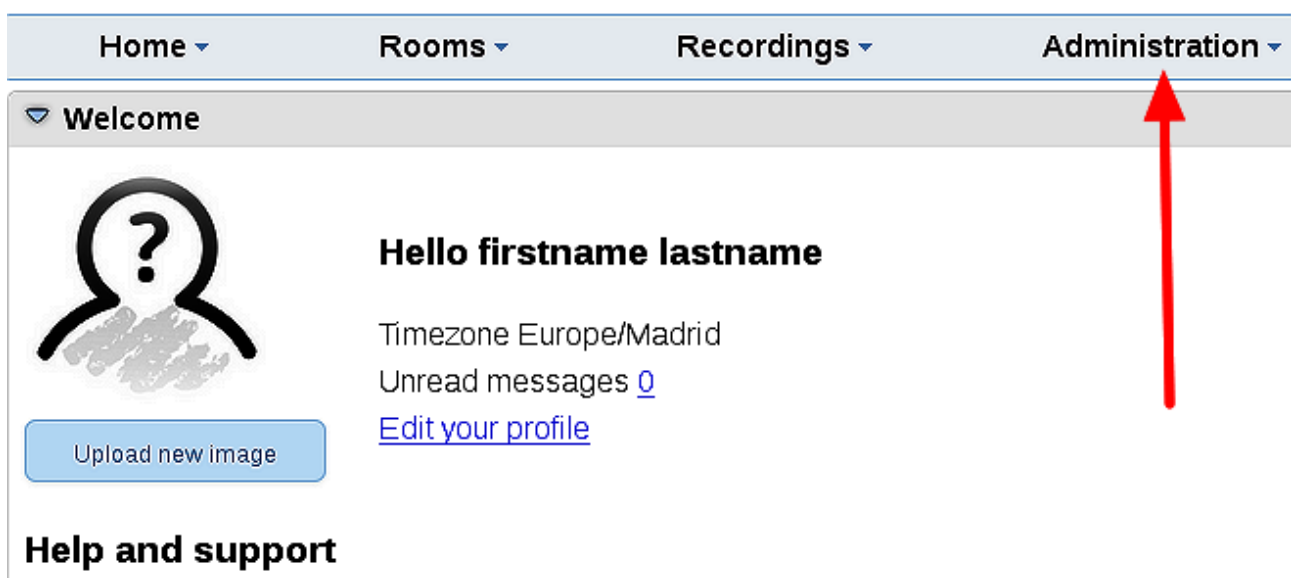

The screenshot shows the OpenMeetings user interface. At the top, there is a navigation bar with four items: "Home", "Rooms", "Recordings", and "Administration". The "Administration" item is highlighted with a red arrow pointing upwards. Below the navigation bar, there is a "Welcome" section with a user profile icon (a question mark inside a circle) and the text "Hello firstname lastname". To the right of the profile icon, there is a button labeled "Upload new image". Below the profile icon, there is a section titled "Help and support".

...and following the order of the red arrows:

Home ▾ Rooms ▾ Recordings ▾ Administration ▾

50 [Navigation icons] [Search]

ID	Key	Value
1	crypt.class.name	org.apache.openmeetings.util.crypt.SCryptImplementation
2	allow.frontend.register	true
3	allow.soap.register	true
4	allow.oauth.register	true
5	default.group.id	1
6	mail.smtp.server	localhost
7	mail.smtp.port	25
8	mail.smtp.system.email	noreply@openmeetings.apache.org
9	mail.smtp.user	
10	mail.smtp.pass	
11	mail.smtp.starttls.enable	false
12	mail.smtp.connection.timeout	30000
13	mail.smtp.timeout	30000
14	application.name	OpenMeetings
15	default.lang.id	8
16	document.dpi	150
17	document.quality	90
18	path.imagemagick	
19	path.sox	
20	path.ffmpeg	
21	path.office	
22	dashboard.rss.feed1	http://mail-archives.apache.org/mod_mbox/openmeetings-user/?format=atom
23	dashboard.rss.feed2	http://mail-archives.apache.org/mod_mbox/openmeetings-dev/?format=atom
24	send.email.at.register	false
25	send.email.with.verification	false

Configuration

Type: string

Key: path.ffmpeg

Value:

Last update: Oct 17, 2017 5:54:57 PM

Updated by: toro

Comment: Path To FFMPEG

1 2 3

Chat

If you have some doubt or question, please raise it in the Apache OpenMeetings forums:

<http://openmeetings.apache.org/mailling-lists.html>



Also you can download if you like, a wallpaper of OpenMeetings for different devices such as:

PC, Mac, Smartphone, iPhone and Tablets. Here is the link to download:

[OpenMeetings Wallpaper Download](#)

A dvd live iso with OpenMeetings 4.0.11 on Ubuntu 18.04 lts and other OpenMeetings 5.0.0 on Ubuntu 18.04 lts, is at your disposal.

Can find them here:

[Live iso download](#)

Thank you.

Alvaro Bustos (PMC and Committer at Apache OpenMeetings).