



Installation of Apache OpenMeetings 4.0.2 on Arch Linux

This tutorial is based on a fresh installations of

arch-anywhere-2.2.9-x86_64.iso

Arch Anywhere, it is a pure Arch Linux, with the only difference that the installation it is graphical. That's all.

It is tested with positive result. We will use the Apache's binary version OpenMeetings 4.0.2 stable, that is to say will suppress his compilation. It is done step by step.

25-2-2018

Please, be connected to Internet during all the process to run any server.

Starting...

1)

----- Update Operative System -----

Open a terminal as root:

`su`

...will ask for root password, and we update the operative system:

`pacman -Syu`

2)

----- Installation of Oracle Java 1.9 -----

Java **1.8** or **1.9** it is necessary for OpenMeetings **4.0.2**. We'll install Oracle Java.

We'll install Packer. Packer is a wrapper for both Pacman and AUR. Packer reduce the complexity of manually compiling and installing the packages.

First, install the required dependencies:

```
pacman -S base-devel fakeroot jshon expac git wget
```

...when ask: **Enter a selection (default=all):** ...press **Enter**.

...will ask also: **Continue with the installation? [Y/n]** ...press **Enter**.

...and when finish, exit as root:

```
exit
```

Download the PKGBUILD script from AUR:

```
wget https://aur.archlinux.org/cgit/aur.git/plain/PKGBUILD?h=packer
```

...rename the unloaded file:

```
mv PKGBUILD\?h\=packer PKGBUILD
```

...we compile it:

```
makepkg
```

...and now install Packer:

```
sudo pacman -U packer-*.pkg.tar.xz
```

...will ask user password, and when ask:

Continue with the installation [Y/n] ...press **Enter**.

Now, being at home, and in the terminal as user, *not as root*, install Oracle Java:

```
packer jdk
```

...will show all the available java versions. Type the number of Oracle Java Development, according to your Arch Linux installation, 32 or 64bit.

In my case i type, at the end of the shell, the number 18:

```
guadal@ar:/home/guadal
Archivo  Editar  Ver  Buscar  Terminal  Ayuda
15 extra/visualvm 1.3.9-1
    Visual tool integrating several commandline JDK tools and lightweight
    profiling capabilities
16 community/java-atk-wrapper-openjdk7 0.33.3-1
    ATK wrapper for screen reader access to Java Swing applications - OpenJDK
7
17 community/java-atk-wrapper-openjdk8 0.33.3-1
    ATK wrapper for screen reader access to Java Swing applications - OpenJDK
6
18 aur/jdk 9.0.4-1 (778)
    Oracle Java Development Kit
19 aur/jdk7 7u80-1 (134)
    Oracle Java 7 Development Kit (public release - end of support)
20 aur/jdk6 6u45-6 (82)
    Oracle Java 6 Development Kit (public release - end of support)
21 aur/jdk-docs 9.0.4-1 (55)
    Documentation for Oracle Java Development Kit
22 aur/jdk8 8u162-1 (40)
    Oracle Java 8 Development Kit
23 aur/jdk-devel 10b42-1 (37)
    Oracle Java 10 Development Kit Snapshot
24 aur/jre8-openjdk-infinity 8.u152-1 (30)
    OpenJDK Java 8 full runtime environment with infinity patch applied
25 aur/jre8-openjdk-headless-infinity 8.u152-1 (30)
```

```
guadal@ar:/home/guadal
Archivo  Editar  Ver  Buscar  Terminal  Ayuda
    Documentation for Oracle Java 6 Development Kit
50 aur/jdk8-openj9-bin 8u152-b16-1 (3)
    Eclipse (former IBM) OpenJ9 with openjdk8
51 aur/jdk5 5u22-1 (3)
    Oracle Java 5 Development Kit (public release - end of support)
52 aur/bin32-jdk6 6u45-5 (3)
    Oracle Java 6 Development Kit (32-bit) (public release - end of support)
53 aur/zulu-jdk 8u144b01-1 (2)
    Zulu JVM built upon OpenJDK 8
54 aur/ldapjdk 4.19-1 (2)
    The Mozilla LDAP Java SDK
55 aur/bin32-jdk5 5u22-1 (2)
    Oracle Java 5 Development Kit (32-bit) (public release - end of support)
56 aur/jdk-dcevm 8u144-1 (1)
    Oracle Java Development Kit with DCEVM patches
57 aur/jdk7r1-j9-bin 7.1.4.15-1 (1)
    IBM® SDK, Java Technology Edition, Version 7 Release 1
58 aur/jdk7-j9-bin 7.0.10.15-1 (1)
    IBM® SDK, Java Technology Edition, Version 7
59 aur/java8-openjdk-hsdis 8.u112-1 (1)
    Disassembler for HotSpot
Type numbers to install. Separate each number with a space.
Numbers: 18
```

Once you've typed your selected number, push **Enter**. And when ask:

Proceed with installation? [Y/n] **y**

Edit jdk PKGBUILD with \$EDITOR? [Y/n] **n**

Edit jdk.install with \$EDITOR? [Y/n] **n**

...press **Enter** to the question that will do later.

3)

----- **Installation of LibreOffice** -----

OpenMeetings will need LibreOffice to convert to pdf the uploaded office files.

We install LibreOffice and Firefox (my Arch Linux installation have Mate desktop):

```
sudo pacman -S libreoffice firefox
```

...press **Enter** to any question.

4)

----- **Installation of necessary packages and libraries** -----

Will install packages and libraries that we'll need later:

(Only one line with space between both)

```
sudo pacman -S libjpeg ghostscript unzip gcc ncurses make zlib libtool bison bzip2 file-roller  
autoconf automake pkgconfig tomcat-native nmap curl freetype2 nano
```

5)

----- **Installation ImageMagick and Sox** -----

ImageMagick, will work with images files jpg, png, gif, etc. We install it:

```
sudo pacman -S imagemagick
```

Sox, work the sound. Install it:

```
sudo pacman -S sox
```

6)

----- Installation of Adobe Flash Player -----

OpenMeetings even need Adobe Flash Player for cam. We install it:

```
sudo pacman -S flashplugin
```

7)

----- Compilation of FFmpeg -----

FFmpeg work with video. Will install a libraries, paquets, and vlc to play the recordings that we'll make in OpenMeetings. Access as root to shell:

```
su ...will ask for root password
```

(Only one line with space between both)

```
pacman -S glibc faac faad2 gsm imlib2 vorbis-tools autoconf automake cmake gcc git libtool make  
mercurial nasm pkgconfig yasm vlc qt4
```

The ffmpeg compilation it is based on this url, updated file versions 25-2-2018:

<https://trac.ffmpeg.org/wiki/CompilationGuide/Centos>

I made a script that will download, compile and install ffmpeg. It is tested and works ok. The result of any recordings we do in OpenMeetings, will be in mp4 format.

When the compilation be finished, will appear a text announces it:

FFMPEG Compilation is Finished!

So, download the script:

```
cd /opt
```

```
wget https://cwiki.apache.org/confluence/download/attachments/27838216/ffmpeg-archlinux.sh
```

...concede execution permission to it:

```
chmod +x ffmpeg-archlinux.sh
```

...and run it (be connected to Internet):

`./ffmpeg-archlinux.sh`

The compilation will spend about 30 minutes.

All the compiled files will be installed in: `/usr/local/bin`

When be finished, please go to **step 8**).

8)

----- Installation of MariaDB data server -----

MariaDB is the data server. We install it: (continue as root in shell)

`pacman -S mariadb`

Initialize data directories (be connected to Internet):

`mysql_install_db --user=mysql --basedir=/usr --datadir=/var/lib/mysql`

...and run MariaDB:

`systemctl start mysqld`

Give a password to MariaDB root . Please, modify `new-password` by your own and remember it:

`mysqladmin -u root password new-password`

Access to MariaDB:

`mysql -u root -p`

...will ask for the password you does just now.

Make a database called `open402`, for OpenMeetings. User password must be of 8 digits minimum:

MariaDB [(none)]> `CREATE DATABASE open402 DEFAULT CHARACTER SET 'utf8';`

Now we create a user with all permission on this `open402` database:

(Only one line with space between both)

```
MariaDB [(none)]> GRANT ALL PRIVILEGES ON open402.* TO 'hola'@'localhost'
IDENTIFIED BY '1a2B3c4D' WITH GRANT OPTION;
```

```
* open402 ..... name of the database
* hola ..... user for that database
* 1a2B3c4D .....password of this user
```

You can change the data, but...remember it! Later we'll need it.
We leave MariaDB:

```
MariaDB [(none)]> quit
```

9)

----- Installation of OpenMeetings -----

We'll install OpenMeetings in /opt/red5402. All the following information will be based on this directory.

Call to our folder of installation red5402

Make that folder:

```
mkdir /opt/red5402
```

```
cd /opt/red5402
```

...and download the OpenMeetings file:

```
wget http://apache.miloslavbrada.cz/openmeetings/4.0.2/bin/apache-openmeetings-4.0.2.zip
```

```
unzip apache-openmeetings-4.0.2.zip
```

...save the unloaded file to /opt:

```
mv apache-openmeetings-4.0.2.zip /opt
```

Download and install the connector between OpenMeetings and MariaDB:

```
cd /opt
```

(Only one line without space between both)

```
wget http://repo1.maven.org/maven2/mysql/mysql-connector-java/5.1.45/mysql-connector-java-5.1.45.jar
```

...and copy it to where must be:

```
cp /opt/mysql-connector-java-5.1.45.jar /opt/red5402/webapps/openmeetings/WEB-INF/lib
```

10)

----- Script to launch red5-OpenMeetings -----

We make the folder /etc/init.d, where put the red5 run script:

```
mkdir /etc/init.d
```

Download the script to run red5-OpenMeetings:

```
cd /opt
```

```
wget https://cwiki.apache.org/confluence/download/attachments/27838216/red5-2
```

...copy it to where must be:

```
cp red5-2 /etc/init.d/
```

...concede execution permission:

```
chmod +x /etc/init.d/red5-2
```

If you would made the installation in any other different path to /opt/red5402, please edit the script and modify the line:

```
RED5_HOME=/opt/red5402
```

...to

```
RED5_HOME=/your-path-installation
```

11)

----- Run red5-OpenMeetings -----

Restart MariaDB:

```
systemctl restart mysqld
```

...and run red5-OpenMeetings. Please, open a new terminal as root, and be connected to Internet, so the running will be quick:

```
/etc/init.d/red5-2 start
```


...wait 30 or 40 seconds for running red5-OpenMeetings completely. Then, go with the browser to:

<http://localhost:5080/openmeetings/install>

...there will appear a page similar to this one:

OpenMeetings

1. Enabling import of PDFs into whiteboard


- Install **GhostScript** on the server, you can get more information on <http://pages.cs.wisc.edu/~ghost/> regarding installation. The instructions for installation can be found there, however on most linux systems you can get it via your favorite package managers (apt-get it).

If you have further questions or need support in installation or hosting:

Community-Support:
[Mailing lists](#)

Commercial-Support:
[Commercial-Support](#)

< > >> Finish

...push on  (bottom), and will show the default configuration with Derby, but we employ MySQL (MariaDB):

OpenMeetings

DB configuration

Recommendation for production environment

By default OpenMeetings uses the integrated [Apache Derby](#) database. For production environment you should consider using [MySQL](#), [PostgreSQL](#), [IBM DB2](#), [MSSQL](#) or [Oracle](#)

NOTE Please use unpredictable DB login and 'strong' password with length 8 characters or more.

Choose DB type

Specify the name of the database

Check

< > >> Finish

...so, scroll and **Choose DB type** to MySQL:

OpenMeetings

DB configuration

Recommendation for production environment

By default OpenMeetings uses the integrated Apache Derby database. For production environment you should consider using MySQL, PostgreSQL, IBM DB2, MSSQL or Oracle

NOTE Please use unpredictable DB login and 'strong' password with length 8 characters or more.

Choose DB type	<input type="text" value="MySQL"/>
Specify DB host	<input type="text" value="localhost"/>
Specify DB port	<input type="text" value="3306"/>
Specify the name of the database	<input type="text" value="openmeetings"/>
Specify DB user	<input type="text"/>
Specify DB password	<input type="password"/>

Now we must introduce the database name, user name and his password we did at the step 8:

Specify the name of the database = open402

Specify DB user = hola

Specify DB password = 1a2B3c4D

Press button, and will go to:

OpenMeetings

Userdata

Username	<input type="text"/>
Userpass	<input type="password"/>
E-Mail	<input type="text"/>
User Time Zone	<input type="text" value="Europe/Madrid"/>

Group(Domains)

Name	<input type="text"/>
------	----------------------

Here, we must introduce a user name for OpenMeetings, and his password. This must have 8 digits minimum, and at least 1 special symbol like: + (% # ! ...etc.


Username = a-name ...this user will be administrator.

Userpass = a-password ...for the previous user.

Email = email-adress ...of this previous user.

User Time Zone = country where is this server.

Name = example-openmeetings ...group name to choose.

Press the button  and will lead us to a new page (below) where you can select the language for your OpenMeetings server, as well as other options such as the configuration of the mail server being used to send invitations or meetings from OpenMeetings:

OpenMeetings

Configuration


Allow self-registering	<input checked="" type="checkbox"/>
Send Email to new registered Users	<input type="checkbox"/>
New Users need to verify their EMail	<input type="checkbox"/>
Default DB objects of all types will be created (including Rooms, OAuth2 servers etc.)	<input checked="" type="checkbox"/>
Mail-Referer	<input type="text" value="noreply@openmeetings.apache.org"/>
SMTP-Server	<input type="text" value="localhost"/>
SMTP-Server Port(default SmtP-Server Port is 25)	<input type="text" value="25"/>
SMTP-Username	<input type="text"/>
SMTP-Userpass	<input type="password"/>
Enable TLS in Mail Server Auth	<input type="checkbox"/>
Set inviter's email address as ReplyTo in email invitations	<input checked="" type="checkbox"/>
Default Language	<input type="text" value="inglés"/>

A valid example to configure the mail server with Gmail, is as follows:
(replace **john@gmail.com** with your real Gmail account)

Mail-Refer	==	john@gmail.com
SMTP-Server	==	smtp.gmail.com
SMTP-Server Port (default SmtP-Server Port is 25)	==	587
SMTP-Username	==	john@gmail.com
SMTP-Userpass	==	password of john@gmail.com
Enable TLS in Mail Server Auth	==	...turn green the button to activate
Default Language	==	...select your language

...the rest you can change it as you like.

Now press the button  and a new page will appear:

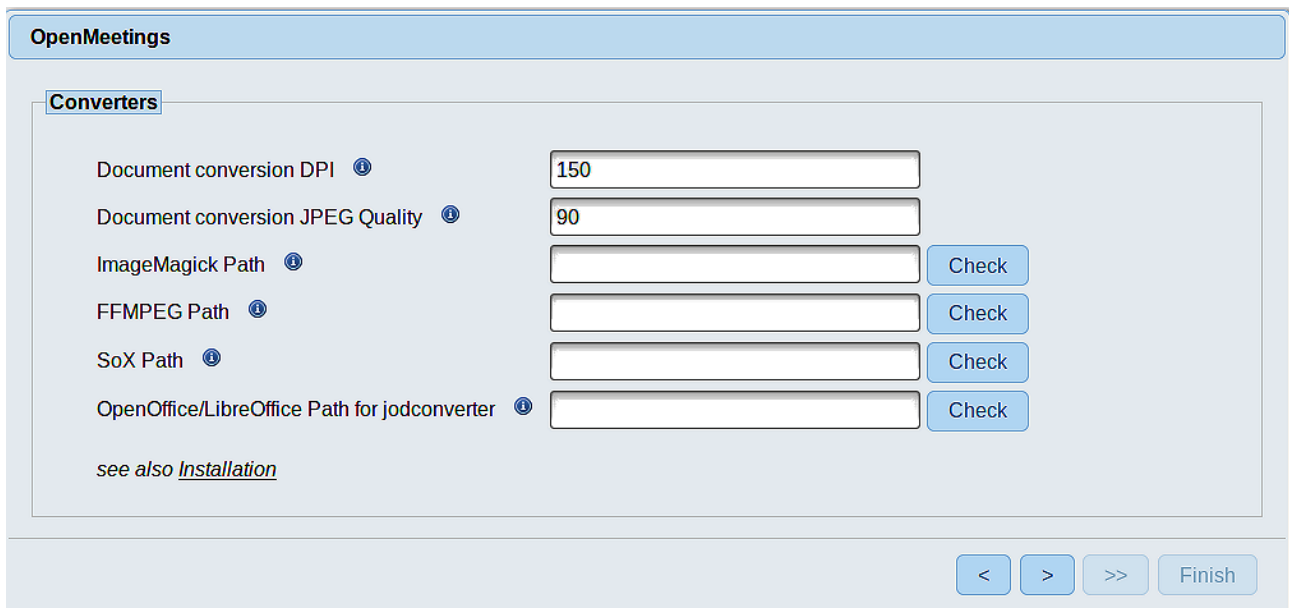

OpenMeetings

Converters

Document conversion DPI ⓘ

Document conversion JPEG Quality ⓘ

ImageMagick Path ⓘ

FFMPEG Path ⓘ


SoX Path ⓘ


OpenOffice/LibreOffice Path for jodconverter ⓘ

see also [Installation](#)

Here we'll introduce the respective paths for the image, video, audio and conversion of uploaded files:

ImageMagick Path	==	/usr/bin
FFMPEG Path	==	/usr/local/bin
SOX Path	==	/usr/bin
OpenOffice/LibreOffice Path for jodconverter	==	/usr/lib/libreoffice

Once completed the paths, please click the  button and move on to another page that would be to activate the SIP. We will leave it as is, unless you want to activate it knowing what it does:

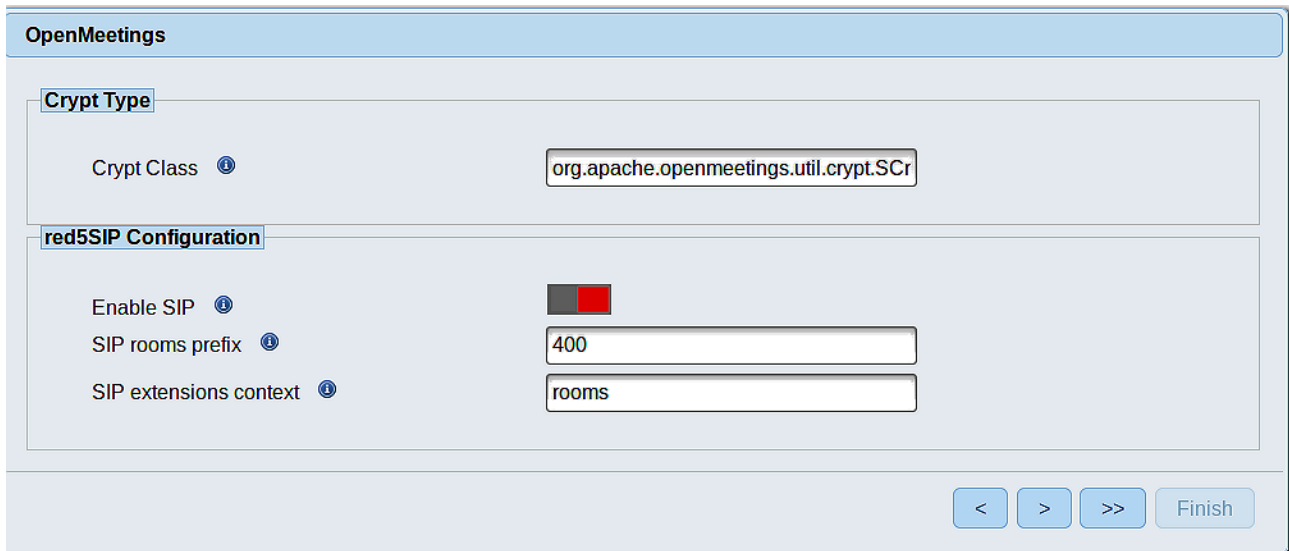

The screenshot shows the 'OpenMeetings' configuration window. It has a title bar 'OpenMeetings' and a light blue header. Below the header, there are two sections: 'Crypt Type' and 'red5SIP Configuration'. In the 'Crypt Type' section, there is a label 'Crypt Class' with a help icon and a text input field containing 'org.apache.openmeetings.util.crypt.SCr'. In the 'red5SIP Configuration' section, there are three items: 'Enable SIP' with a help icon and a red toggle switch, 'SIP rooms prefix' with a help icon and a text input field containing '400', and 'SIP extensions context' with a help icon and a text input field containing 'rooms'. At the bottom right of the window, there are four buttons: '<', '>', '>>', and 'Finish'.

Now, touch the button  Will show this window:



The screenshot shows the 'OpenMeetings' window after clicking the next button. The title bar is 'OpenMeetings'. The main content area contains the text 'Please click "Finish" button to start installation!' followed by a large empty text input field. At the bottom right, there are four buttons: '<', '>', '>>', and 'Finish'.

Press **Finish** button...wait a seconds untill the tables are fill in our database.

When is concluded, this another page will appear. **Don't** clic on [Enter the Application](#). First is need it to restart red5 server. Please, be connectd to Internet. Open a new terminal as root:

[/etc/init.d/red5-2 restart](#)

OpenMeetings

[Enter the Application](#)

Database was changed, please restart application to avoid possible issues

If your Red5-Server runs on a different Port or on a different domain
alter the config values of the client

Mailing list
<http://openmeetings.apache.org/mail-lists.html>

There are some companies that also offer commercial support for Apache OpenMeetings:
<http://openmeetings.apache.org/commercial-support.html>

< > >> Finish

Now yes, you can clic on [Enter the Application](#), or go with your browser to:

<http://localhost:5080/openmeetings>

...and will take us to the entry of OpenMeetings:

Login

Username or mail address

Password

Remember login

[Forgotten your password?](#) [Network testing](#)

Introduce the user's name and the password, that you have chosen during the installation, push **Sign in** button, and...

...**Congratulations!**

The next time that you like to accede OpenMeetings, would be:

<http://localhost:5080/openmeetings>

Remember to open in the server, the two following ports:

1935 5080


...in order that it could accede to OpenMeetings from other machines in Lan or Internet.

12)

----- **OpenMeetings's configuration** -----

Once you acced to OpenMeetings, if you would like to do any modification in the configuration, please go to:

Administration → Configuration

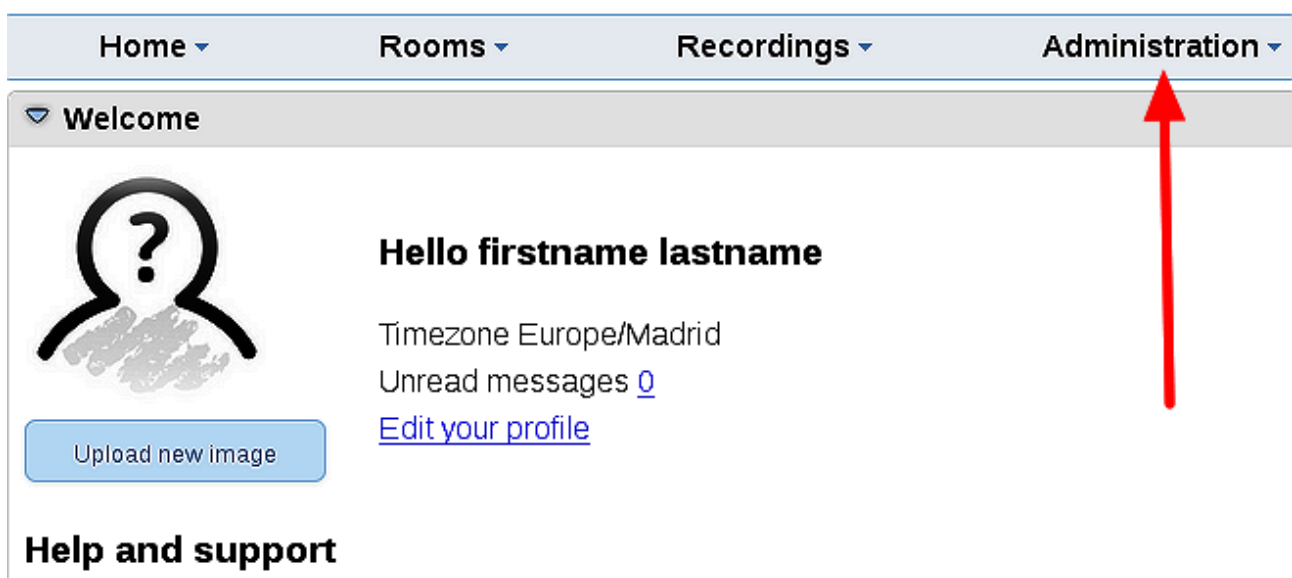

...and following the order of the red arrows:

Home ▾ Rooms ▾ Recordings ▾ Administration ▾

50 | Search

ID	Key	Value
1	crypt.class.name	org.apache.openmeetings.util.crypt.SCryptImplementation
2	allow.frontend.register	true
3	allow.soap.register	true
4	allow.oauth.register	true
5	default.group.id	1
6	mail.smtp.server	localhost
7	mail.smtp.port	25
8	mail.smtp.system.email	noreply@openmeetings.apache.org
9	mail.smtp.user	
10	mail.smtp.pass	
11	mail.smtp.starttls.enable	false
12	mail.smtp.connection.timeout	30000
13	mail.smtp.timeout	30000
14	application.name	OpenMeetings
15	default.lang.id	8
16	document.dpi	150
17	document.quality	90
18	path.imagemagick	
19	path.sox	
20	path.ffmpeg	
21	path.office	
22	dashboard.rss.feed1	http://mail-archives.apache.org/mod_mbox/openmeetings-user/?format=atom
23	dashboard.rss.feed2	http://mail-archives.apache.org/mod_mbox/openmeetings-dev/?format=atom
24	send.email.at.register	false
25	send.email.with.verification	false

Configuration

Type: string

Key: path.ffmpeg

Value:

Last update: Oct 17, 2017 5:54:57 PM

Updated by: toro

Comment: Path To FFMPEG

1 2 3

Chat

And this is all.



If you have some doubt or question, please raise it in the Apache OpenMeetings forums:

<http://openmeetings.apache.org/mail-lists.html>



Thank you.

Alvaro Bustos

