



Installation of Apache OpenMeetings 4.0.2 on Centos 7

This tutorial is made based on fresh installations of

CentOS-7-x86_64-LiveGNOME-1503.iso

It is tested with positive result. We will use the Apache's binary version OpenMeetings 4.0.2 stable, that is to say will suppress his compilation. It is done step by step.

25-2-2018

Please, be connected to Internet in all the process to run any server.

Starting...

1)

At first place we must modify Selinux level security for the installation:

```
yum install -y nano
```

```
sudo nano /etc/selinux/config
```

...modify:

```
SELINUX=enforcing
```

...to

```
SELINUX=permissive
```

2)

----- Update Operative System -----

Update operative system:

```
yum update -y
```

...and reboot, for kernel changes and the new Selinux configuration take effect:

```
reboot
```

3)

----- ADD Repos -----

```
yum install -y wget
```

EPEL:

```
wget http://epel.mirror.nucleus.be/7/x86\_64/Packages/e/epel-release-7-11.noarch.rpm
```

```
sudo rpm -Uvh epel-release-7*.rpm
```

Nux

(Only one line without space between both)

```
rpm -Uvh http://li.nux.ro/download/nux/dextop/el7/x86\_64/nux-dextop-release-0-5.el7.nux.noarch.rpm
```

```
## Adobe repo 64-bit x86_64 ## For Flash player.
```

```
rpm -ivh http://linuxdownload.adobe.com/adobe-release/adobe-release-x86_64-1.0-1.noarch.rpm
```

```
rpm --import /etc/pki/rpm-gpg/RPM-GPG-KEY-adobe-linux
```

```
yum update -y
```

4)

----- Installation of Oracle Java 1.8 -----

Java 1.8 is necessary for OpenMeetings 4.0.2. We install Oracle Java 1.8.

```
cd /opt
```

Download the file:

(All in one line only. 1^a and 2^a without space between them. A space to the 3^a. Together 3^a and 4^a)

```
wget --no-cookies --no-check-certificate --header "Cookie: gpw_e24=http%3A%2F%2Fwww.oracle.com%2F; oraclelicense=accept-securebackup-cookie" http://download.oracle.com/otn-pub/java/jdk/8u161-b12/2f38c3b165be4555a1fa6e98c45e0808/jdk-8u161-linux-x64.rpm
```

...and install it:

```
rpm -ivh jdk-8u161-linux-x64.rpm
```

Maybe you have installed various versions of Java. We select the just installed Oracle Java:

```
update-alternatives --config java
```

And to see if the selected version is active:

```
java -version
```

5)

----- Installation of LibreOffice -----

OpenMeetings will need LibreOffice to convert to pdf the uploaded office files. Install it.

Maybe it is installed, but for iso server:

```
yum -y install libreoffice libreoffice-headless
```

6)

----- Installation of necessary packages and libraries -----

Will install packages and libraries we'll need later:

(All in only one line. A space between 1^a and 2^a. Together 2^a and 3^a)

```
yum install -y libjpeg libjpeg-devel ghostscript freetype freetype-devel unzip gcc gcc-c++ ncurses
ncurses-devel make zlib zlib-devel libtool bison bison-devel openssl-devel bzip2 bzip2-devel file-
roller git autoconf automake pkgconfig tomcat-native nmap vlc
```

7)

----- Installation ImageMagick and Sox -----

ImageMagick, work the images files jpg, png, gif, etc. We install it and some libraries:

```
yum install -y ImageMagick giflib giflib-devel giflib-utils
```

Sox, work the sound. Will compile it:

```
cd /opt
```

```
wget http://sourceforge.net/projects/sox/files/sox/14.4.2/sox-14.4.2.tar.gz
```

```
tar xzvf sox-14.4.2.tar.gz
```

```
cd /opt/sox-14.4.2
```

```
./configure
```

```
make && make install
```

```
cd /opt
```

8)

----- Installation of Adobe Flash Player -----

OpenMeetings even need Adobe Flash Player for cam.

```
yum install -y flash-plugin
```

9)

----- Compilation of FFmpeg -----

FFmpeg work with video. Will install a paquets, libraries and vlc to play the recordings.

```
yum install -y glibc alsa-lib-devel faac faac-devel faad2 faad2-devel gsm gsm-devel imlib2 imlib2-  
devel lame-devel vorbis-tools theora-tools libvpx-devel vlc autoconf automake cmake freetype-  
devel gcc gcc-c++ git libtool make mercurial nasm pkgconfig zlib-devel curl
```

This ffmpeg compilation is based on this url, updated file versions 25-2-2018:

<https://trac.ffmpeg.org/wiki/CompilationGuide/Centos>

I made a script to compile and install ffmpeg on Centos. It is tested and is ok.
The result of any recording we do in OpenMeetings, will be in mp4 format.
During the x265 compilation, will look like stop for a minutes in a text that say: **43%**,
but not always. Don't worry, everything is going right. Be patient.

When is finished, will appear a text:

FFMPEG Compilation is Finished!

So, we download the script:

```
cd /opt
```

```
wget https://cwiki.apache.org/confluence/download/attachments/27838216/ffmpeg-centos2.sh
```

...concede execution permission to it:

```
chmod +x ffmpeg-centos2.sh
```

...and run it (be connected to Internet). The compilation will spend about 30 minutes:

```
./ffmpeg-centos2.sh
```

When finish, please, go to **step 10**).

But, if you prefer copy and paste, i **don't advise**, leave the commands script:

```
sudo nano /opt/ffmpeg-centos.sh
```

...copy the green text **from here**:

```
# Script ffmpeg compile for Centos 6.x and Centos 7.x
# Alvaro Bustos. Thanks to Hunter
# Updated 25-2-2018
# Install libraries
yum install -y autoconf automake bzip2 cmake freetype-devel gcc gcc-c++ git libtool make
mercurial pkgconfig zlib-devel x264-devel x265-devel

# Install yasm from repos
yum install -y yasm

# Create a temporary directory for sources.
SOURCES=$(mkdir ~/ffmpeg_sources)
cd ~/ffmpeg_sources

# Download the necessary sources.
curl -#LO ftp://ftp.videolan.org/pub/x264/snapshots/last_stable_x264.tar.bz2
hg clone https://bitbucket.org/multicoreware/x265
git clone --depth 1 git://git.code.sf.net/p/opencore-amr/fdk-aac
curl -L -O http://downloads.sourceforge.net/project/lame/lame/3.99/lame-3.99.5.tar.gz
wget https://sources.voidlinux.eu/opus-1.2.1/opus-1.2.1.tar.gz
wget http://downloads.xiph.org/releases/ogg/libogg-1.3.2.tar.gz
wget http://downloads.xiph.org/releases/vorbis/libvorbis-1.3.5.tar.gz
wget http://downloads.xiph.org/releases/theora/libtheora-1.1.1.tar.gz
git clone --depth 1 https://chromium.googlesource.com/webm/libvpx.git
# git clone --depth 1 git://source.ffmpeg.org/ffmpeg
wget http://ffmpeg.org/releases/ffmpeg-3.4.2.tar.gz

# Unpack files
for file in `ls ~/ffmpeg_sources/*.tar.*`; do
tar -xvf $file
done

cd x264-*/
./configure --prefix="$HOME/ffmpeg_build" --bindir="$HOME/bin" --enable-static && make &&
make install && make distclean; cd ..

cd x265/build/linux
cmake -G "Unix Makefiles" -DCMAKE_INSTALL_PREFIX="$HOME/ffmpeg_build"
-DENABLE_SHARED:bool=off ../../source && make && make install; cd ~/ffmpeg_sources

cd fdk-aac
autoreconf -fiv && ./configure --prefix="$HOME/ffmpeg_build" --disable-shared && make &&
make install && make distclean; cd ..

cd lame-*/
./configure --prefix="$HOME/ffmpeg_build" --bindir="$HOME/bin" --disable-shared --enable-
nasm && make && make install && make distclean; cd ..
```

```

cd opus-*/
autoreconf -fiv && ./configure --prefix="$HOME/ffmpeg_build" --disable-shared && make &&
make install && make distclean; cd ..

cd libogg-*/
./configure --prefix="$HOME/ffmpeg_build" --disable-shared && make && make install &&
make distclean; cd ..

cd libvorbis-*/
LDFLAGS="-L$HOME/ffmpeg_build/lib" CPPFLAGS="-I$HOME/ffmpeg_build/include"
./configure --prefix="$HOME/ffmpeg_build" --with-ogg="$HOME/ffmpeg_build" --disable-shared
&& make && make install && make distclean; cd ..

cd libtheora-*/
./configure --prefix="$HOME/ffmpeg_build" --with-ogg="$HOME/ffmpeg_build" --disable-
examples --disable-shared --disable-sdltest --disable-vorbistest && make && make install; cd ..

cd libvpx
./configure --prefix="$HOME/ffmpeg_build" --disable-examples && make && make install &&
make clean; cd ..

cd ffmpeg-*/
PKG_CONFIG_PATH="$HOME/ffmpeg_build/lib/pkgconfig" ./configure
--prefix="$HOME/ffmpeg_build" --extra-cflags="-I$HOME/ffmpeg_build/include" --extra-
ldflags="-L$HOME/ffmpeg_build/lib" --bindir="$HOME/bin" --pkg-config-flags="--static"
--enable-gpl --enable-nonfree --enable-libfdk_aac --enable-libfreetype --enable-libmp3lame
--enable-libopus --enable-libvorbis --enable-libvpx --enable-libx264 --enable-libx265 --enable-
libtheora && make && make install && make distclean && hash -r; cd ..

cd ~/bin
cp ffmpeg ffprobe ffserver lame x264 /usr/local/bin

cd ~/ffmpeg_build/bin
cp x265 /usr/local/bin

echo "FFMPEG Compilation is Finished!"

```

...to here.

Concede permission of execution:

```
chmod +x /opt/ffmpeg-centos.sh
```

```
cd /opt
```

Now be connected to Internet, run the script and wait some long minutes while the compilation:

```
./ffmpeg-centos.sh
```

Remember the warning about 8 minutes in a false stop...

All the compiled files will be installed in: /usr/local/bin

10)

----- Installation MariaDB data server -----

MariaDB is the database server.

We install it:

```
yum install -y mariadb-server
```

...and run mariadb:

```
systemctl start mariadb.service
```

Give a password to mariadb root . Please, modify **new-password** by your own.

```
mysqladmin -u root password new-password
```

Make a database for OpenMeetings. User password must be of 8 digits minimum:

```
mysql -u root -p
```

...will ask for the root password you does just now:

```
MariaDB [(none)]> CREATE DATABASE open402 DEFAULT CHARACTER SET 'utf8';
```

Now we create a user with all permission on this open402 database.

(Only one line with space between both)

```
MariaDB [(none)]> GRANT ALL PRIVILEGES ON open402.* TO 'hola'@'localhost'  
IDENTIFIED BY '1a2B3c4D' WITH GRANT OPTION;
```

- * **open402** name of the database
- * **hola** user for that database
- * **1a2B3c4D** password of that user

You can change the data...but remember it! Later we'll need it. Now we leave MariaDB:

```
MariaDB [(none)]> quit
```


11)

----- Installation of OpenMeetings -----

We'll install OpenMeetings in /opt/red5402. All the following information will be based on this directory.

Call to our folder of installation red5402

Make the folder:

```
mkdir /opt/red5402
```

```
cd /opt/red5402
```

...and download the OpenMeetings file:

```
wget http://apache.miloslavbrada.cz/openmeetings/4.0.2/bin/apache-openmeetings-4.0.2.zip
```

```
unzip apache-openmeetings-4.0.2.zip
```

...save the unloaded file to /opt:

```
mv apache-openmeetings-4.0.2.zip /opt
```

Download and install the connector between OpenMeetings and MariaDB:

```
cd /opt
```

(Only one line without space between both)

```
wget http://repo1.maven.org/maven2/mysql/mysql-connector-java/5.1.45/mysql-connector-java-5.1.45.jar
```

...and copy it to where must be:

```
cp /opt/mysql-connector-java-5.1.45.jar /opt/red5402/webapps/openmeetings/WEB-INF/lib
```

Now we are going to configure OpenMeetings for our database in MariaDB:

```
nano /opt/red5402/webapps/openmeetings/WEB-INF/classes/META-INF/mysql_persistence.xml
```

Modify in line 72:

```
, Url=jdbc:mysql://localhost:3306/openmeetings?
```

...to

```
, Url=jdbc:mysql://localhost:3306/open402?
```

...it is the name of the database that we did initially.

Logically if initially you choose another name and password for the database, you will to change them here.

Press **Ctrl+x**, will ask to save, press **Y** and to exit nano press **Enter**.

We protect the access to the file:

(Only one line without space between both)

```
chmod 6402 /opt/red5402/webapps/openmeetings/WEB-INF/classes/META-INF/mysql_persistence.xml
```

12)

----- Script to launch red5-OpenMeetings -----

We'll download the script to run red5-OpenMeetings:

```
cd /opt
```

```
wget https://cwiki.apache.org/confluence/download/attachments/27838216/red5-2
```

...copy it to where must be:

```
cp red5-2 /etc/init.d/
```

...concede execution permission:

```
chmod +x /etc/init.d/red5-2
```

If you made the installation in any other different path to /opt/red5402, please edit the script and modify the line:

```
RED5_HOME=/opt/red5402
```

...to

```
RED5_HOME=/your-path-installation
```

13)

----- Run red5-OpenMeetings -----

Restart MariaDB:

```
systemctl restart mariadb.service
```

...and run red5-OpenMeetings. Please, be connected to Internet:

[/etc/init.d/red5-2 start](#)

...wait until the text “**CleanupJob.cleanRoomFiles**”, it is the last in the shell. Then, go with the browser to:

<http://localhost:5080/openmeetings/install>

...there will appear a page similar to this one:

OpenMeetings

1. Enabling import of PDFs into whiteboard

- Install **GhostScript** on the server, you can get more information on <http://pages.cs.wisc.edu/~ghost/> regarding installation. The instructions for installation can be found there, however on most linux systems you can get it via your favorite package managers (apt-get it).

If you have further questions or need support in installation or hosting:

Community-Support:
[Mailing lists](#)

Commercial-Support:
[Commercial-Support](#)

< > >> Finish

...push on (bottom), and will show the default database configuration with Derby, but we employ MySQL (MariaDB):

OpenMeetings

DB configuration

Recommendation for production environment

By default OpenMeetings uses the integrated [Apache Derby](#) database. For production environment you should consider using [MySQL](#), [PostgreSQL](#), [IBM DB2](#), [MSSQL](#) or [Oracle](#)

NOTE Please use unpredictable DB login and 'strong' password with length 8 characters or more.

Choose DB type

Specify the name of the database

Check

< > >> Finish

...so, scroll and **Choose DB type** to MySQL:

OpenMeetings

DB configuration

Recommendation for production environment

By default OpenMeetings uses the integrated Apache Derby database. For production environment you should consider using MySQL, PostgreSQL, IBM DB2, MSSQL or Oracle

NOTE Please use unpredictable DB login and 'strong' password with length 8 characters or more.

Choose DB type	<input type="text" value="MYSQL"/>
Specify DB host	<input type="text" value="localhost"/>
Specify DB port	<input type="text" value="3306"/>
Specify the name of the database	<input type="text" value="open402"/>
Specify DB user	<input type="text"/>
Specify DB password	<input type="password"/>

...will show the database name we made in step 11.

If you've choose any other different name for this, will show equally.

Now we must introduce the user name we did for our database, at the step 8, and his password:

Specify DB user = hola

Specify DB password = 1a2B3c4D

Please, press button and will go to:

OpenMeetings

Userdata

Username	<input type="text"/>
Userpass	<input type="password"/>
E-Mail	<input type="text"/>
User Time Zone	<input type="text" value="Europe/Madrid"/>

Group(Domains)

Name	<input type="text"/>
------	----------------------

Here, we must introduce a user name for OpenMeetings, and his password. This must have 8 digits minimum, and at least 1 special symbol like: + (% # ! ...etc.


Username = a-name ...this user will be administrator.

Userpass = a-password ...for the previous user.

Email = email-adress ...of the previous user.

User Time Zone = country where is this server

Name = example-openmeetings ...group name to choose.

Press the button  and will lead us to a new page (below) where you can select the language for your OpenMeetings server, as well as other options such as the configuration of the mail server being used to send invitations or meetings from OpenMeetings:

OpenMeetings

Configuration

Allow self-registering	<input checked="" type="checkbox"/>
Send Email to new registered Users	<input type="checkbox"/>
New Users need to verify their EMail	<input type="checkbox"/>
Default DB objects of all types will be created (including Rooms, OAuth2 servers etc.)	<input checked="" type="checkbox"/>
Mail-Referer	<input type="text" value="noreply@openmeetings.apache.org"/>
SMTP-Server	<input type="text" value="localhost"/>
SMTP-Server Port(default SmtP-Server Port is 25)	<input type="text" value="25"/>
SMTP-Username	<input type="text"/>
SMTP-Userpass	<input type="password"/>
Enable TLS in Mail Server Auth	<input type="checkbox"/>
Set inviter's email address as ReplyTo in email invitations	<input checked="" type="checkbox"/>
Default Language	<input type="text" value="inglés"/>

A valid example to configure the mail server with Gmail, is as follows:
(replace **john@gmail.com** with your real Gmail account)

Mail-Refer	==	john@gmail.com
SMTP-Server	==	smtp.gmail.com
SMTP-Server Port (default SmtP-Server Port is 25)	==	587
SMTP-Username	==	john@gmail.com
SMTP-Userpass	==	password of john@gmail.com
Enable TLS in Mail Server Auth	==	...turn green the button to activate

To select the language of your server OpenMeetings, please scroll on the line:

Default Language	==	...select your language
-------------------------	----	-------------------------

...the rest we can leave as is. If necessary, can modify it as you like it:

Now press the button  and a new page will appear:

OpenMeetings

Converters

Document conversion DPI ⓘ	<input style="width: 100%;" type="text" value="150"/>	
Document conversion JPEG Quality ⓘ	<input style="width: 100%;" type="text" value="90"/>	
ImageMagick Path ⓘ	<input style="width: 100%;" type="text"/>	<input type="button" value="Check"/>
FFMPEG Path ⓘ	<input style="width: 100%;" type="text"/>	<input type="button" value="Check"/>
SoX Path ⓘ	<input style="width: 100%;" type="text"/>	<input type="button" value="Check"/>
OpenOffice/LibreOffice Path for jodconverter ⓘ	<input style="width: 100%;" type="text"/>	<input type="button" value="Check"/>

see also [Installation](#)

Here we'll introduce the respective paths for the image, video, audio and conversion of uploaded files:


ImageMagick Path == /usr/bin


FFMPEG Path == /usr/local/bin

SOX Path == /usr/local/bin

**OpenOffice/LibreOffice Path for
jodconverter** == /usr/lib64/libreoffice

As you go introducing paths, you can check if they are correct by pressing the button labeled **Check**. If it does not display any error message, that is OK.

Once completed the paths, please click the  button and move on to another page that would be to activate the SIP. We will leave it as is, unless you want to activate it knowing what it does:

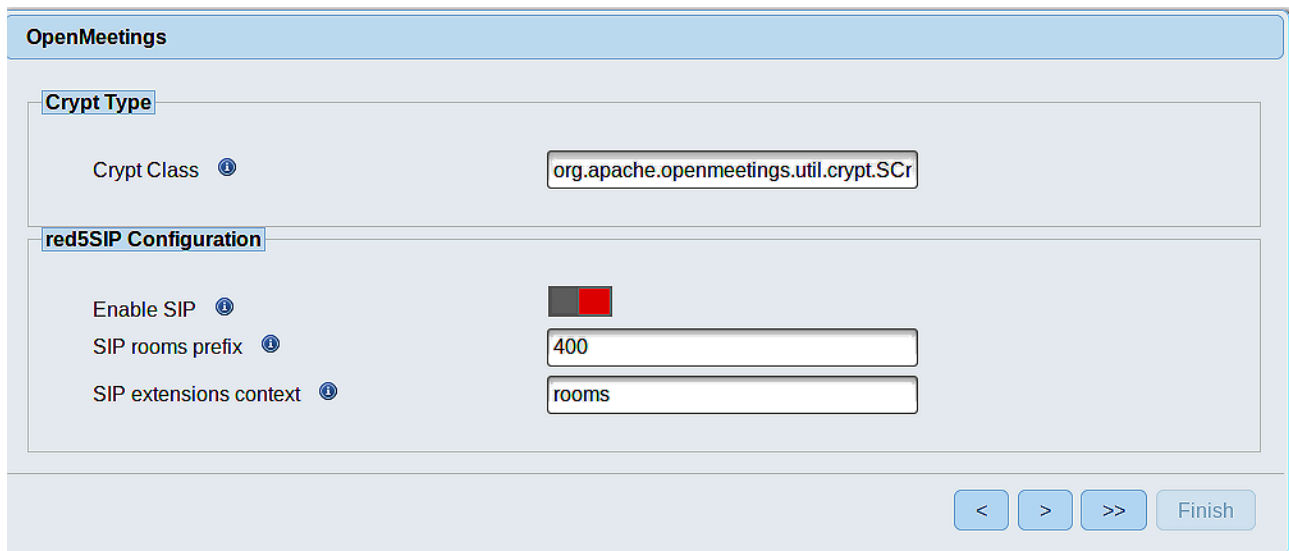

The screenshot shows the 'OpenMeetings' configuration window. It has a title bar 'OpenMeetings' and a 'Crypt Type' section with a 'Crypt Class' field containing 'org.apache.openmeetings.util.crypt.SCr'. Below that is the 'red5SIP Configuration' section, which includes an 'Enable SIP' checkbox (checked), a 'SIP rooms prefix' field with '400', and a 'SIP extensions context' field with 'rooms'. At the bottom right, there are navigation buttons: '<', '>', '>>', and 'Finish'.

Now push the button  Will show this window:



The screenshot shows the 'OpenMeetings' configuration window. The title bar is 'OpenMeetings'. The main content area contains the text 'Please click "Finish" button to start installation!' and a large empty text input field. At the bottom right, there are navigation buttons: '<', '>', '>>', and 'Finish'.

Clic **Finish** button...wait a seconds untill the tables are fill in the database.
When has concluded, this another page will appear. **Don't** clic on [Enter the Application](#).
First is need it to restart red5 server. Be connected to Internet:

`/etc/init.d/red5-2 restart`

OpenMeetings

[Enter the Application](#)

Database was changed, please restart application to avoid possible issues

If your Red5-Server runs on a different Port or on a different domain
alter the config values of the client

Mailing list
<http://openmeetings.apache.org/mail-lists.html>

There are some companies that also offer commercial support for Apache OpenMeetings:
<http://openmeetings.apache.org/commercial-support.html>

< > >> Finish

Now yes, you can clic on [Enter the Application](#), or go with your browser to:

<http://localhost:5080/openmeetings>

...and will take us to the entry of OpenMeetings:

Login

Username or mail address

Password

Remember login

[Forgotten your password?](#) [Network testing](#)

[Not a member?](#) [Sign in](#)

Introduce the user's name and the password that you have chosen during the installation, push **Sign in** button, and...

...**Congratulations!**

The next time that you like to accede OpenMeetings, would be:

<http://localhost:5080/openmeetings>

Remember to open in the server, the two following ports:

1935 5080


...in order that it could accede to OpenMeetings from other machines in Lan or Internet.

14)

----- **OpenMeetings's configuration** -----

Once you acced to OpenMeetings, if you would like to do any modification in the configuration, please go to:

Administration → Configuration

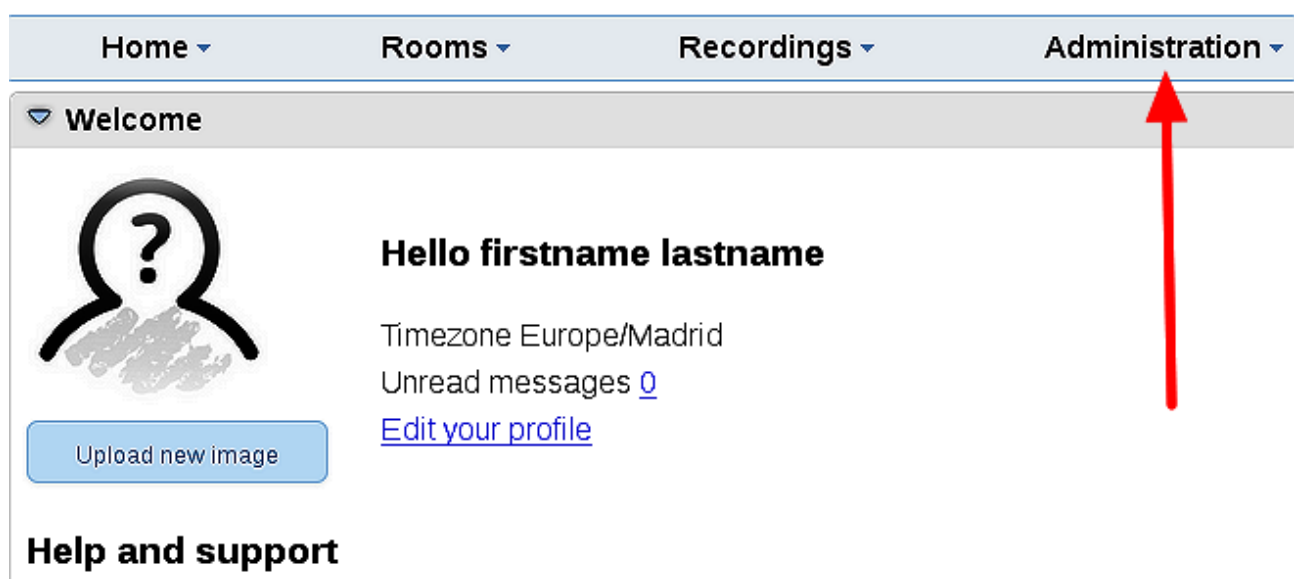

...and following the order of the red arrows:

Home Rooms Recordings Administration

50 Search

ID	Key	Value
1	crypt.class.name	org.apache.openmeetings.util.crypt.SCryptImplementation
2	allow.frontend.register	true
3	allow.soap.register	true
4	allow.oauth.register	true
5	default.group.id	1
6	mail.smtp.server	localhost
7	mail.smtp.port	25
8	mail.smtp.system.email	noreply@openmeetings.apache.org
9	mail.smtp.user	
10	mail.smtp.pass	
11	mail.smtp.starttls.enable	false
12	mail.smtp.connection.timeout	30000
13	mail.smtp.timeout	30000
14	application.name	OpenMeetings
15	default.lang.id	8
16	document.dpi	150
17	document.quality	90
18	path.imagemagick	
19	path.sox	
20	path.ffmpeg	
21	path.office	
22	dashboard.rss.feed1	http://mail-archives.apache.org/mod_mbox/openmeetings-user/?format=atom
23	dashboard.rss.feed2	http://mail-archives.apache.org/mod_mbox/openmeetings-dev/?format=atom
24	send.email.at.register	false
25	send.email.with.verification	false

Configuration

Type: string

Key: path.ffmpeg

Value:

Last update: Oct 17, 2017 5:54:57 PM

Updated by: toro

Comment: Path To FFMPEG

1 2 3

Chat

And this is all.



If you have some doubt or question, please raise it in the Apache OpenMeetings forums:

<http://openmeetings.apache.org/mail-lists.html>



Thank you.

Alvaro Bustos

