



## Installation of Apache OpenMeetings 4.0.2

on

### Fedora 27 final

This tutorial it is based on a fresh installation of

### Fedora-MATE\_Compiz-Live-x86\_64-27-1.6.iso

It is tested with positive result.  
We will use the Apache's binary version  
OpenMeetings 4.0.2 stable,  
that is to say we'll suppress his compilation.  
It is done step by step.

25-2-2018

Starting...

1)

At first place, modify Selinux level security, for the installation, and install nano editor:

```
dnf install nano
```

```
sudo nano /etc/selinux/config
```

...modify:

```
SELINUX=enforcing
```

...to

```
SELINUX=permissive
```

Press **Ctrl+x** and will ask to save, press **Y**, and **Enter**, to save and leave nano's editor.

2)

----- Update Operative System -----

Update operative system:

```
dnf update -y
```

...and reboot, for kernel changes if it is, and the new **Selinux** configuration:

```
reboot
```

3)

----- ADD Repos -----

```
## RPM Fusion repo ##
```

(Only one line without space between them)

```
su -c 'dnf install --nogpgcheck http://download1.rpmfusion.org/free/fedora/rpmfusion-free-release-27.noarch.rpm http://download1.rpmfusion.org/nonfree/fedora/rpmfusion-nonfree-release-27.noarch.rpm'
```

```
### Adobe repo 32 bit ### For Flash Player.
```

```
rpm -ivh http://linuxdownload.adobe.com/adobe-release/adobe-release-i386-1.0-1.noarch.rpm
```

```
rpm --import /etc/pki/rpm-gpg/RPM-GPG-KEY-adobe-linux
```

```
### Adobe repo 64-bit ### For Flash Player.
```

```
rpm -ivh http://linuxdownload.adobe.com/adobe-release/adobe-release-x86_64-1.0-1.noarch.rpm
```

```
rpm --import /etc/pki/rpm-gpg/RPM-GPG-KEY-adobe-linux
```

Update again:

```
dnf update -y
```

4)

## ----- Installation of packages and libraries -----

We install packages and libraries necessary:

(Only one line with a space between them)

```
dnf install -y libjpeg-turbo libjpeg-turbo-devel libjpeg-turbo-utils giflib-devel freetype-devel gcc-
c++ zlib-devel libtool bison bison-devel file-roller ghostscript freetype unzip gcc ncurses make
bzip2 wget ghostscript ncurses zlib git make automake nasm pavucontrol alsa-plugins-pulseaudio
nmap tomcat-native 'dnf-command(versionlock)'
```

5)

## ----- Installation of Java 1.8 -----

Java 1.8 is need it to work OpenMeetings 4.0.2. Will install Oracle Java 1.8.

-- Only for Fedora 32 bit --

```
cd /opt
```

Download the file:

(All in one line only. 1<sup>a</sup> and 2<sup>a</sup> without space between them. A space to the 3<sup>a</sup>. Together 3<sup>a</sup> and 4<sup>a</sup>)

```
wget --no-cookies --no-check-certificate --header "Cookie: gpw_e24=http%3A%2F
%2Fwww.oracle.com%2F; oraclelicense=accept-securebackup-cookie"
http://download.oracle.com/otn-pub/java/jdk/8u152-b16/aa0333dd3019491ca4f6ddbe78cdb6d0/jdk-
8u152-linux-i586.rpm
```

...and install it:

```
rpm -ivh jdk-8u152-linux-i586.rpm
```

-- Only for Fedora 64 bit --

```
cd /opt
```

Download the file:

(All in one line only. 1<sup>a</sup> and 2<sup>a</sup> without space between them. A space to the 3<sup>a</sup>. Together 3<sup>a</sup> and 4<sup>a</sup>)

```
wget --no-cookies --no-check-certificate --header "Cookie: gpw_e24=http%3A%2F
%2Fwww.oracle.com%2F; oraclelicense=accept-securebackup-cookie"
http://download.oracle.com/otn-pub/java/jdk/8u152-b16/aa0333dd3019491ca4f6ddbe78cdb6d0/jdk-
8u152-linux-x64.rpm
```

...and install it:

```
rpm -ivh jdk-8u152-linux-x64.rpm
```

-- Now for both, **32 bit** and **64 bit** –

May be you have installed different versions of Java. Please, select the just installed Oracle Java:

```
update-alternatives --config java
```

And to see if the selected version is active:

```
java -version
```

6)

#### ----- Installation of LibreOffice -----

LibreOffice it is installed already in the distro, but if you use a server iso then install it:

```
dnf -y install libreoffice
```

Is need it to convert uploaded office files to pdf.

7)

#### ----- Installation of ImageMagick and Sox -----

**ImageMagick**, work with the images files jpg, png, gif, etc. Install it:

```
dnf -y install ImageMagick
```

**Sox**, work with the audio. Install it:

```
dnf -y install sox
```

8)

#### ----- Installation of Adobe Flash Player -----

OpenMeetings even need Adobe Flash Player for cam. We install it:

```
dnf install -y flash-plugin
```

9)

----- **Compilation of FFmpeg** -----

FFmpeg will work with video. Will install a paquets and libraries.

(Only one line with space between both)

```
dnf install -y glibc alsa-lib-devel gsm gsm-devel imlib2 imlib2-devel libogg libvorbis vorbis-tools  
theora-tools libvpx-devel mercurial cmake curl git vlc
```

This ffmpeg compilation is based on this url, and updated to 25-2-2018.

<https://trac.ffmpeg.org/wiki/CompilationGuide/Centos>

I made a script to download, compile and install ffmpeg on Fedora. It is tested and is ok.  
The result of any recording we do in OpenMeetings, will be in mp4 format.

We download this script:

```
cd /opt
```

```
wget https://cwiki.apache.org/confluence/download/attachments/27838216/ffmpeg-fedora.sh
```

...concede execution permission:

```
chmod +x ffmpeg-fedora.sh
```

...and run it:

```
./ffmpeg-fedora.sh
```

The compilation will spend about 20-30 minutes.

At the end, a text will appear: **FFMPEG Compilation is Finished!**

Then, please go to **step 10**).

But if you prefer copy and paste, i **don't advise**, here are the commands script:

```
sudo nano /opt/ffmpeg-fedora.sh
```

...copy the green text **from here**:

```
# FFmpeg compilation for Fedora.  
# Alvaro Bustos, thanks to Hunter.
```

```

# Updated 25-2-2018

# Install libraries
dnf install -y autoconf automake cmake freetype-devel gcc gcc-c++ git libtool make mercurial nasm
pkgconfig zlib-devel

# Install yasm from repos
dnf install -y yasm

# Create a temporary directory for sources.
SOURCES=$(mkdir ~/ffmpeg_sources)
cd ~/ffmpeg_sources

# Download the necessary sources.
curl -#LO ftp://ftp.videolan.org/pub/x264/snapshots/last_stable_x264.tar.bz2
hg clone https://bitbucket.org/multicoreware/x265
git clone --depth 1 git://git.code.sf.net/p/opencore-amr/fdk-aac
curl -L -O http://downloads.sourceforge.net/project/lame/lame/3.99/lame-3.99.5.tar.gz
wget https://sources.voidlinux.eu/opus-1.2.1/opus-1.2.1.tar.gz
wget http://downloads.xiph.org/releases/ogg/libogg-1.3.2.tar.gz
wget http://downloads.xiph.org/releases/vorbis/libvorbis-1.3.5.tar.gz
wget http://downloads.xiph.org/releases/theora/libtheora-1.1.1.tar.gz
git clone --depth 1 https://chromium.googlesource.com/webm/libvpx.git
wget http://ffmpeg.org/releases/ffmpeg-3.4.2.tar.gz

# Unpack files
for file in `ls ~/ffmpeg_sources/*.tar.*`; do
tar -xvf $file

done

cd x264-*/
./configure --prefix="$HOME/ffmpeg_build" --bindir="$HOME/bin" --enable-static && make &&
make install && make distclean; cd ..

cd x265/build/linux
cmake -G "Unix Makefiles" -DCMAKE_INSTALL_PREFIX="$HOME/ffmpeg_build"
-DENABLE_SHARED:bool=off ../../source && make && make install; cd ~/ffmpeg_sources

cd fdk-aac
autoreconf -fiv && ./configure --prefix="$HOME/ffmpeg_build" --disable-shared && make &&
make install && make distclean; cd ..

cd lame-*/
./configure --prefix="$HOME/ffmpeg_build" --bindir="$HOME/bin" --disable-shared --enable-
nasm && make && make install && make distclean; cd ..

cd opus-*/
autoreconf -fiv && ./configure --prefix="$HOME/ffmpeg_build" --disable-shared && make &&
make install && make distclean; cd ..

```

```

cd libogg-*/
./configure --prefix="$HOME/ffmpeg_build" --disable-shared && make && make install &&
make distclean; cd ..

cd libvorbis-*/
LDFLAGS="-L$HOME/ffmpeg_build/lib" CPPFLAGS="-I$HOME/ffmpeg_build/include"
./configure --prefix="$HOME/ffmpeg_build" --with-ogg="$HOME/ffmpeg_build" --disable-shared
&& make && make install && make distclean; cd ..

cd libtheora-*/
./configure --prefix="$HOME/ffmpeg_build" --with-ogg="$HOME/ffmpeg_build" --disable-
examples --disable-shared --disable-sdltest --disable-vorbistest && make && make install; cd ..

cd libvpx
./configure --prefix="$HOME/ffmpeg_build" --disable-examples && make && make install &&
make clean; cd ..

cd ffmpeg-*/
PKG_CONFIG_PATH="$HOME/ffmpeg_build/lib/pkgconfig" ./configure
--prefix="$HOME/ffmpeg_build" --extra-cflags="-I$HOME/ffmpeg_build/include" --extra-
ldflags="-L$HOME/ffmpeg_build/lib" --bindir="$HOME/bin" --pkg-config-flags="--static"
--enable-gpl --enable-nonfree --enable-libfdk_aac --enable-libfreetype --enable-libmp3lame
--enable-libopus --enable-libvorbis --enable-libvpx --enable-libx264 --enable-libx265 --enable-
libtheora && make && make install && make distclean && hash -r; cd ..

cd ~/bin
cp ffmpeg ffprobe ffserver lame x264 /usr/local/bin

cd ~/ffmpeg_build/bin
cp x265 /usr/local/bin

echo "FFMPEG Compilation is Finished!"

```

...to here.

Concede permission of execution:

```
chmod +x /opt/ffmpeg-fedora.sh
```

```
cd /opt
```

Now be connected to Internet, run the script and wait some long minutes while the compilation:

```
./ffmpeg-fedora.sh
```

All the compiled files will be installed on: /usr/local/bin

10)

## ----- Installation of MariaDB data server -----

MariaDB is the data server fork of MySQL.

We install it:

```
dnf install -y mariadb mariadb-server
```

...and run MariaDB (be connected to Internet, to run it quickly):

```
systemctl start mariadb.service
```

Give a password to root in MariaDB. Please, replace **new-password** by your own which:

```
mysqladmin -u root password new-password
```

Make a database for OpenMeetings:

```
mysql -u root -p
```

...will ask for the root password we does just now:

```
MariaDB [(none)]> CREATE DATABASE open402 DEFAULT CHARACTER SET 'utf8';
```

Now we create a user with all permission on this open402 database. User password must be of 8 digits minimum:

(Only one line with space between both)

```
MariaDB [(none)]> GRANT ALL PRIVILEGES ON open402.* TO 'hola'@'localhost'
IDENTIFIED BY '1a2B3c4D' WITH GRANT OPTION;
```

```
* open402 ..... name of the database
* hola ..... user for that database
* 1a2B3c4D ..... password of that user
```

You can change the data...but remember it! Later we'll need it.

Now we leave MariaDB:

```
MariaDB [(none)]> quit
```

11)

## ----- Installation of Apache OpenMeetings -----



Make a folder called **red5402** where download the Apache OpenMeetings file, and where we'll do the installation:

```
mkdir /opt/red5402
```

```
cd /opt/red5402
```

...and download the file:

```
wget http://apache.miloslavbrada.cz/openmeetings/4.0.2/bin/apache-openmeetings-4.0.2.zip
```

```
unzip apache-openmeetings-4.0.2.zip
```

...save the original file to /opt:

```
mv apache-openmeetings-4.0.2.zip /opt
```

12)

----- **Connector Java MariaDB** -----

This file is need it to connect OpenMeetings with MariaDB:

```
cd /opt
```

(Only one line without space between both)

```
wget http://repo1.maven.org/maven2/mysql/mysql-connector-java/5.1.45/mysql-connector-java-5.1.45.jar
```

```
cp mysql-connector-java-5.1.45.jar /opt/red5402/webapps/openmeetings/WEB-INF/lib
```

13)

----- **Configuration of OpenMeetings for MariaDB** -----

Will configure OpenMeetings to connect with our database in MariaDB:

(Only one line without space between both)

```
sudo nano /opt/red5402/webapps/openmeetings/WEB-INF/classes/META-INF/mysql_persistence.xml
```

**Modify line 72:**

```
Url=jdbc:mysql://localhost:3306/openmeetings?.....
```

to

```
Url=jdbc:mysql://localhost:3306/open402?....
```

...open402 is the database name we gives when install MariaDB and build it.

If you choose any other database name, here is where to replace it.

Press **Ctrl+x**, will ask to save, pres **Y** and **Enter** to exit nano editor.

Protect the access to this file:

(Only one line without space between both )

```
chmod 6402 /opt/red5402/webapps/openmeetings/WEB-INF/classes/META-INF/mysql_persistence.xml
```

14)

----- **Script to launch red5-OpenMeetings** -----

We'll download the script to run Red5-OpenMeetings on Fedora:

```
cd /opt
```

```
wget https://cwiki.apache.org/confluence/download/attachments/27838216/red5-2
```

...copy it to where must be:

```
cp red5-2 /etc/init.d/
```

...and concede execution permission:

```
chmod +x /etc/init.d/red5-2
```

If you made the installation in any other different path to /opt/red5402, please edit the script and modify the line:

```
RED5_HOME=/opt/red5402
```

...to

```
RED5_HOME=/your-path-installation
```

15)

----- **Run red5-OpenMeetings** -----

Run MariaDB (be connected to Internet, to run it quickly):

```
systemctl start mariadb.service
```

...and red5-OpenMeetings (be connected to Internet, to run it quickly):

`/etc/init.d/red5-2 start`

...wait until the text “**CleanupJob.cleanRoomFiles**”, it is the last in the shell. Be patience. Then, go with the browser to:

<http://localhost:5080/openmeetings/install>

...there will show a page similar to this one:

**OpenMeetings**

**1. Enabling import of PDFs into whiteboard**

- Install **GhostScript** on the server, you can get more information on <http://pages.cs.wisc.edu/~ghost/> regarding installation. The instructions for installation can be found there, however on most linux systems you can get it via your favorite package managers (apt-get it).

**If you have further questions or need support in installation or hosting:**

**Community-Support:**  
[Mailing lists](#)

**Commercial-Support:**  
[Commercial-Support](#)

< > >> Finish

...press on  (bottom), and will show the default database configuration with Derby, but we employ MySQL (MariaDB):

**OpenMeetings**

**DB configuration**

**Recommendation for production environment**

By default OpenMeetings uses the integrated [Apache Derby](#) database. For production environment you should consider using [MySQL](#), [PostgreSQL](#), [IBM DB2](#), [MSSQL](#) or [Oracle](#)

**NOTE** Please use unpredictable DB login and 'strong' password with length 8 characters or more.

Choose DB type

Specify the name of the database

Check

< > >> Finish

...then, scroll and **Choose DB type** to MySQL:

**OpenMeetings**

**DB configuration**

**Recommendation for production environment**

By default OpenMeetings uses the integrated [Apache Derby](#) database. For production environment you should consider using [MySQL](#), [PostgreSQL](#), [IBM DB2](#), [MSSQL](#) or [Oracle](#)

**NOTE** Please use unpredictable DB login and 'strong' password with length 8 characters or more.

Choose DB type

Specify DB host

Specify DB port

Specify the name of the database

Specify DB user

Specify DB password

...will show the data base configuration we made in step 13.

If you`ve choose any other different name for this, will show equally.

Now we must introduce the user name we did for our data base, at the step 10, and his password:

**Specify DB user** = **hola**

**Specify DB password** = **1a2B3c4D**

...if you choose any other data please type it here.

Press  button, and will go to:

**OpenMeetings**

**Userdata**

Username

Userpass

EMail

User Time Zone

**Group(Domains)**

Name

Here, we must introduce a user name for OpenMeetings, and his password. This must have 8 digits minimum, and at least 1 special symbol like: + ( % # ! ...etc.


**Username** = a-name ...This user name will have administrator rights.

**Userpass** = a-password ....for the previous user

**EMail** = email-adress ...of the previous user.

**User Time Zone** = country where is this server

**Name** = example-openmeetings ...group name to choose

Press the button  and will lead us to a new page (below) where you can select the language for your OpenMeetings server, as well as other options such as the configuration of the mail server being used to send invitations or meetings from OpenMeetings:

**OpenMeetings**

**Configuration**

Allow self-registering	<input checked="" type="checkbox"/>
Send Email to new registered Users	<input type="checkbox"/>
New Users need to verify their EMail	<input type="checkbox"/>
Default DB objects of all types will be created (including Rooms, OAuth2 servers etc.)	<input checked="" type="checkbox"/>
Mail-Referer	<input type="text" value="noreply@openmeetings.apache.org"/>
SMTP-Server	<input type="text" value="localhost"/>
SMTP-Server Port(default SmtP-Server Port is 25)	<input type="text" value="25"/>
SMTP-Username	<input type="text"/>
SMTP-Userpass	<input type="password"/>
Enable TLS in Mail Server Auth	<input type="checkbox"/>
Set inviter's email address as ReplyTo in email invitations	<input checked="" type="checkbox"/>
Default Language	<input type="text" value="inglés"/>

A valid example to configure the mail server with Gmail, is as follows:  
(replace **john@gmail.com** with your real Gmail account)


<b>Mail-Refer</b>	==	john@gmail.com
<b>SMTP-Server</b>	==	smtp.gmail.com
<b>SMTP-Server Port (default SmtP-Server Port is 25)</b>	==	587
<b>SMTP-Username</b>	==	john@gmail.com
<b>SMTP-Userpass</b>	==	password of john@gmail.com
<b>Enable TLS in MailServer Auth</b>	==	...turn green the button to activate

To select the language of your server OpenMeetings, please scroll on the line:

<b>Default Language</b>	==	...select your language
-------------------------	----	-------------------------

...the rest you can change it as you like.

Now press the button  and a new page will appear:

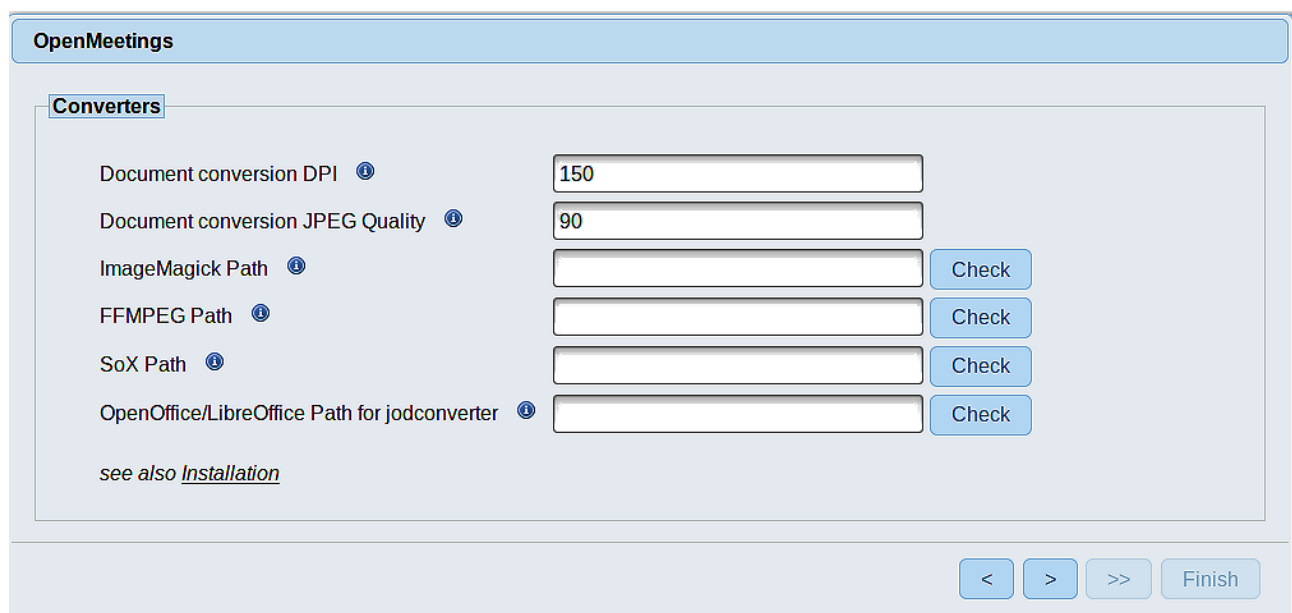

**OpenMeetings**

**Converters**

Document conversion DPI ⓘ

Document conversion JPEG Quality ⓘ

ImageMagick Path ⓘ

FFMPEG Path ⓘ

SoX Path ⓘ

OpenOffice/LibreOffice Path for jodconverter ⓘ

see also [Installation](#)


< > >> Finish

Here we'll introduce the respective paths for the image, video, audio and conversion of uploaded files:

**ImageMagick Path (Path)** == /usr/bin  
**FFMPEG Path (Path)** == /usr/local/bin  
**SOX Path (Path)** == /usr/bin  
**OpenOffice/LibreOffice Path (Path) for jodconverter** == /usr/lib/libreoffice **(32bits)**  
 == /usr/lib64/libreoffice **(64bits)**

As you go introducing paths, you can check if they are correct by pressing the button labeled **Check**. If it does not display any error message, that is OK.

Once completed the paths, please click the button  and move on to another page that would be to activate the SIP. We will leave it as is, unless you want to activate it knowing what it does:

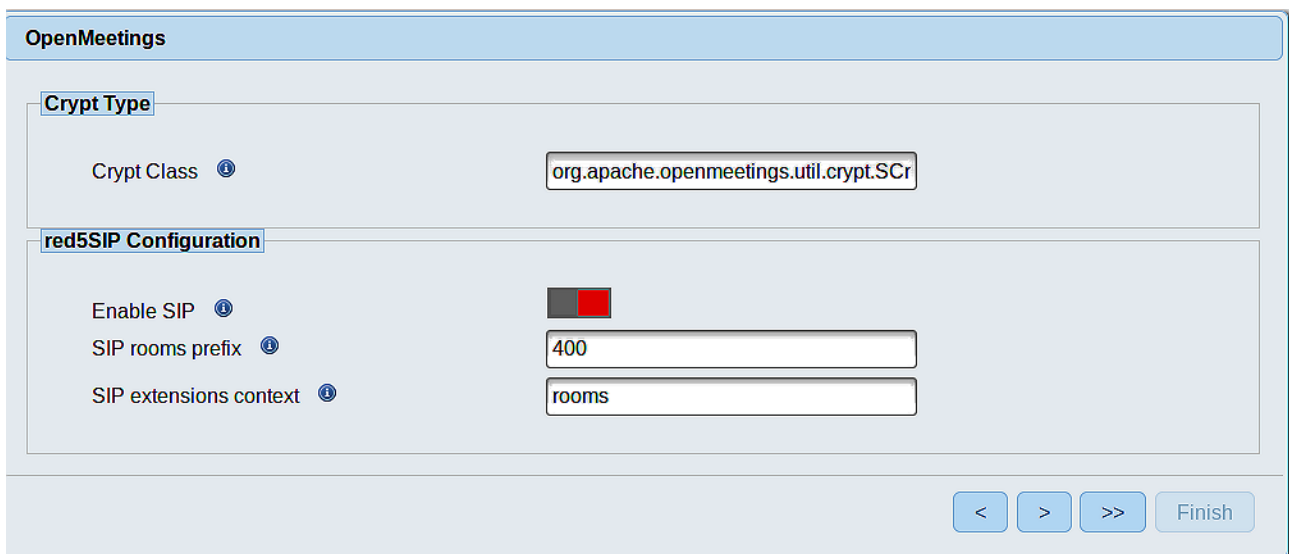


The screenshot shows the 'OpenMeetings' configuration window. It has a title bar 'OpenMeetings' and a light blue header. Below the header, there are two main sections:

- Crypt Type**: Contains a 'Crypt Class' label with an information icon and a text input field containing 'org.apache.openmeetings.util.crypt.SCr'.
- red5SIP Configuration**: Contains three items:
  - 'Enable SIP' with a toggle switch that is currently turned off (grey).
  - 'SIP rooms prefix' with a text input field containing '400'.
  - 'SIP extensions context' with a text input field containing 'rooms'.

At the bottom right of the window, there are four buttons: '<', '>', '>>', and 'Finish'.

Now push the button  Will show this window:

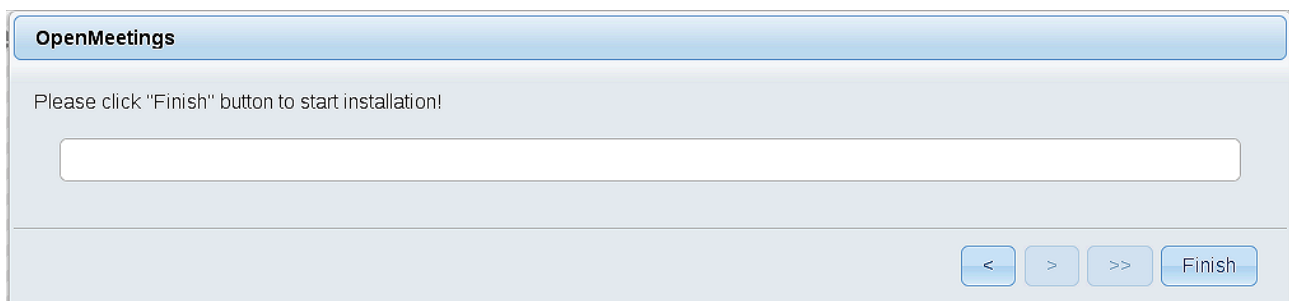

The screenshot shows the 'OpenMeetings' window after clicking the next button. The title bar is 'OpenMeetings'. The main content area contains the text 'Please click "Finish" button to start installation!' and a large empty text input field below it. At the bottom right, there are four buttons: '<', '>', '>>', and 'Finish'.

Push **Finish** button ...wait a seconds until the tables are fill in the database.

When has concluded, this another page will appear. **Don't** clic on [Enter the Application](#).  
First is need it to restart the server (be connected to Internet):

`/etc/init.d/red5-2 restart`

**OpenMeetings**

[Enter the Application](#)

**Database was changed, please restart application to avoid possible issues**

If your Red5-Server runs on a different Port or on a different domain  
alter the config values of the client

**Mailing list**  
<http://openmeetings.apache.org/mail-lists.html>

**There are some companies that also offer commercial support for Apache OpenMeetings:**  
<http://openmeetings.apache.org/commercial-support.html>

< > >> Finish

Now yes, you can clic on [Enter the Application](#), or go with your browser to:

<http://localhost:5080/openmeetings>

...and will take us to the entry of OpenMeetings:

**Login**

Username or mail address

Password

Remember login

[Forgotten your password?](#) [Network testing](#)



Introduce the user's name and the password that you have chosen during the installation, push **Sign in** button and...

...**Congratulations!**

The next time that you like accede to OpenMeetings, would be:

<http://localhost:5080/openmeetings>

Remember to open in the server, the two following ports:

**1935 5080**


...in order that it could accede to OpenMeetings from other machines in Lan or from Internet.

16)

----- **Configuration of OpenMeetings** -----

Once you acced to OpenMeetings, if you would like to do any modification in the configuration, please go to:

**Administration → Configuration**

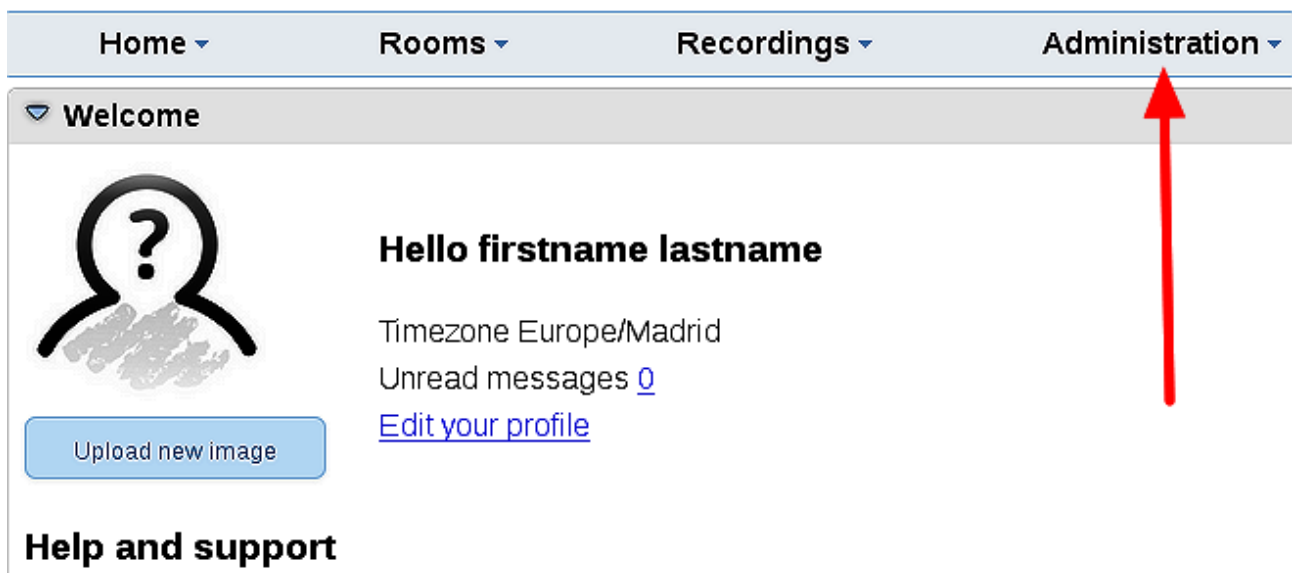

...and following the order of the red arrows:

The screenshot shows the Administration section of the Apache OpenMeetings interface. On the left is a table of configuration items, and on the right is a configuration form for the selected item.

ID	Key	Value
1	crypt.class.name	org.apache.openmeetings.util.crypt.SCryptImplementation
2	allow.frontend.register	true
3	allow.soap.register	true
4	allow.oauth.register	true
5	default.group.id	1
6	mail.smtp.server	localhost
7	mail.smtp.port	25
8	mail.smtp.system.email	noreply@openmeetings.apache.org
9	mail.smtp.user	
10	mail.smtp.pass	
11	mail.smtp.starttls.enable	false
12	mail.smtp.connection.timeout	30000
13	mail.smtp.timeout	30000
14	application.name	OpenMeetings
15	default.lang.id	8
16	document.dpi	150
17	document.quality	90
18	path.imagemagick	
19	path.sox	
20	path.ffmpeg	
21	path.office	
22	dashboard.rss.feed1	http://mail-archives.apache.org/mod_mbox/openmeetings-user/?format=atom
23	dashboard.rss.feed2	http://mail-archives.apache.org/mod_mbox/openmeetings-dev/?format=atom
24	send.email.at.register	false
25	send.email.with.verification	false

The configuration form on the right shows the details for the selected item (ID 20, Key path.ffmpeg):

- Type: string
- Key: path.ffmpeg
- Value: (empty text box)
- Last update: Oct 17, 2017 5:54:57 PM
- Updated by: toro
- Comment: Path To FFMPEG

Red arrows indicate the sequence of actions: Arrow 1 points from the 'path.ffmpeg' row in the table to the configuration form. Arrow 2 points from the 'Value' field in the form to the 'Value' field in the table. Arrow 3 points from the 'Configuration' form title to the table.

And this is all.

If you have some doubt or question, please expose it in Apache OpenMeetings forums:

<http://openmeetings.apache.org/mail-lists.html>



Thank you.

Alvaro Bustos

