



Installation of Apache OpenMeetings 5.0.0

on

Fedora 32 final

This tutorial it is based on a fresh installation of

Fedora-MATE_Compiz-Live-x86_64-32-1.6.iso

My sincere thanks to Maxim Solodovnik for his help, without which i could not have finished this tutorial satisfactorily.

It is done step by step.

Starting...

1)

At first place, modify Selinux level security, for the installation, and install nano editor:

`su`

`dnf install nano`

```
sudo nano /etc/selinux/config
```

...modify:

```
SELINUX=enforcing
```

...to

```
SELINUX=permissive
```

Press **Ctrl+x** and will ask to save, press **Y**, and **Enter**, to save and leave nano's editor.

Add our user system to sudoers, so can use sudo:

```
nano /etc/sudoers
```

...copy and paste replacing **user** by your real user system name:

```
user ALL=(ALL:ALL) ALL
```

...press in the keyboard **Ctrl+x**, will ask to save, press **Y**, and press **Enter** to exit nano editor.

```
exit ...exit as root.
```

2)

----- Update the system -----

Update the system:

```
sudo dnf update -y
```

...and reboot the machine to get effect the changes. After reboot continue at step 3:

```
sudo reboot
```

3)

----- ADD Repos -----

```
## RPM Fusion repo ##
```

(Only one line without space between them)

```
sudo su -c 'dnf install --nogpgcheck http://download1.rpmfusion.org/free/fedora/rpmfusion-free-release-32.noarch.rpm http://download1.rpmfusion.org/nonfree/fedora/rpmfusion-nonfree-release-32.noarch.rpm'
```

Update again:

```
sudo dnf update -y
```

4)

----- **Installation of Java** -----

Java 11 is needed to work OpenMeetings 5.0.0. Will install OpenJava 11.

-- Only for Fedora **32 bit** --

```
sudo dnf install java-11-openjdk.i686 java-11-openjdk-headless.i686
```

-- Only for Fedora **64 bit** --

```
sudo dnf install java-11-openjdk.x86_64 java-11-openjdk-headless.x86_64
```

May be you have installed different versions of Java. Please, select the just installed OpenJava 11:

```
sudo update-alternatives --config java
```

...and to see if the selected version is active:

```
sudo java -version
```

5)

----- **Installation of LibreOffice** -----

LibreOffice it is installed already in the desktop-distro, but especially for server iso:

```
sudo dnf -y install libreoffice
```

Is needed to convert uploaded office files to pdf.

6)

----- **Installation of ImageMagick and Sox** -----

ImageMagick, work with the images files jpg, png, gif, etc. Install it:

```
sudo dnf -y install ImageMagick
```

Sox, work with the audio. Install it:

```
sudo dnf -y install sox
```

7)

----- **Installation of FFmpeg** -----

FFmpeg will work the video. Will install it:

```
sudo dnf install -y ffmpeg
```

8)

----- **Installation of MariaDB data server** -----

MariaDB is the data server fork of MySQL.

We install it:

```
sudo dnf install -y mariadb mariadb-server
```

...and run MariaDB (be connected to Internet, to run it quickly):

```
sudo systemctl start mariadb.service
```

Give a password to MariaDB root. Please, replace **new-password** by your own which:

```
sudo mysqladmin -u root password new-password
```

Make a database for OpenMeetings:

```
sudo mysql -u root -p
```

...will ask for the root password you choose just now:

```
MariaDB [(none)]> CREATE DATABASE open500 DEFAULT CHARACTER SET 'utf8';
```

Now we create a user with all permission on this open500 database. User password must be of 8 digits minimum:

(Only one line with space between both)

```
MariaDB [(none)]> GRANT ALL PRIVILEGES ON open500.* TO 'hola'@'localhost'  
IDENTIFIED BY '1a2B3c4D' WITH GRANT OPTION;
```

- * open500 name of the database
- * hola user for that database
- * 1a2B3c4D password of that user

You can change the data...but remember it! Later we'll need it.

Now we leave MariaDB:

```
MariaDB [(none)]> quit
```

9)

----- Installation of Apache OpenMeetings -----

We'll install OpenMeetings in /opt/open500. All the following information will be based on this directory:

```
cd /opt
```

...download and uncompress the file:

```
sudo wget https://archive.apache.org/dist/openmeetings/5.0.0/bin/apache-openmeetings-5.0.0.tar.gz
```

...uncompress it:

```
sudo tar xzvf apache-openmeetings-5.0.0.tar.gz
```

...and rename the obtained folder:

```
sudo mv apache-openmeetings-5.0.0 open500
```

10)

----- Installation connector OpenMeetings with MariaDB -----

This file-driver is need it to connect OpenMeetings with MariaDB. Download and install it:

```
cd /opt
```

(Only one line without space between both)

```
sudo wget https://repo1.maven.org/maven2/mysql/mysql-connector-java/8.0.20/mysql-connector-  
java-8.0.20.jar
```

```
sudo cp mysql-connector-java-8.0.20.jar /opt/open500/webapps/openmeetings/WEB-INF/lib
```

11)

----- **Script to launch Tomcat-OpenMeetings** -----

We'll download the script to run Tomcat-OpenMeetings:

```
cd /opt
```

```
sudo wget https://cwiki.apache.org/confluence/download/attachments/27838216/tomcat3
```

...copy it to where must be:

```
sudo cp tomcat3 /etc/init.d/
```

...and concede execution permission:

```
sudo chmod +x /etc/init.d/tomcat3
```

If you made the installation in any other different path to /opt/open500, please edit the script and modify the line:

```
CATALINA_HOME=/opt/open500
```

...to

```
CATALINA_HOME=/your-path-installation
```

12)

----- **Run Tomcat-OpenMeetings** -----

Run MariaDB:

```
sudo systemctl start mariadb.service
```


...and Tomcat-OpenMeetings:

```
sudo /etc/init.d/tomcat3 start
```


...wait about 40 seconds in order Tomcat run completely. Then, go with the browser to:

<https://localhost:5443/openmeetings>

...there will show a page similar to this one:

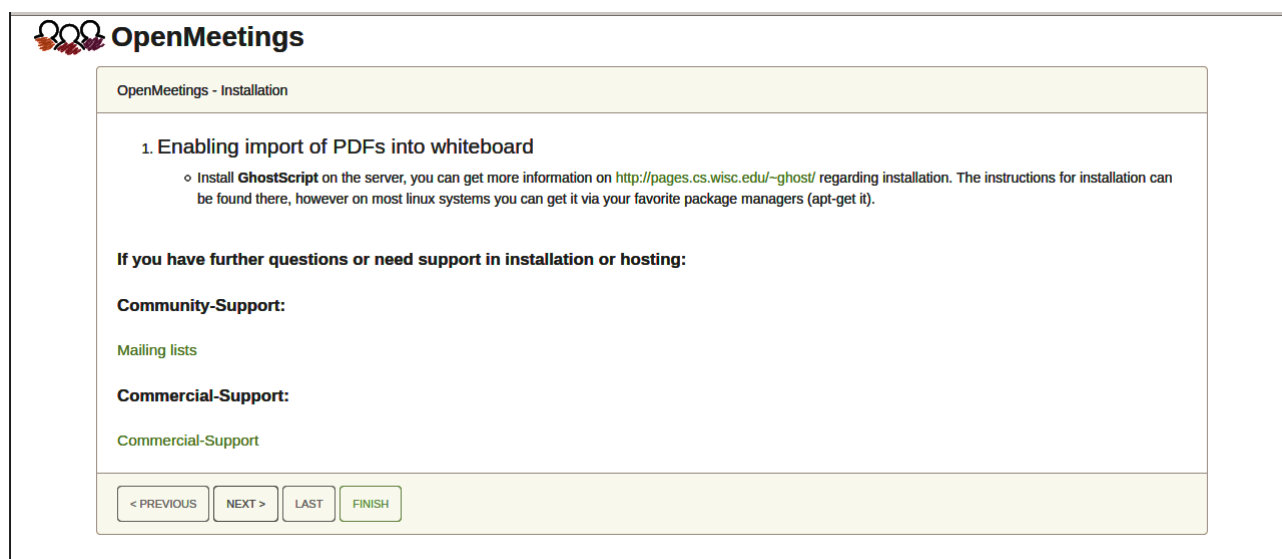

...press on “Next >” (bottom), and will show the default database configuration with H2, but we employ MySQL (MariaDB):

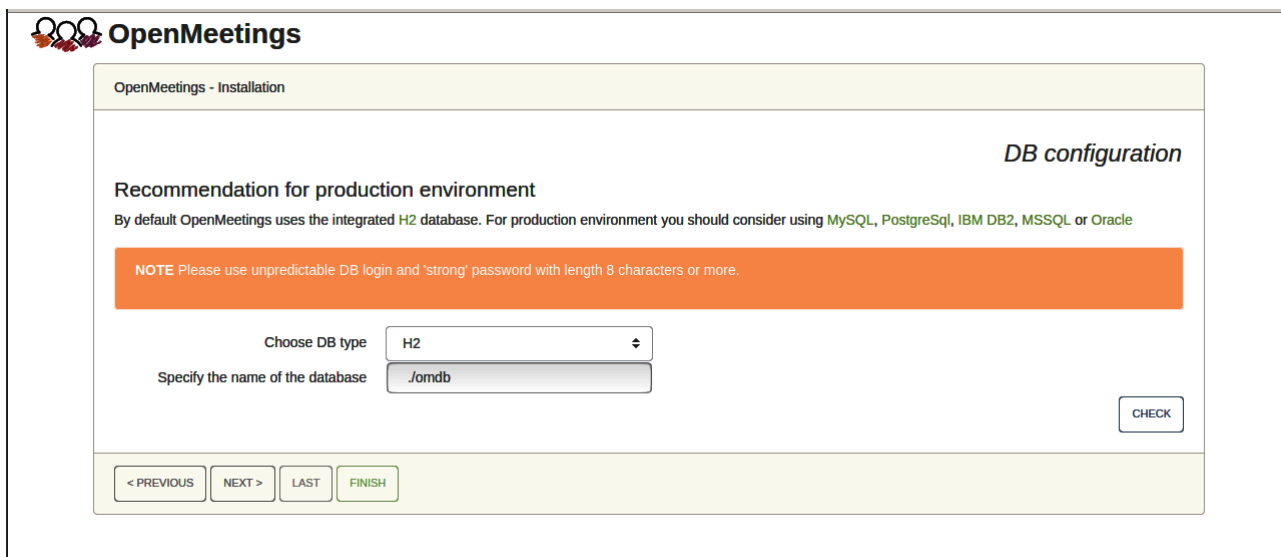

OpenMeetings

OpenMeetings - Installation

DB configuration

Recommendation for production environment
By default OpenMeetings uses the integrated H2 database. For production environment you should consider using MySQL, PostgreSQL, IBM DB2, MSSQL or Oracle


NOTE Please use unpredictable DB login and 'strong' password with length 8 characters or more.

Choose DB type:

Specify the name of the database:

< PREVIOUS NEXT > LAST FINISH

...then, scroll and **Choose DB type** to MySQL:

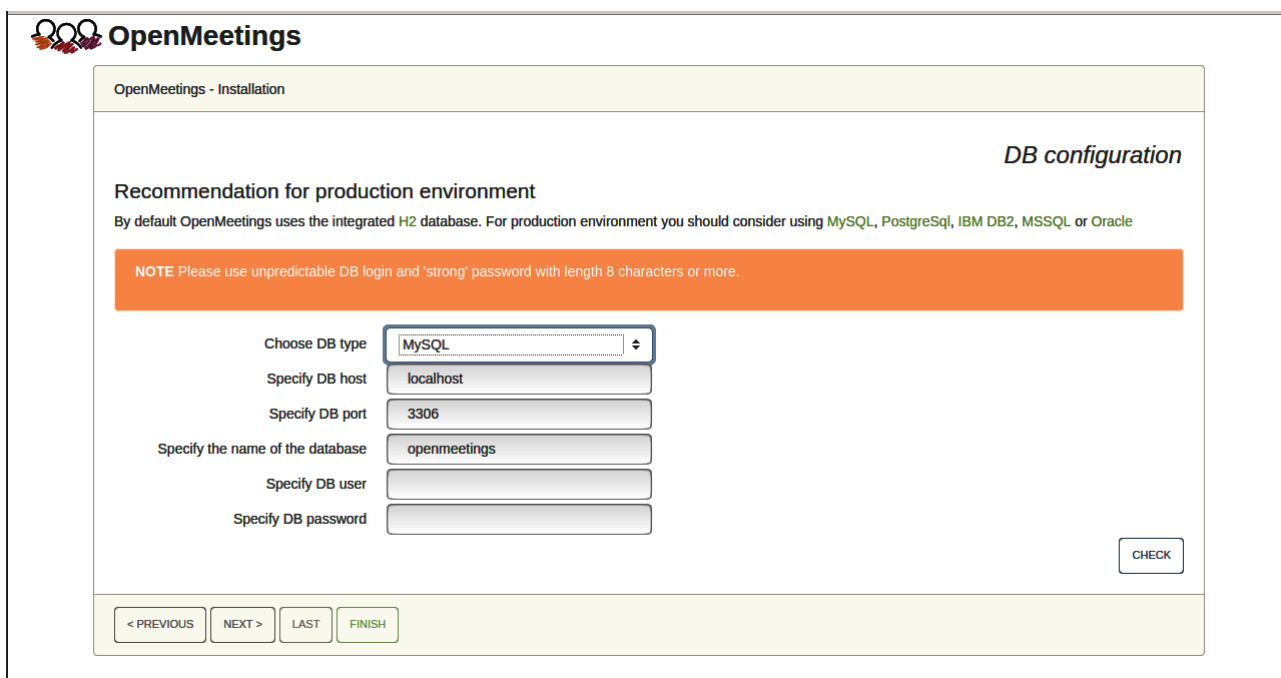

OpenMeetings

OpenMeetings - Installation

DB configuration

Recommendation for production environment
By default OpenMeetings uses the integrated H2 database. For production environment you should consider using MySQL, PostgreSQL, IBM DB2, MSSQL or Oracle

NOTE Please use unpredictable DB login and 'strong' password with length 8 characters or more.

Choose DB type:

Specify DB host:

Specify DB port:

Specify the name of the database:

Specify DB user:

Specify DB password:

< PREVIOUS NEXT > LAST FINISH

Now we must introduce the database name, the user name and his password we did at the step 8:

Specify the name of the database = open500

Specify DB user = hola

Specify DB password = 1a2B3c4D

...if you choose any other data please type it here.

Press “Next >” button, and will go to:

Here, we must introduce a user name for OpenMeetings, and his password. This must have 8 digits minimum, and at least 1 special symbol like: + (% # ! ...etc.

Username = a-name ...This user name will have administrator rights.

Userpass = a-passwordfor the previous user

EMail = email-adress ...of the previous user.

User Time Zone = country where is this server

Name = exemple-openmeetings ...group name to choose

Press the button “Next >” and will lead us to a new page (below) where you can select the language for your OpenMeetings server, as well as other options such as the configuration of the mail server being used to send invitations or meetings from OpenMeetings:

OpenMeetings

OpenMeetings - Installation

Configuration

Allow self-registering

Send Email to new registered Users

New Users need to verify their EMAIL

Default DB objects of all types will be created (including Rooms, OAuth2 servers etc.)

Mail-Referer

SMTP-Server

SMTP-Server Port(default SmtP-Server Port is 25)

SMTP-Username

SMTP-Userpass

Enable TLS in Mail Server Auth

Set inviter's email address as ReplyTo in email invitations

Default Language

< PREVIOUS NEXT > LAST FINISH

A valid example to configure the mail server with Gmail, is as follows:

(replace **john@gmail.com** with your real Gmail account)

Mail-Refer == john@gmail.com

SMTP-Server == smtp.gmail.com

SMTP-Server Port (default SmtP-Server Port is 25) == 587

SMTP-Username == john@gmail.com

SMTP-Userpass == password of john@gmail.com

Enable TLS in MailServer Auth == ...turn green the button to activate

To select the language of your OpenMeetings server, please scroll on the line:

Default Language == ...select your language

...the rest you can change it as you like.

Now press the button “Next >” and a new page will appear:

OpenMeetings - Installation

Converters

Document conversion DPI ⓘ

Document conversion JPEG Quality ⓘ

ImageMagick Path ⓘ CHECK

FFMPEG Path ⓘ CHECK

SoX Path ⓘ CHECK

OpenOffice/LibreOffice Path for jodconverter ⓘ CHECK

see also Installation

< PREVIOUS NEXT > LAST FINISH

Here we'll introduce the respective paths for the image, video, audio and conversion of uploaded files (LibreOffice):

ImageMagick Path == `/usr/bin`

FFMPEG Path == `/usr/bin`

SOX Path == `/usr/bin`

OpenOffice/LibreOffice Path for jodconverter == `/usr/lib/libreoffice` **(32bits)**
 == `/usr/lib64/libreoffice` **(64bits)**


As you go introducing paths, you can check if they are correct by pressing the button labeled **Check**.


Once completed the paths, please click the button “**Next >**” and move on to another page that we will leave it as is:


OpenMeetings


OpenMeetings - Installation

Crypt Type

Crypt Class  org.apache.openmeetings.util.crypt.

Enable SIP 

SIP rooms prefix  400

SIP extensions context  rooms

< PREVIOUS NEXT > LAST FINISH

Now push the button “**Next >**” Will show this window:

OpenMeetings

OpenMeetings - Installation

Please click "Finish" button to start installation!

0%

< PREVIOUS NEXT > LAST FINISH

Press “**Finish**” button ...wait a seconds until the tables are fill in the database.
 When has concluded, this another page will appear. **Don't** clic on [Enter the Application](#).
 First is need it to restart the server (be connected to Internet):

`sudo /etc/init.d/tomcat3 restart`

OpenMeetings

OpenMeetings - Installation

Enter the Application

Database was changed, please restart application to avoid possible issues

Mailing list


<https://openmeetings.apache.org/mailling-lists.html>

There are some companies that also offer commercial support for Apache OpenMeetings:

<https://openmeetings.apache.org/commercial-support.html>

< PREVIOUS NEXT > LAST FINISH

Now you can click on [Enter the Application](#) and it will take you to the OpenMeetings entry. **But wait before entering OpenMeetings, we have to install Podman and Kurento-Media-Server,** something we will do in the next steps, so that you can have access to the camera, micro, recording and desktop sharing in the room

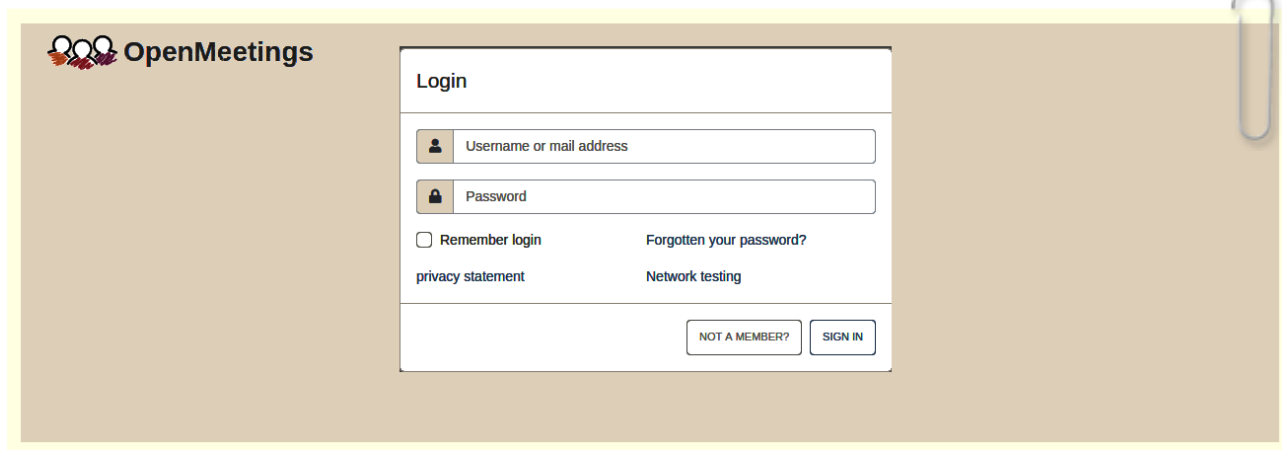

13)

----- Installation of Podman -----

Podman will be the recipient of Kurento Media Server. First we install some necessary libraries:

```
sudo dnf -y install dnf-plugins-core
```

...install podman:

```
sudo dnf install podman
```

Stop Tomcat-OpenMeetings and Mariadb:

```
sudo /etc/init.d/tomcat3 stop
```

```
sudo systemctl stop mariadb.service
```

...and reboot the machine. After this, follow in the step **14**):

```
sudo reboot
```

14)

----- Installation of Kurento-Media-Server -----

After had rebooted the computer, we'll install Kurento-Media-Server needed for cam, mic-audio, recordings and share dektop in room.

First run podman:

```
sudo systemctl start podman.service
```

...and install kurento-media-server:

(Only one line, with space between 1 and 2, and without space between 2 and 3)

```
sudo podman run -d --name kms -p 8888:8888 --mount  
type=bind,source=/opt/open500/webapps/openmeetings/data,target=/opt/open500/webapps/  
openmeetings/data kurento/kurento-media-server
```

Run kurento-media-server, wich name its kms:

```
sudo podman start kms
```

...and run also MariaDB and tomcat-OpenMeetings:

```
sudo systemctl start mariadb.service
```

```
sudo /etc/init.d/tomcat3 start
```

...wait around 40 seconds to tomcat run completly.

Now you can access OpenMeetings with all the functions at your disposal.

Clic the link down and type the user name and his password to login:

<https://localhost:5443/openmeetings>

To connect to this server from Internet or LAN is necessary open the following ports:

5443 8888

After installing OpenMeetings, you still need to install Coturn (Turn server), for which you can download the following tutorial and follow it from step 5:

[Installation SSL certificates and Coturn for OpenMeetings 5.0.0 on Fedora 32](#)

15)

----- Configuration of OpenMeetings -----

Once you acced to OpenMeetings, if you would like to do any modification in the configuration, please go to:

Administration → Configuration

The screenshot displays the OpenMeetings web application interface. At the top left is the OpenMeetings logo. The top right navigation bar includes links for "Contacts and messages", "Profile", "Logout", "Report a bug", and "About". Below this is a secondary navigation bar with "HOME", "ROOMS", "RECORDINGS", and "ADMINISTRATION" (the latter is highlighted with a red arrow). The main content area is divided into three sections: "Welcome" (with a user profile card for "Hello firstname lastname" and links for "Project website", "User mailing list", "Network testing", and "Check setup"), "My rooms" (listing "My conference room" and "My presentation room" with "ENTER" buttons and a "Users in this room" field), and "Admin functions" (with a "SHOW CLEANUP REPORT" button). A "Chat" window is visible at the bottom right.

...and following the order of the red arrows:

The screenshot shows the OpenMeetings Administration interface. On the left is a table of configuration items, and on the right is a configuration form for a selected item. Red arrows indicate the flow of information from the table to the form.

ID	Key	Value
1	crypt.class.name	org.apache.openmeetings.util.crypt.SCryptImplementation
2	allow.frontend.register	true
3	allow.soap.register	true
4	allow.oauth.register	true
5	default.group.id	1
6	mail.smtp.server	localhost
7	mail.smtp.port	25
8	mail.smtp.system.email	noreply@openmeetings.apache.org
9	mail.smtp.user	
10	mail.smtp.pass	
11	mail.smtp.starttls.enable	false
12	mail.smtp.connection.timeout	30000
13	mail.smtp.timeout	30000
14	application.name	OpenMeetings
15	default.lang.id	1
16	document.dpi	150
17	document.quality	90
18	path.imagemagick	
19	path.sox	
20	path.ffmpeg	/usr/local/bin
21	path.office	/usr/lib/libreoffice
22	dashboard.rss.feed1	https://mail-archives.apache.org/mod_mbox/openmeetings-user/?format=atom

The configuration form on the right includes fields for Type (STRING), Key, Value, Last update, Updated by, and Comment. Red arrows point from the table to the form: arrow 1 points to the 'path.fmpeg' row, arrow 2 points to the 'Value' field, and arrow 3 points to the 'Type' dropdown.

16)

----- Order to run the servers -----

Once finished the installation of OpenMeetings, the next time you run the servers, please do it in this order:

`sudo systemctl start mariadb.service`

..MariaDB data server

`sudo systemctl start podman.service`

...Podman, recipient of Kurento media server

`sudo podman start kms`

...Kurento media server

`sudo /etc/init.d/tomcat3 start`

...Tomcat-OpenMeetings

If you have some doubt or question, please expose it in Apache OpenMeetings forums:

<http://openmeetings.apache.org/mailling-lists.html>



Also you can download if you like, a wallpaper of OpenMeetings for different devices such as:

PC, Mac, Smartphone, iPhone and Tablets. Here is the link to download:

[OpenMeetings Wallpaper Download](#)

A dvd live iso with OpenMeetings 5.0.0 on Ubuntu 18.04 is at your disposal.

Can find it here:

[Live iso download](#)

Thank you.

Alvaro Bustos (PMC and Committer at Apache OpenMeetings).