

**This Guide is intended to help users install and  
configure Open Meetings 2.X**

**This guide is a variant of the Debian 64 Installation  
guide aimed at Ubuntu 12.04 users.**


**This guide has been written step by step with  
screenshots to aid in the successful build of OM.**

**SSL and Reverse proxy steps have been added but  
are optional.**


**N.B – When copying and pasting commands please  
check that symbols and character returns are  
correctly copied across.**

## Installing Ubuntu (Minimal Headless System)

## Step 1: - Base System

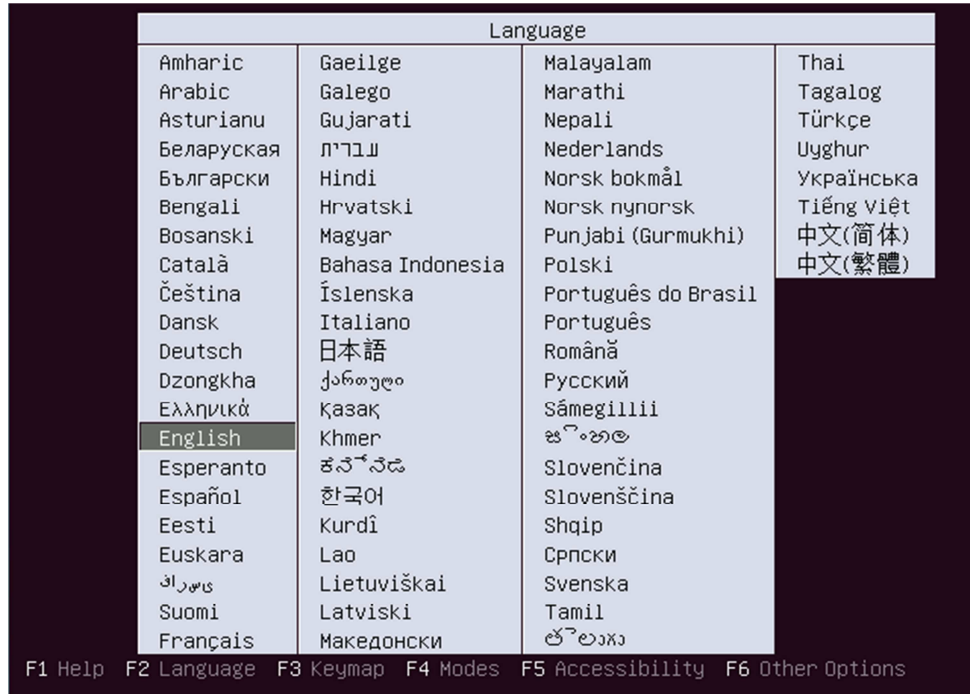


Choose “Install Ubuntu Server”

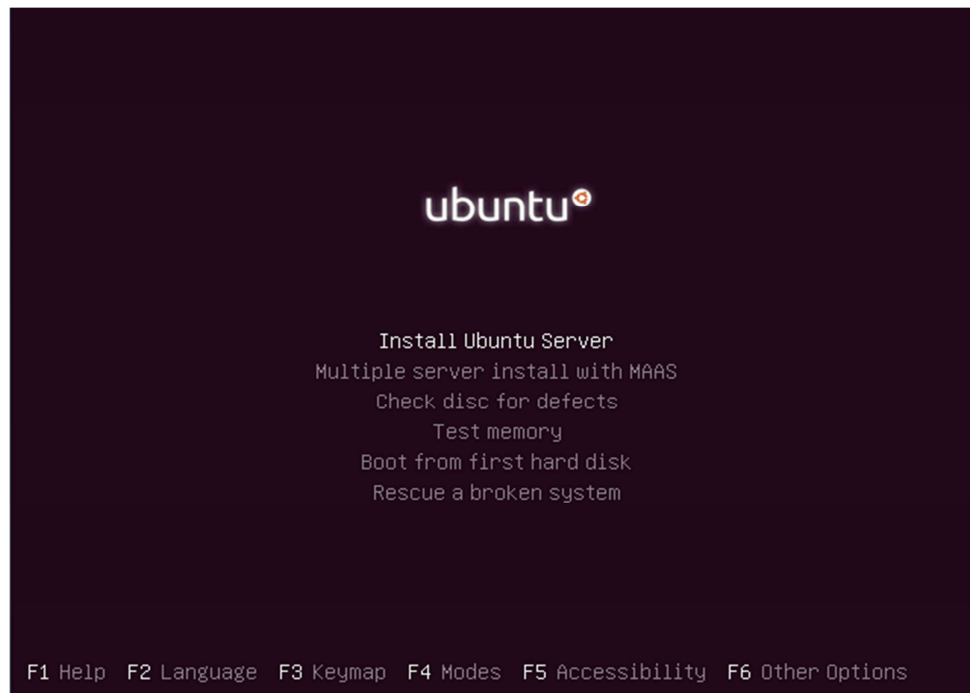


# OpenMeetings 2.X Installation on Ubuntu 64bit 12.04

Stephen Cottham  
Choose English


16/07/2012

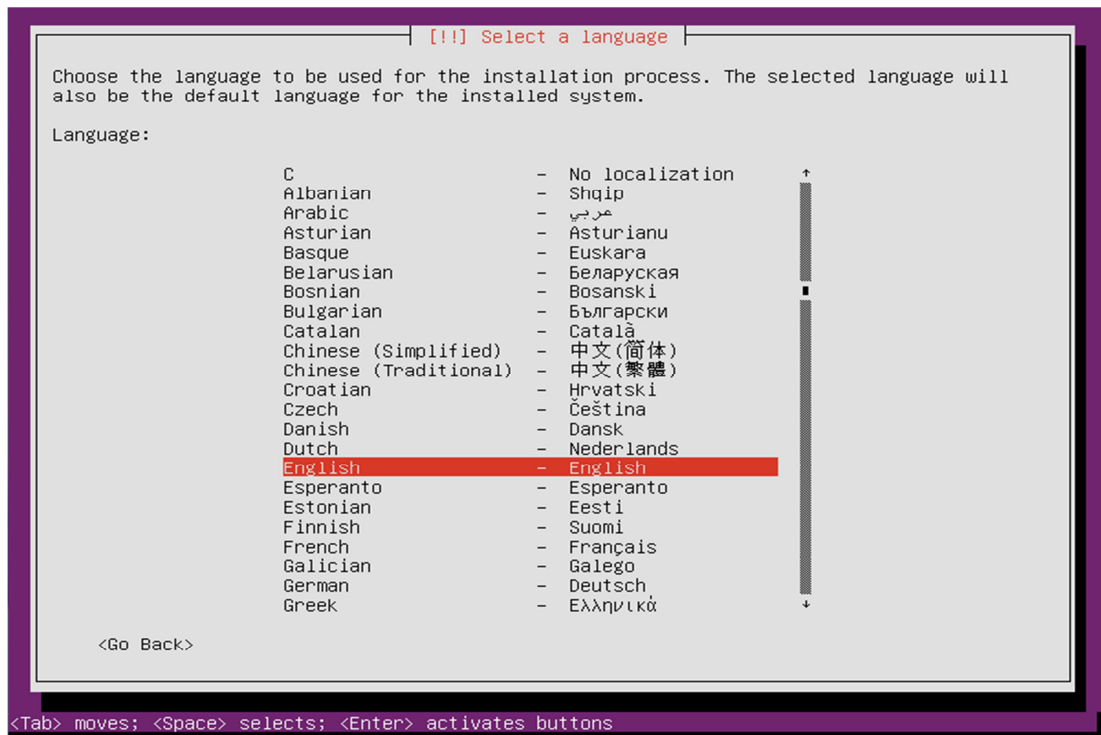


Choose "United Kingdom"

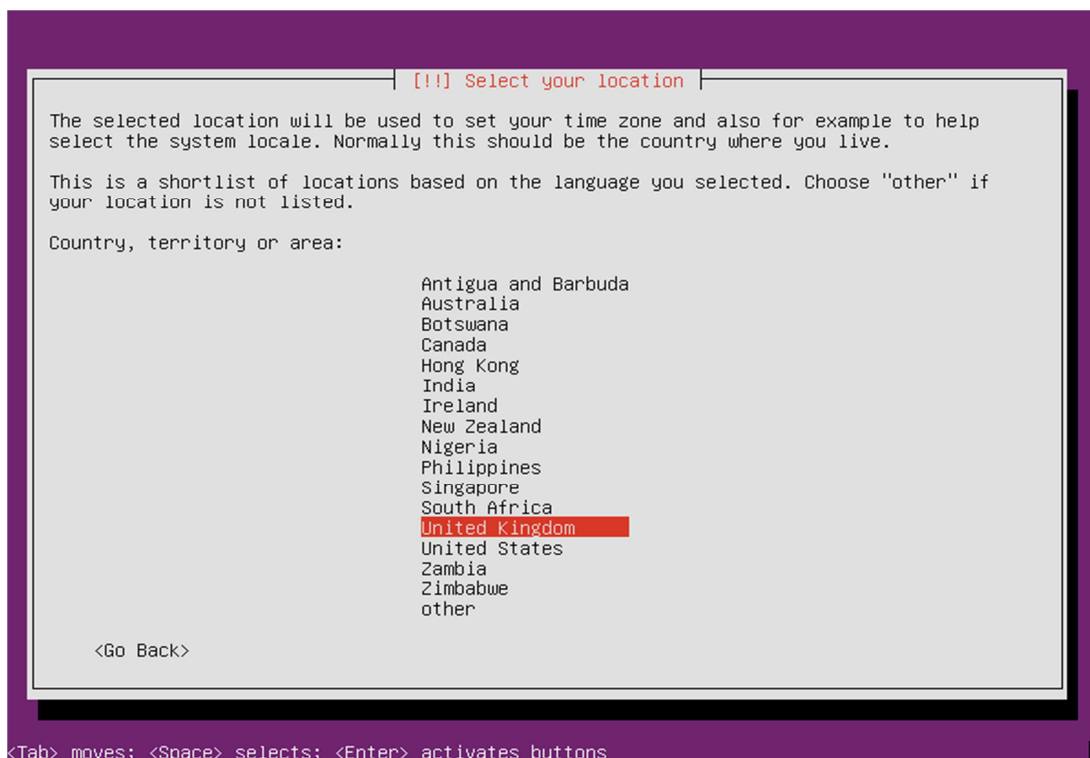


Choose yes to automatically detect keyboard.

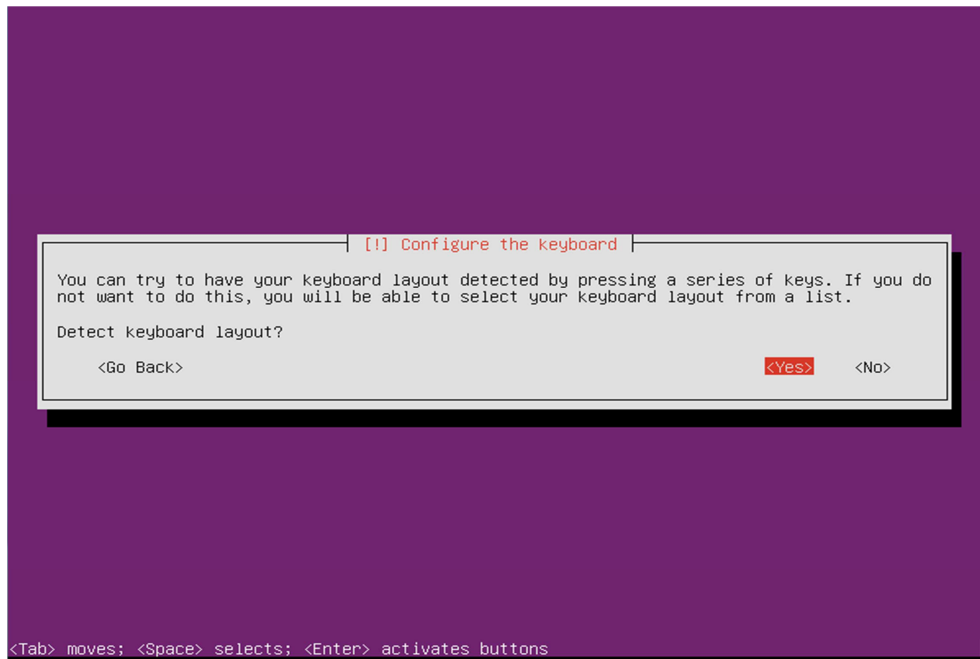


Enter a hostname.

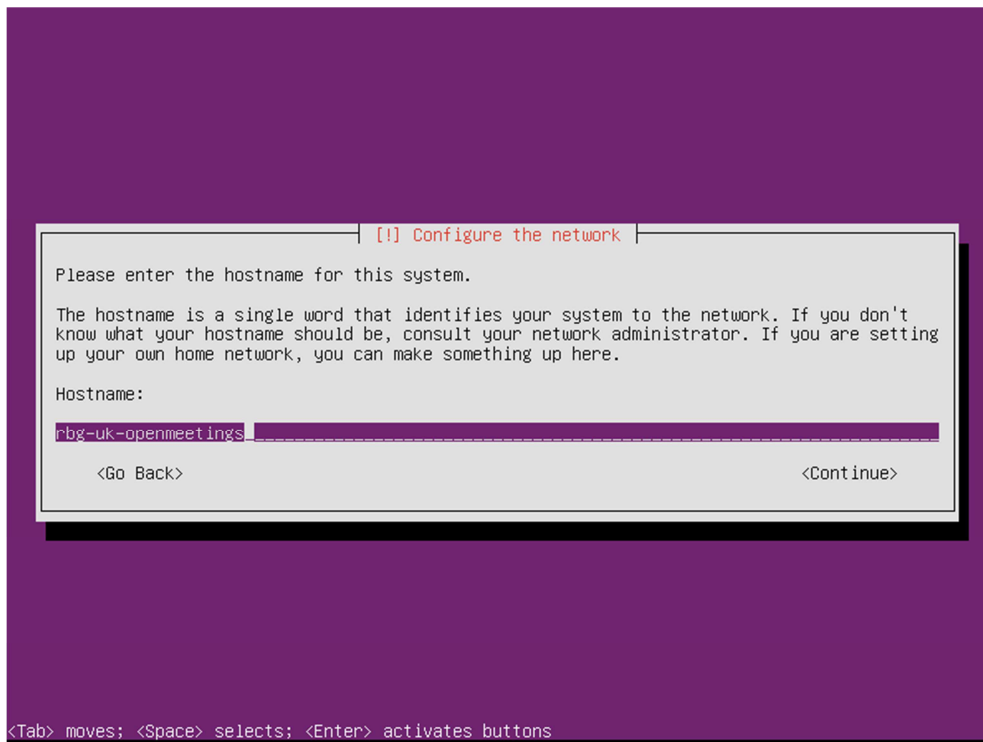


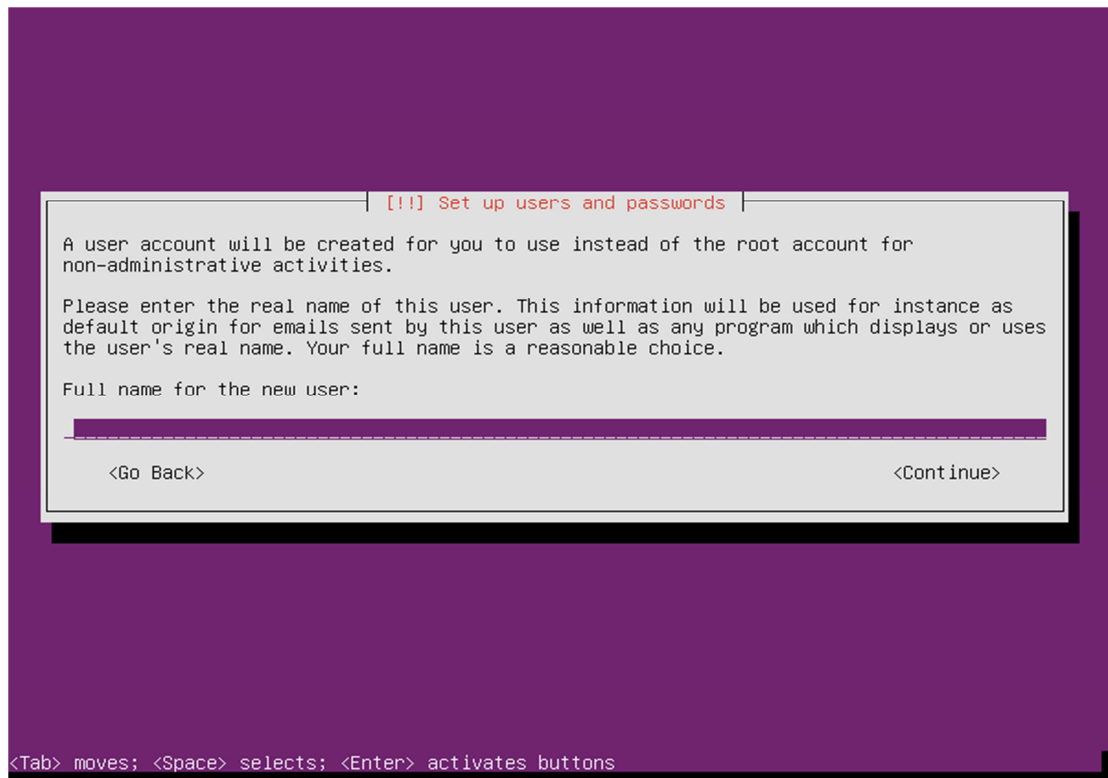


Enter a password for the new user.

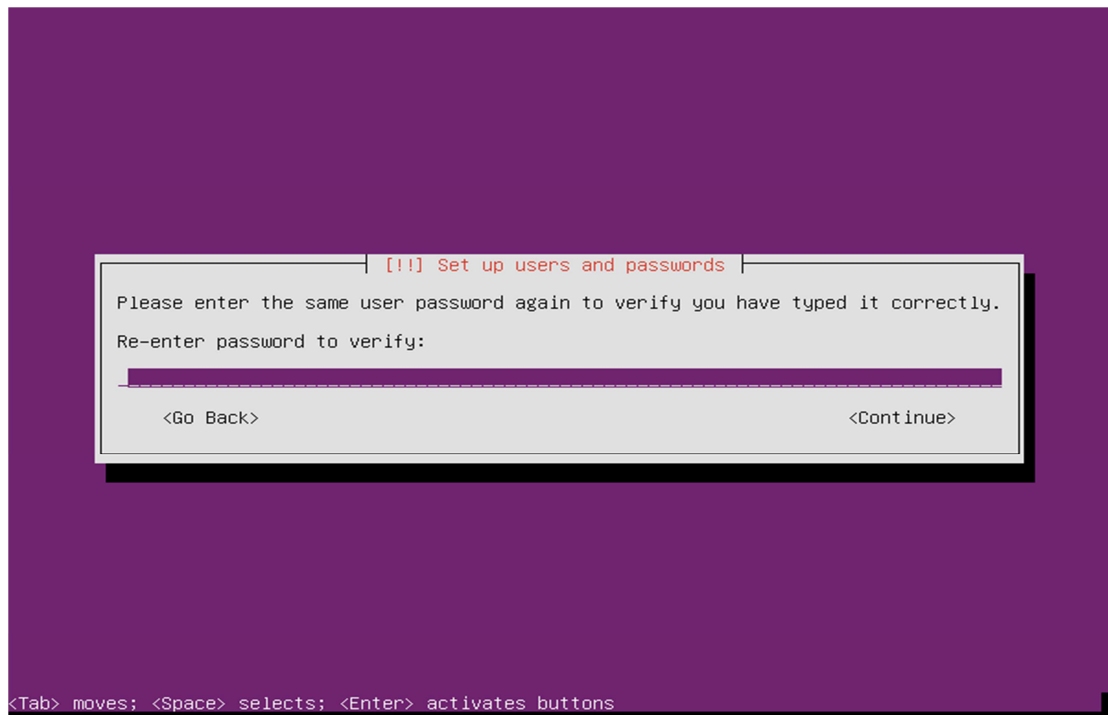


Choose no to encrypt the Home Directory.

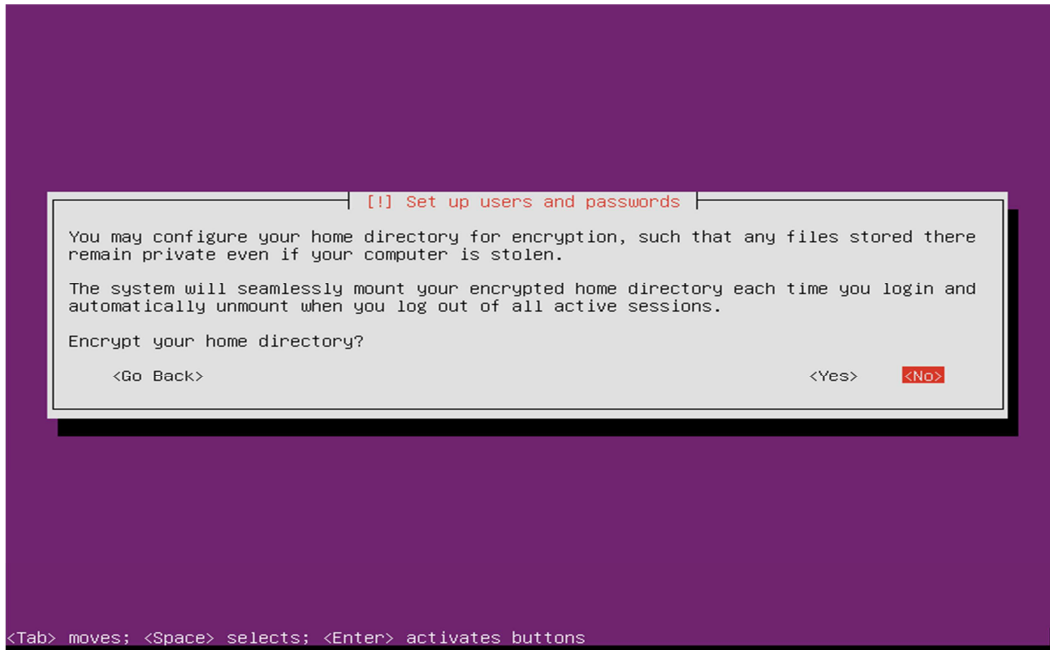


Choose yes to accept the detected time-zone.

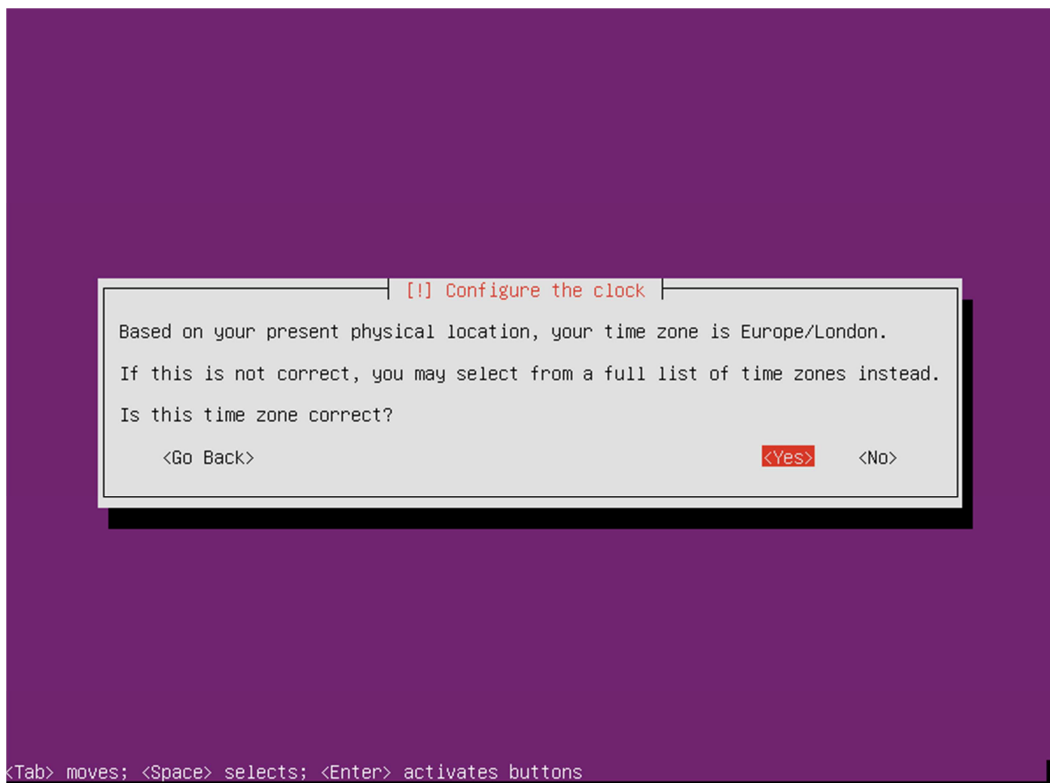


Accept the Disk selection to partition.

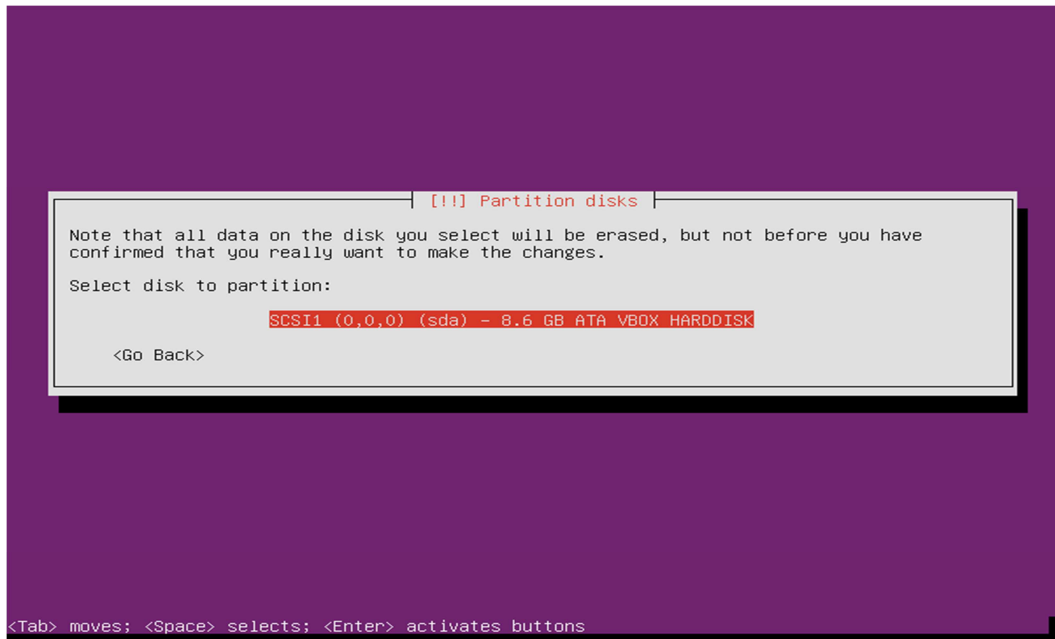


Select "Guided - Use entire disk"

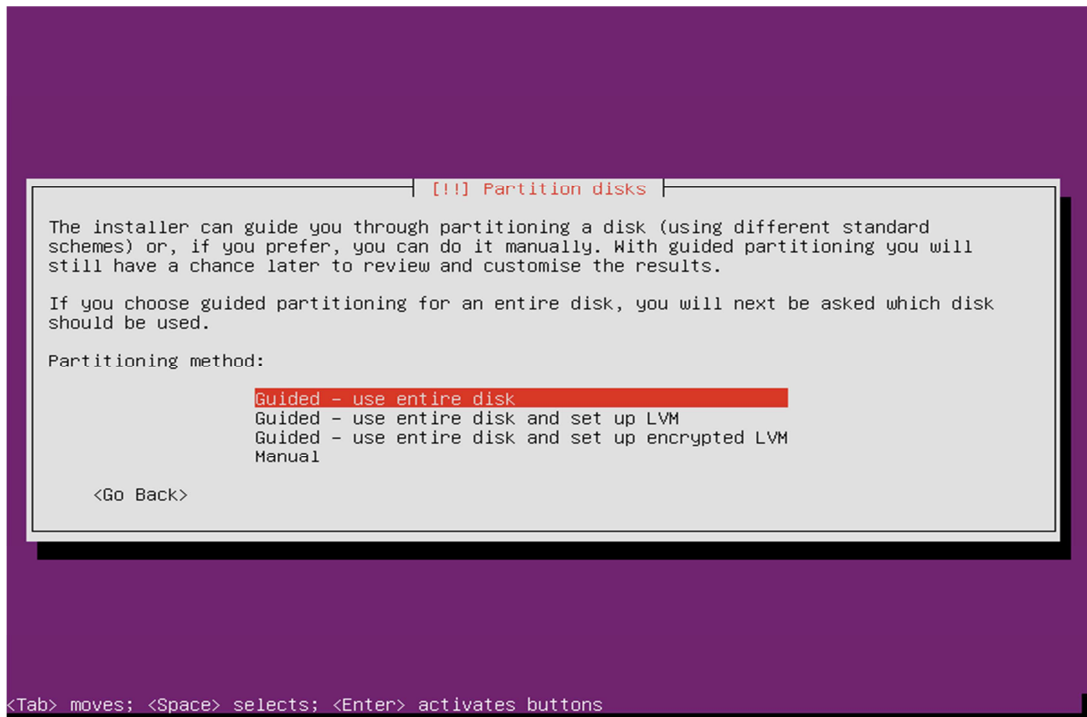

Choose "yes" to accept the changes to disk.

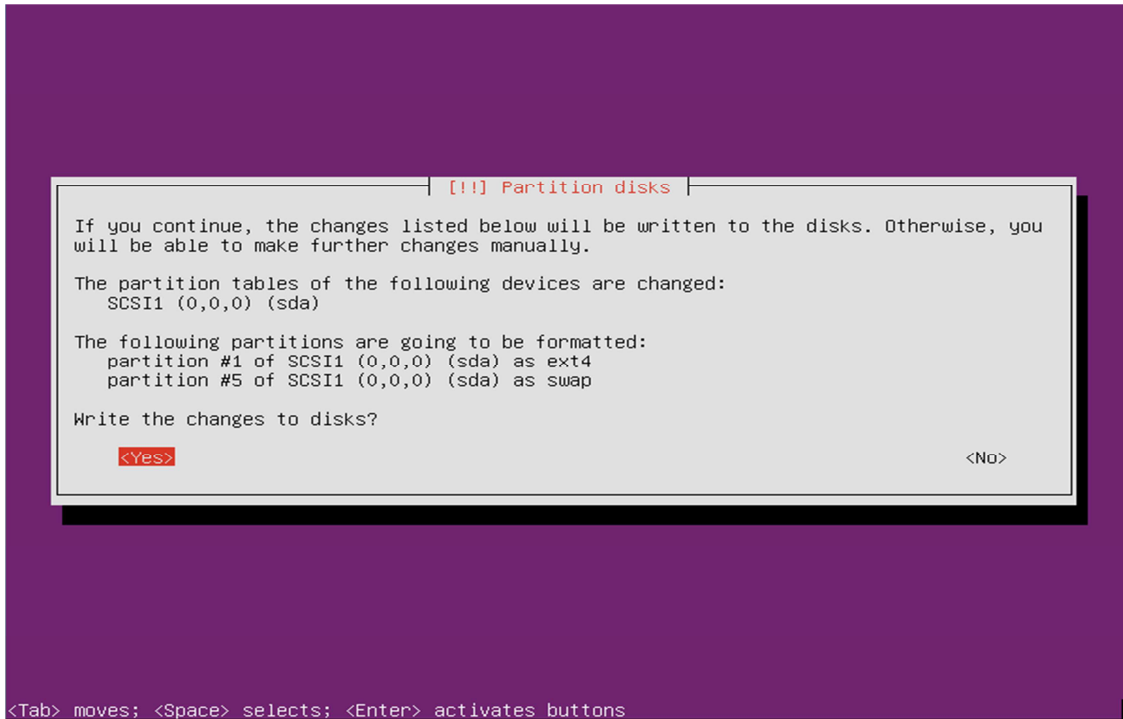


Select to install Security updates

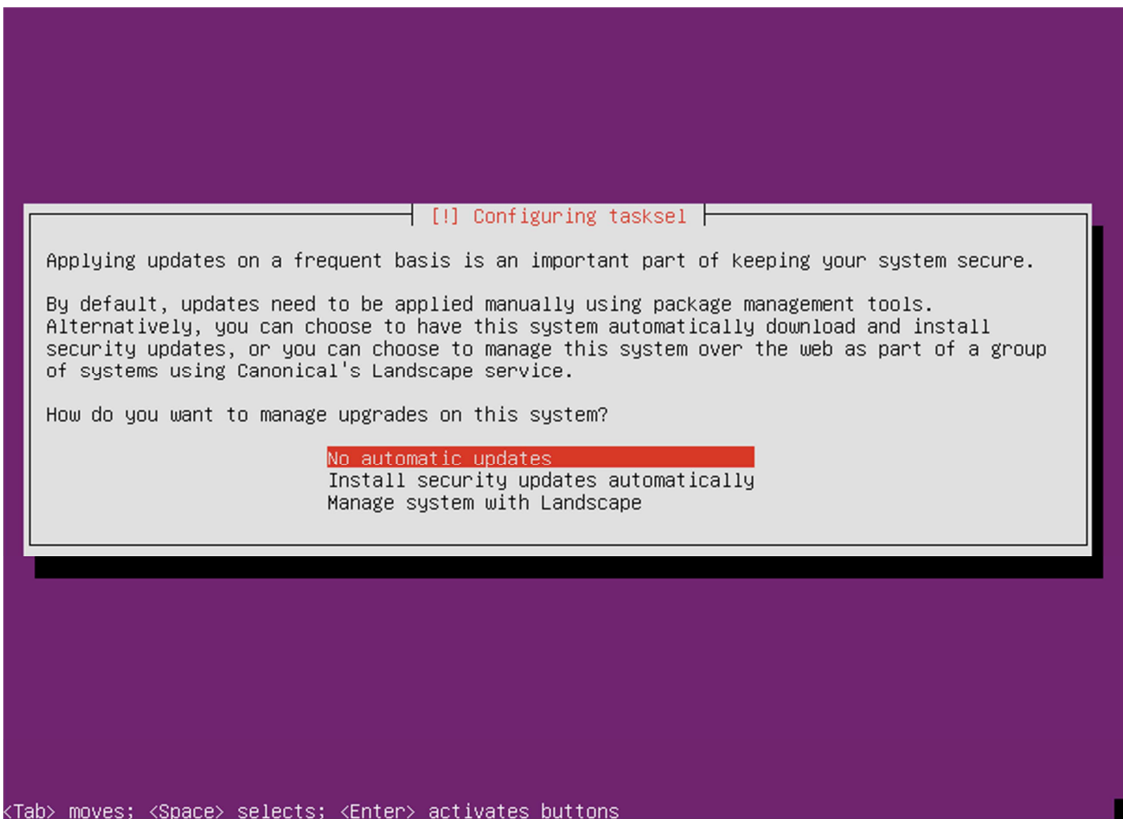




If you use a proxy server please enter that here, in most cases this is not needed and you can simply press enter to continue.

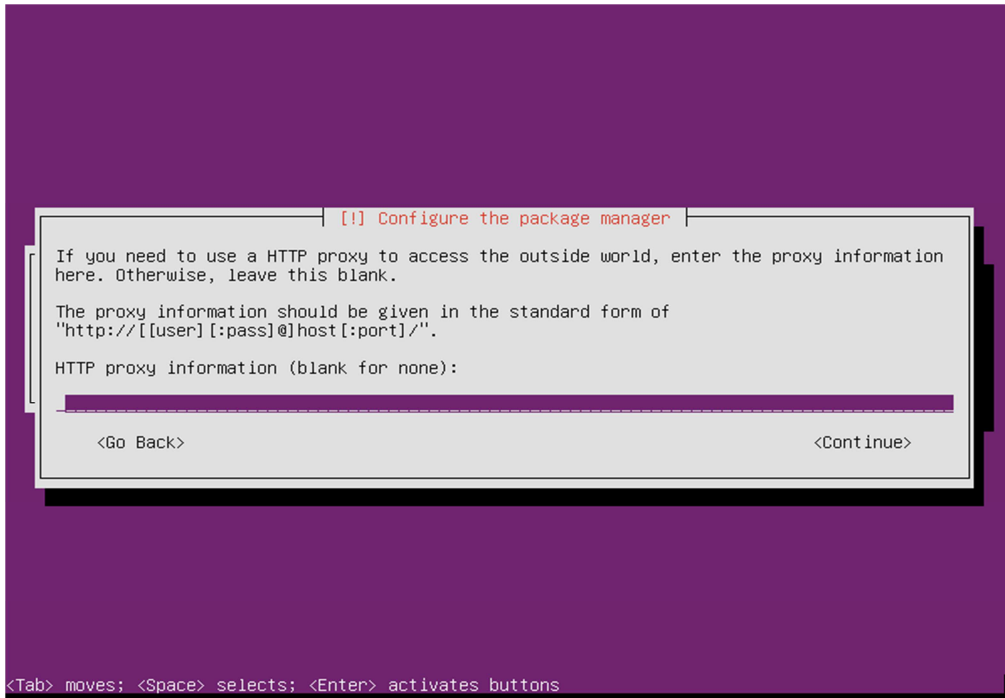

Select OpenSSH and leave the rest blank, then click on Continue.

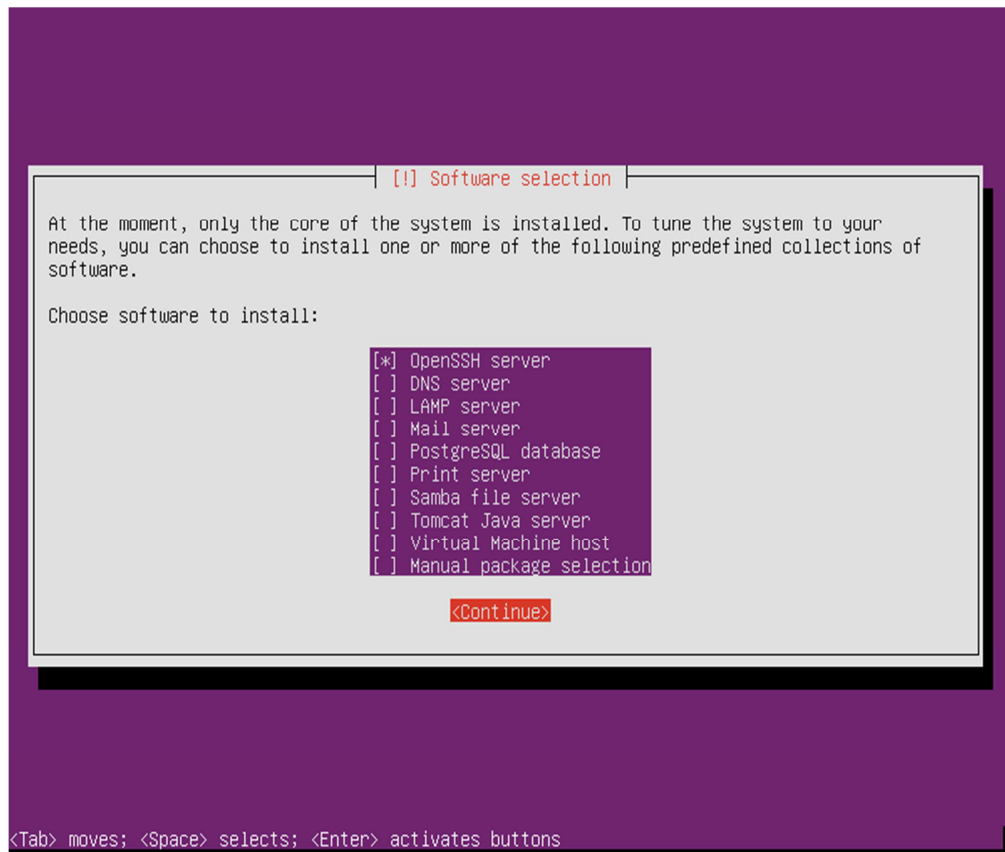


## OpenMeetings 2.X Installation on Ubuntu 64bit 12.04


Stephen Cottham

16/07/2012

Choose yes to install and configure the Grub Boot loader.

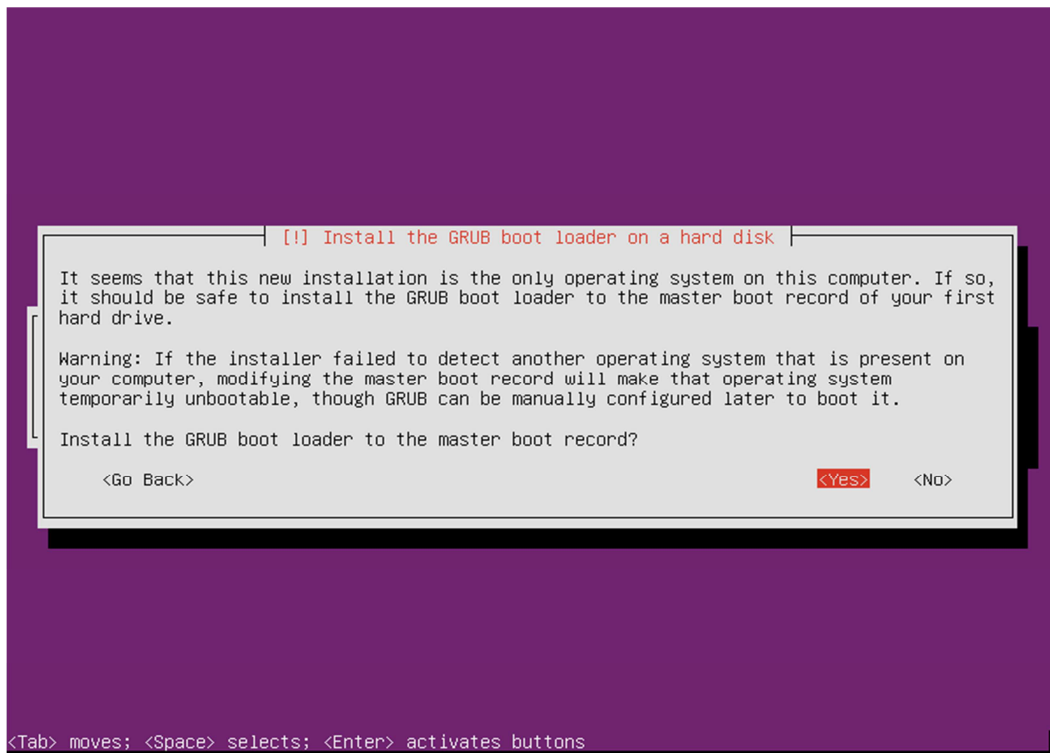

Press continue to reboot your system.

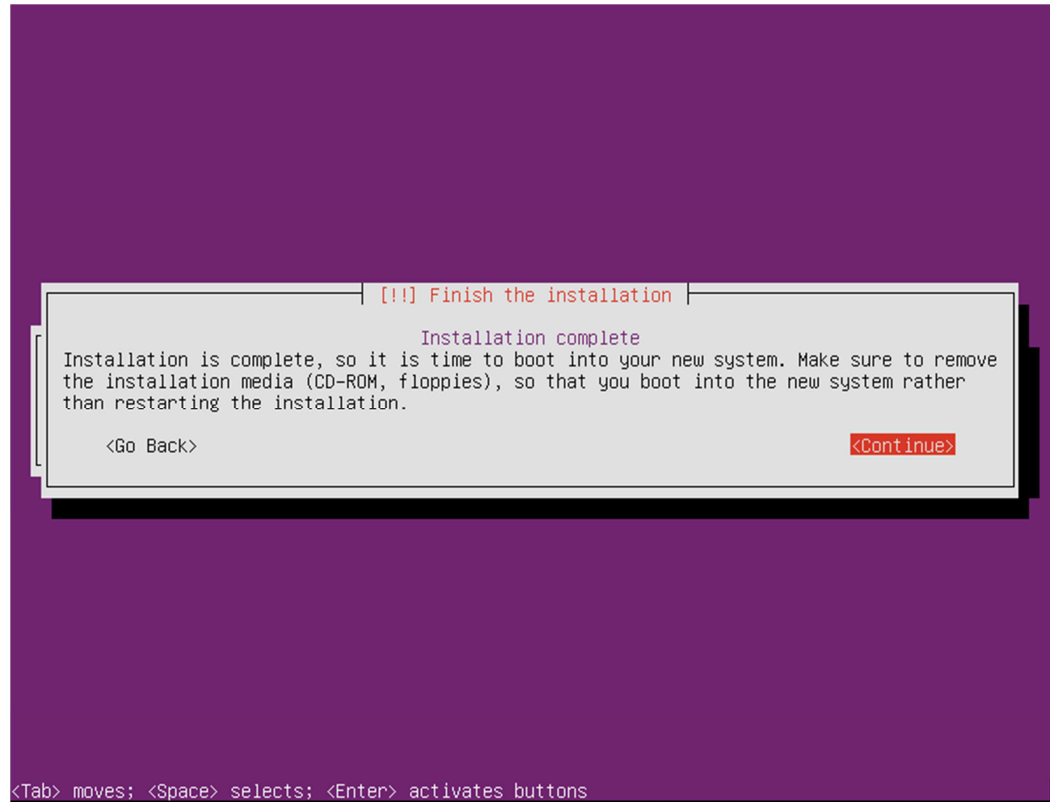


## Step 2: - Setup SSH Environment

You should now be at the following screen, the next steps are easier done from a remote desktop using an SSH client such as putty. – But first we need to know our IP address, in most cases this was issued by your DHCP server (unless you specified manual network setup during install) To find your IP address, first logon to your physical machine using root, then issue the following command:

### ifconfig

This will show the following screen:

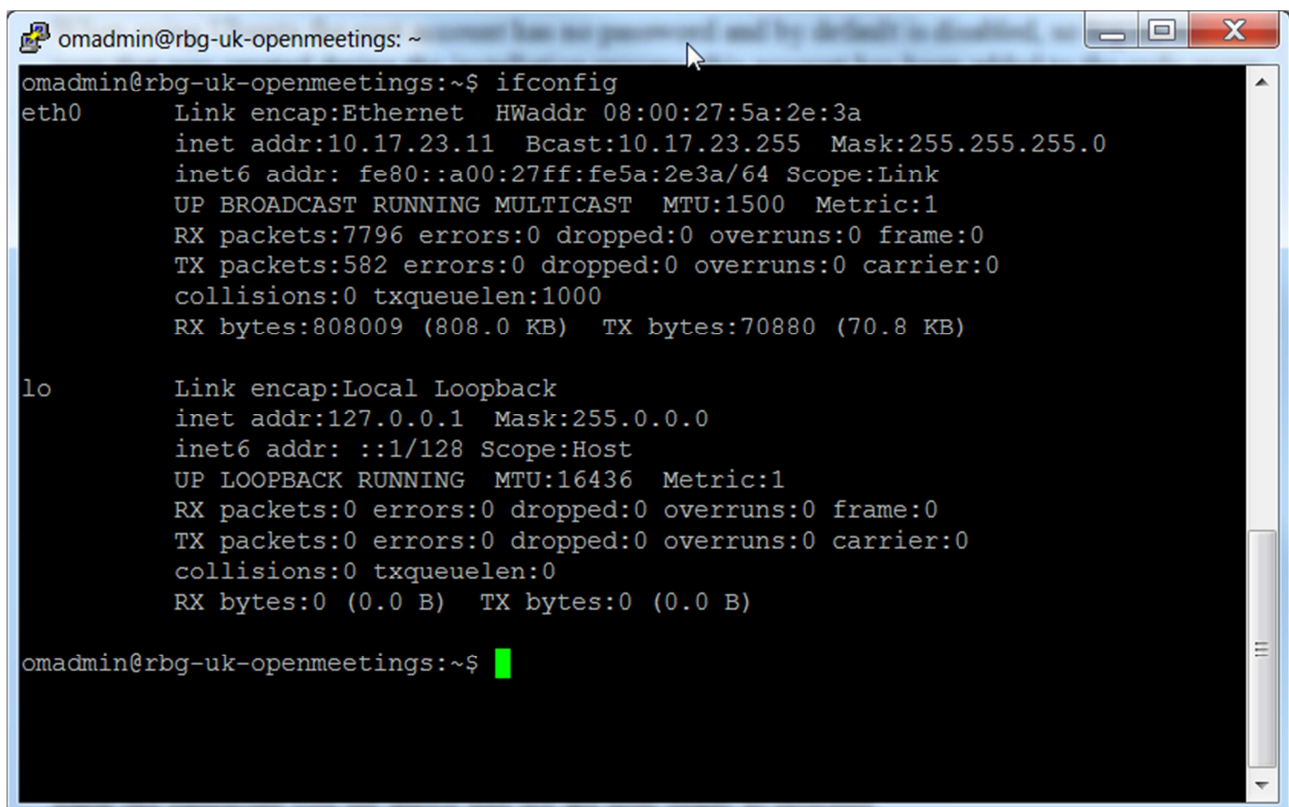

```
omadmin@rbg-uk-openmeetings: ~$ ifconfig
eth0      Link encap:Ethernet  HWaddr 08:00:27:5a:2e:3a
          inet addr:10.17.23.11  Bcast:10.17.23.255  Mask:255.255.255.0
          inet6 addr: fe80::a00:27ff:fe5a:2e3a/64 Scope:Link
          UP BROADCAST RUNNING MULTICAST  MTU:1500  Metric:1
          RX packets:7796 errors:0 dropped:0 overruns:0 frame:0
          TX packets:582 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:1000
          RX bytes:808009 (808.0 KB)  TX bytes:70880 (70.8 KB)

lo        Link encap:Local Loopback
          inet addr:127.0.0.1  Mask:255.0.0.0
          inet6 addr: ::1/128 Scope:Host
          UP LOOPBACK RUNNING  MTU:16436  Metric:1
          RX packets:0 errors:0 dropped:0 overruns:0 frame:0
          TX packets:0 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:0
          RX bytes:0 (0.0 B)  TX bytes:0 (0.0 B)


omadmin@rbg-uk-openmeetings:~$
```

You can see the IP Address in this case is 10.17.23.11 (Interface eth0)


You can now log off of the server.

From your desktop machine open your SSH client, in this case we will be using the putty client to connect to our new Server.


Enter the details and choose open

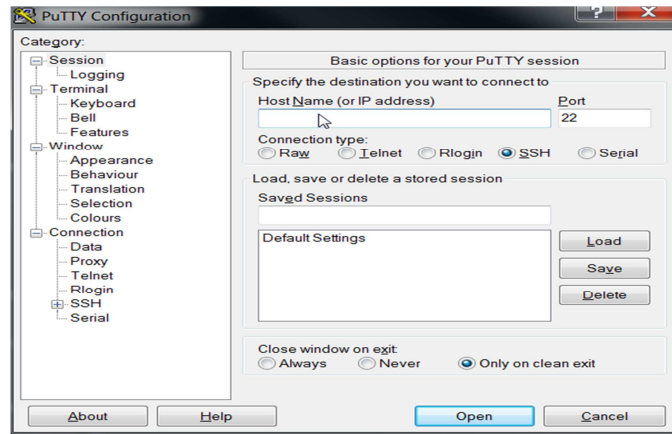

The first log on you will receive this message; you can choose yes here and accept the key.

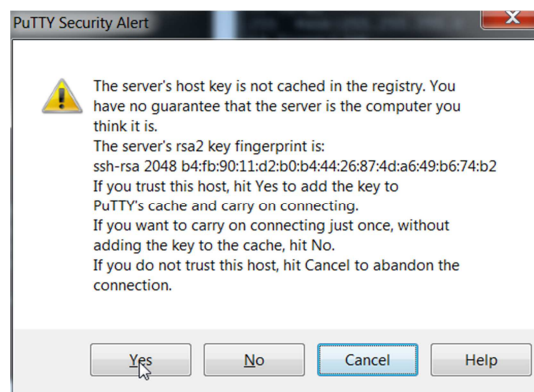

And finally this screen:

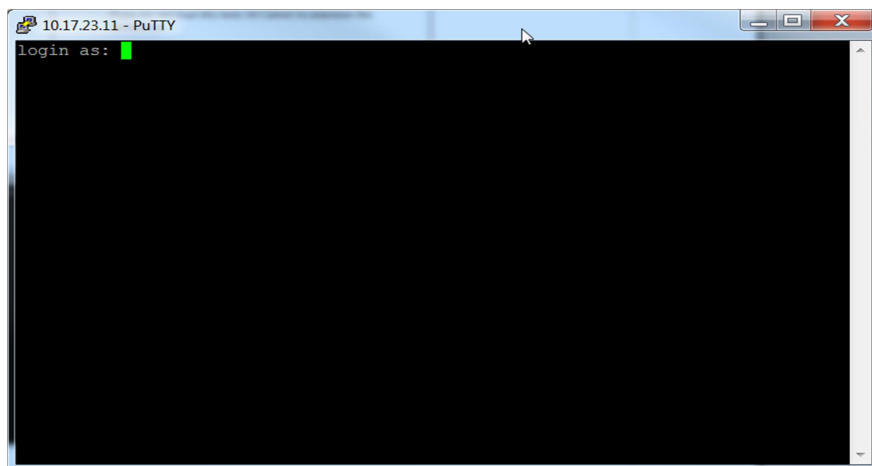

When using Ubuntu the root account has no password and by default is disabled, so first log on with the user that was created during the installation process (In this case omadmin), this account by default is part of the Admin group and therefore is also part of the sudoers group already, from here we can re-enable the root account.

To do this follow these steps

**sudo passwd**

Enter the oadmin password first

```
[sudo] password for oadmin: xxxxxx
```

Then enter the new root password twice

```
Enter new UNIX password:  
Retype new UNIX password:  
passwd: password updated successfully
```

We can now enter the following to change user to root

```
su -
```

Enter the password you set above and we are now ready to proceed.

### Step 3: Install Dependent software

First update the repos:

```
apt-get update
```

Now lets create our work area

```
mkdir -p /usr/adm
```

To install Java 6 JDK first we need to grab the relevant binary from oracle.

```
cd /usr/adm
```

```
wget --no-cookies --header "Cookie: gpw_e24=http%3A%2F%2Fwww.oracle.com%2F" \  
http://download.oracle.com/otn-pub/java/jdk/6u32-b05/jdk-6u32-linux-x64.bin
```

Now issue the following to install.

```
cd /usr/adm  
chmod +x jdk-6u32-linux-x64.bin  
./jdk-6u32-linux-x64.bin  
mkdir -p /usr/lib/jvm  
mv jdk1.6.0_32 /usr/lib/jvm/
```

```
update-alternatives --install /usr/bin/javac javac /usr/lib/jvm/jdk1.6.0_32/bin/javac 1  
update-alternatives --install /usr/bin/java java /usr/lib/jvm/jdk1.6.0_32/bin/java 1  
update-alternatives --install /usr/bin/javaws javaws /usr/lib/jvm/jdk1.6.0_32/bin/javaws 1
```

```
update-alternatives --config javac  
update-alternatives --config java  
update-alternatives --config javaws
```

Check java by issuing the following

**java -version**

```
java version "1.6.0_32"
```

```
Java(TM) SE Runtime Environment (build 1.6.0_32-b05)  
Java HotSpot(TM) 64-Bit Server VM (build 20.7-b02, mixed mode)
```

**ls -la /etc/alternatives/java\***

and confirm the symbolic links point to the correct location.

Now let's install some more dependencies:

```
apt-get install openoffice.org-writer openoffice.org-calc openoffice.org-impres \  
openoffice.org-draw openoffice.org-math imagemagick sox -y
```

```
apt-get install libgif-dev xpdf libfreetype6 libfreetype6-dev libjpeg62 libjpeg8 \  
libjpeg8-dev libjpeg-dev libdirectfb-dev -y
```

```
apt-get install libart-2.0-2 libt1-5 zip unzip bzip2 subversion git-core checkinstall \  
yasm texi2html libfaac-dev libfaad-dev libmp3lame-dev libsdl1.2-dev libx11-dev \  
libxfixes-dev libxvidcore-dev zlib1g-dev libogg-dev sox libvorbis0a libvorbis-dev \  
libgsm1 libgsm1-dev libfaad2 flvtool2 lame -y
```

**Step 4: Compile and Install SWFTTools 2012-04-08-0857**

```
cd /usr/adm  
wget http://www.swftools.org/swftools-2012-04-08-0857.tar.gz  
tar -zxvf swftools-2012-04-08-0857.tar.gz  
cd swftools-2012-04-08-0857  
./configure  
make  
make install
```

Once that has completed you can now test it by issuing the following:

**pdf2swf --version**

Which should give you the following output:

```
pdf2swf - part of swftools 2012-04-08-0857
```

### Step 5: Compile and Install ffmpeg 0.11.1

Let's go back to our temporary working area

```
cd /usr/adm
```

Download, compile and install ffmpeg by issuing these commands:

```
wget http://ffmpeg.org/releases/ffmpeg-0.11.1.tar.gz
tar -zxvf ffmpeg-0.11.1.tar.gz
cd ffmpeg-0.11.1
./configure --enable-libmp3lame --enable-libxvid --enable-libvorbis \
--enable-libgsm --enable-libfaac --enable-gpl --enable-nonfree
make
checkinstall
```

**N.B - You will be asked a series of question towards the end of the install, press return for each to continue.**

Once that has completed you can now test it by issuing the following:

```
ffmpeg -version
```

Which should give you the following output:

```
ffmpeg version 0.11.1
```

### Step 6: - Create mysql DB for OM


Now we need to install MYSQL, issue this command (In this case username and password are openmeetings : ompassword)

```
apt-get install mysql-server -y
```

## OpenMeetings 2.X Installation on Ubuntu 64bit 12.04

Stephen Cottham


16/07/2012

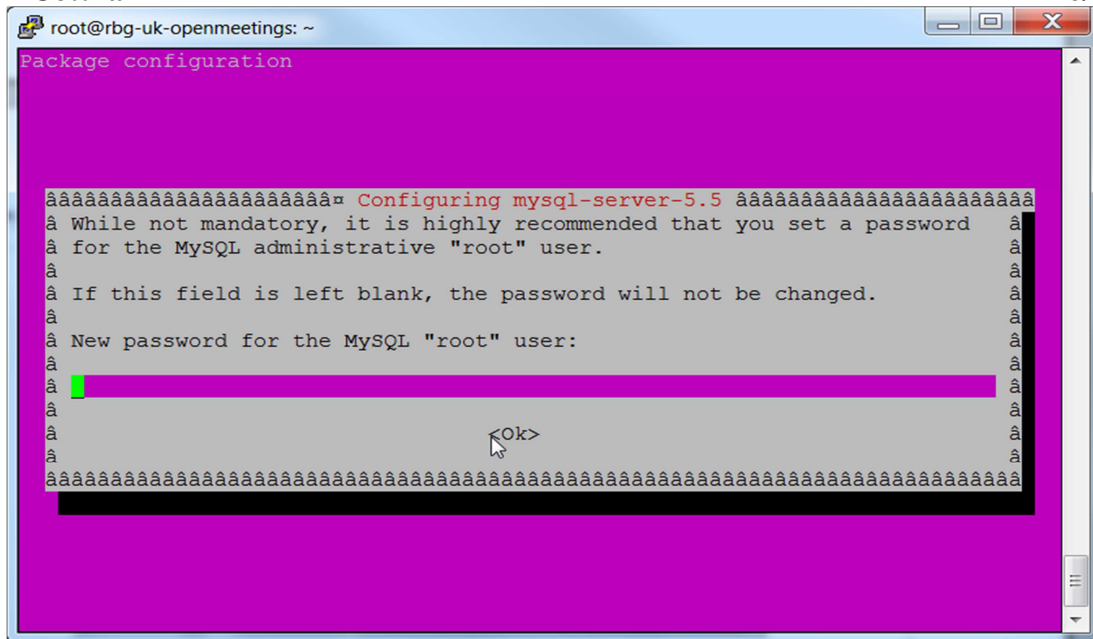

Enter the password as before “ompassword” and choose ok.  
Now let’s create the needed DB’s for OM 2.x

Issue these commands:

**mysql -u root -p**

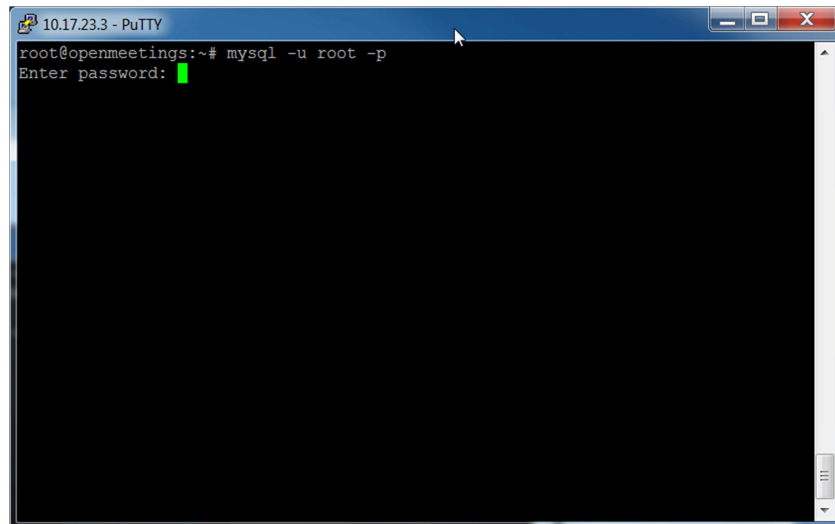

Enter password “**ompassword**”

Now issue these: (Assuming username **openmeeting** and password = **password**)


```
CREATE DATABASE openmeetings DEFAULT CHARACTER SET 'utf8';  
GRANT ALL PRIVILEGES ON openmeetings.* TO 'openmeetings'@'localhost'  
IDENTIFIED BY 'password' WITH GRANT OPTION;  
quit
```



## OpenMeetings 2.X Installation on Ubuntu 64bit 12.04

Stephen Cottham

16/07/2012

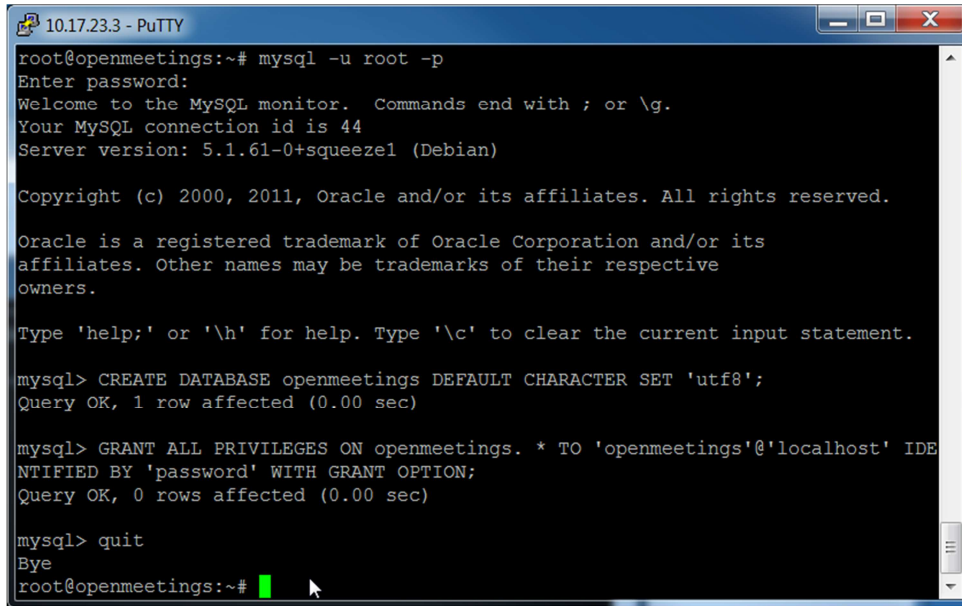A screenshot of a PuTTY terminal window titled "10.17.23.3 - PuTTY". The terminal shows a root user at an "openmeetings" machine running the command "mysql -u root -p". The MySQL prompt appears, and the user enters a password. The terminal displays the MySQL welcome message, including the server version "5.1.61-0+squeeze1 (Debian)". The user then runs "CREATE DATABASE openmeetings DEFAULT CHARACTER SET 'utf8';", which returns "Query OK, 1 row affected (0.00 sec)". Next, the user runs "GRANT ALL PRIVILEGES ON openmeetings.\* TO 'openmeetings'@'localhost' IDENTIFIED BY 'password' WITH GRANT OPTION;", which returns "Query OK, 0 rows affected (0.00 sec)". Finally, the user runs "quit", and the terminal shows "Bye" and returns to the root prompt "root@openmeetings:~#".

```
10.17.23.3 - PuTTY
root@openmeetings:~# mysql -u root -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 44
Server version: 5.1.61-0+squeeze1 (Debian)

Copyright (c) 2000, 2011, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> CREATE DATABASE openmeetings DEFAULT CHARACTER SET 'utf8';
Query OK, 1 row affected (0.00 sec)

mysql> GRANT ALL PRIVILEGES ON openmeetings.* TO 'openmeetings'@'localhost' IDENTIFIED BY 'password' WITH GRANT OPTION;
Query OK, 0 rows affected (0.00 sec)

mysql> quit
Bye
root@openmeetings:~#
```

Successful DB creation shown above.

### Step 7: Install JOD Converter

Let's go back to our temporary working area

```
cd /usr/adm
```

Download, extract JOD by issuing these commands: **(We will move the JOD location after the installation of OM 2.x)**

```
wget http://jodconverter.googlecode.com/files/jodconverter-core-3.0-beta-4-dist.zip
unzip jodconverter-core-3.0-beta-4-dist.zip
```

### Step 8: Install ANT 1.8.4 for compiling latest OM 2.x

Let's go back to our temporary working area

```
cd /usr/adm
```

Download, extract ANT by issuing these commands:

```
wget http://mirror.catn.com/pub/apache//ant/binaries/apache-ant-1.8.4-bin.tar.gz
tar -zxvf apache-ant-1.8.4-bin.tar.gz
```

Once that has completed you can test it by issuing the following commands:

```
cd /usr/adm/apache-ant-1.8.4/bin
./ant -version
```

This should output the following:

```
Apache Ant(TM) version 1.8.4 compiled on May 22 2012
```

### Step 9: Download and compile latest OM 2.x

Again back to our working area:

```
cd /usr/adm
```

Then check out the latest source code using the following:

```
svn checkout http://svn.apache.org/repos/asf/incubator/openmeetings/branches/2.0/
```

Once that has completed we can then build the source by issuing the following:

```
cd /usr/adm/2.0
/usr/adm/apache-ant-1.8.4/bin/ant clean.all
/usr/adm/apache-ant-1.8.4/bin/ant -Ddb=mysql
```

This will take a little while depending on your system, once it has finished you should be left the following message:

```
BUILD SUCCESSFUL
```

### Step 9a: Install pre-built OM 2.x (Alternative to Step 9)

Download the latest build from the following link:

<https://builds.apache.org/job/openmeetings/>

The file will be something like the following “apache-openmeetings-incubating-2.xxxxx.tar.gz: (Where xxx is the date and build version)

We can do this using wget, so first we need to go back to our build area like so:

```
cd /usr/adm
mkdir -p singlewebapp/dist
cd singlewebapp/dist
```

Then grab the file and extract it:

```
wget https://builds.apache.org/job/openmeetings/lastSuccessfulBuild/artifact/singlewebapp/dist/apache-openmeetings-incubating-2.xxxxx.tar.gz
```

```
tar -zxvf apache-openmeetings-incubating-2.xxxxx.tar.gz
```

Now download the mysql connector from here:

```
http://www.mysql.com/downloads/connector/j/
```

```
cd /usr/adm/singlewebapp/dist/red5/webapps/openmeetings/WEB_INF/lib
```

```
wget http://www.mysql.com/get/Downloads/Connector-J/mysql-connector-java-5.1.20.zip/from/http://mirrors.ukfast.co.uk/sites/ftp.mysql.com/
```

```
unzip mysql-connector-java-5.1.20.zip
```

```
cd mysql-connector-java-5.1.20
```

```
mv mysql-connector-java-5.1.20-bin.jar  
/usr/adm/singlewebapp/dist/red5/webapps/openmeetings/WEB_INF/lib
```

### Step 10: Install compiled\Pre-Built OM 2.x

Now we need to move the compiled source into the correct location, in this system we are using /usr/lib/red5, so issue the following commands to move the root folder over:

```
cd /usr/adm/2.0/dist  
mv red5/ /usr/lib/
```

Let's move the JOD into place now

```
cp -R /usr/adm/jodconverter-core-3.0-beta-4 /usr/lib/red5/webapps/openmeetings
```

And set some permissions and ownerships

```
chown -R nobody /usr/lib/red5  
chmod +x /usr/lib/red5/red5.sh  
chmod +x /usr/lib/red5/red5-debug.sh
```

Set the start-up script for OM 2.x by issuing the following:

```
vi /etc/init.d/red5
```

and adding the following:

```
#!/bin/sh  
### BEGIN INIT INFO  
# Provides:      red5  
# Required-Start: $remote_fs $syslog  
# Required-Stop: $remote_fs $syslog  
# Default-Start: 2 3 4 5  
# Default-Stop:  0 1 6
```

Stephen Cottham

```

# Short-Description: Starts red5 server for Openmeetings.
### END INIT INFO
# For RedHat and cousins:
# chkconfig: 2345 85 85
# description: Red5 flash streaming server
# processname: red5
# Created By: Sohail Riaz (sohaileo@gmail.com)
# Modified by Alvaro Bustos
PROG=red5
RED5_HOME=/usr/lib/red5
DAEMON=$RED5_HOME/$PROG.sh
PIDFILE=/var/run/$PROG.pid
# Source function library
# . /etc/rc.d/init.d/functions
[ -r /etc/sysconfig/red5 ] && . /etc/sysconfig/red5
RETVAL=0
case "$1" in
start)
    cd $RED5_HOME
    start-stop-daemon --start -c nobody --pidfile $PIDFILE --chdir $RED5_HOME --
background --make-pidfile --exec $DAEMON >/dev/null 2>/dev/null &
    RETVAL=$?
    if [ $RETVAL -eq 0 ]; then
        echo $! > $PIDFILE
        # touch /var/lock/subsys/$PROG
    fi
    # [ $RETVAL -eq 0 ] && success "$PROG startup" || failure "$PROG startup"
    echo
;;
stop)
# no longer required as JOD does runs office when it needs to      pkill soffice.bin
    start-stop-daemon --stop --quiet --pidfile $PIDFILE \
        --name java
    rm -f $PIDFILE
    echo
    [ $RETVAL -eq 0 ] && rm -f /var/lock/subsys/$PROG
;;
restart)
    $0 stop
    $0 start
;;
status)
    # status $PROG -p $PIDFILE
# no longer required as JOD does runs office when it needs to      netstat -anp | grep
soffice | grep 8100 &> /dev/nul && echo "OpenOffice server is running" || echo
"$OpenOffice server is not running"
    #ps aux | grep -f $PIDFILE &> /dev/nul && echo "$PROG is running" || echo
"$PROG is not running"
    start-stop-daemon --status --pidfile $PIDFILE
    RETVAL=$?
    [ $RETVAL -eq 0 ] && echo "$PROG is running"
    [ $RETVAL -eq 1 ] && echo "$PROG is not running and the pid file exists"

```

## OpenMeetings 2.X Installation on Ubuntu 64bit 12.04

Stephen Cottham

16/07/2012

```
[ $RETVAL -eq 3 ] && echo "$$PROG is not running"
[ $RETVAL -eq 4 ] && echo "$$PROG - unable to determine status"
;;
checkports)
    netstat -anp | grep soffice
    netstat -anp | grep java
;;
*)
    echo "$Usage: $0 {start|stop|restart|status|checkports}"
    RETVAL=1
esac
exit $RETVAL
```

Save the file and then set the permissions like below:

```
chmod +x /etc/init.d/red5
update-rc.d red5 defaults
```

Now we need to move the persistence files so we can connect to mysql, so issue the following:

Make backup copy

```
mv /usr/lib/red5/webapps/openmeetings/WEB-INF/classes/META-INF/
persistence.xml /usr/lib/red5/webapps/openmeetings/WEB-INF/
classes/META-INF/persistence.xml-ori
```

Rename mysql template to persistence.xml

```
mv /usr/lib/red5/webapps/openmeetings/WEB-INF/classes/META-INF/
mysql_persistence.xml /usr/lib/red5/webapps/openmeetings/WEB-INF/
classes/META-INF/persistence.xml
```

Edit the persistence file and add out mysql details, in this case we used “**openmeetings**” and “**password**” – so issue the following:

```
vi /usr/lib/red5/webapps/openmeetings/WEB-INF/classes/META-INF/persistence.xml
```

Then change the following

```
, Username=openmeetings
, Password=password"/>
```


At this stage we are ready to start up OM 2.x for the first time.

```
/etc/init.d/red5 start
```

Now open the browser and go to the following link. **N.B remember to change the IP address to your OM2.x server, the one below 10.17.23.11 is just for this example.**

**<http://10.17.23.11:5080/openmeetings/install>**

**If all went well you should now see this page:**

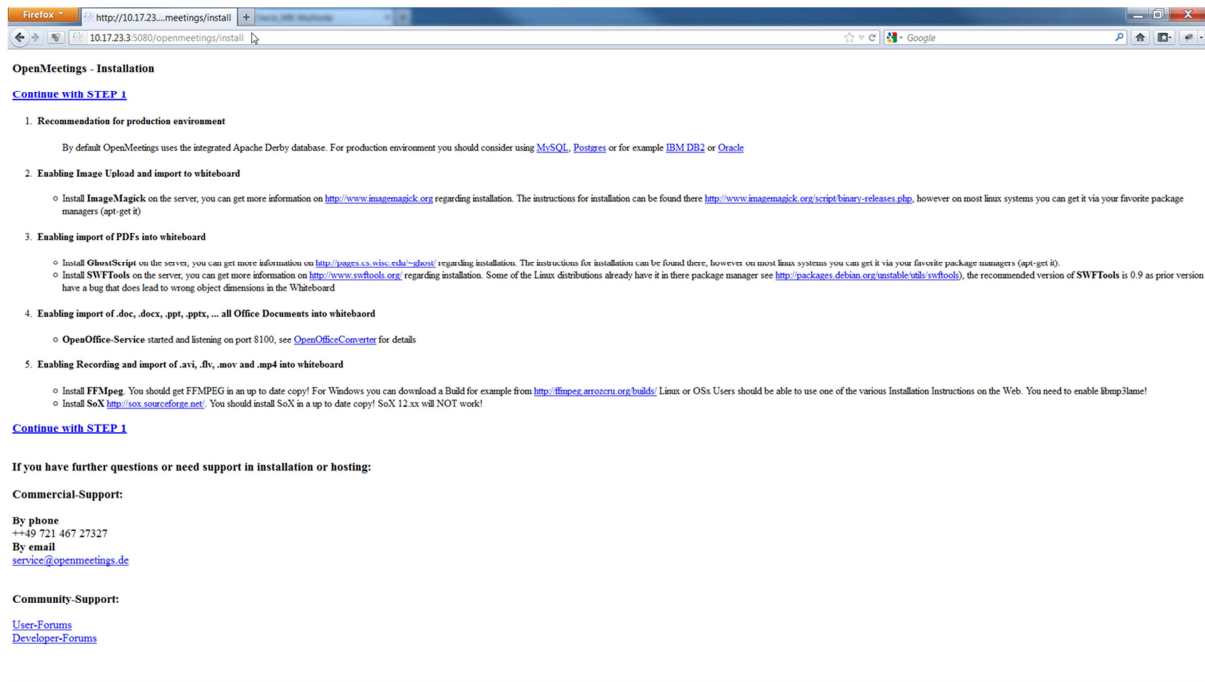

Choose the “Continue with STEP 1” link

## OpenMeetings - Installation

<b>Userdata</b>	
Username	<input type="text"/>
Userpass	<input type="text"/>
E-Mail	<input type="text"/>
User Time Zone	<input type="text" value="New Zealand (Etc/GMT+12 (New Zealand))"/>
<b>Organisation(Domains)</b>	
Name	<input type="text"/>
<b>Configuration</b>	
Allow self-registering (allow_frontend_register)	<input type="text" value="Yes"/>
Send Email to new registered Users (sendEmailAtRegister)	<input type="text" value="Yes"/>
New Users need to verify their E-Mail (sendEmailWithVerificationCode)	<input type="text" value="Yes"/>
Default Rooms of all types will be created	<input type="text" value="Yes"/>
Mail-Referer (system_email_addr)	<input type="text" value="noreply@localhost"/>
SMTP-Server (smtp_server)	<input type="text" value="localhost"/>
SMTP-Server Port(default Smtip-Server Port is 25) (smtp_port)	<input type="text" value="25"/>
SMTP-Username (email_userpass)	<input type="text"/>
SMTP-Userpass (email_userpass)	<input type="text"/>
Enable TLS in Mail Server Auth	<input type="text" value="No"/>
Set inviter's email address as ReplyTo in email invitations (inviter.email.as.replyto)	<input type="text" value="Yes"/>
Default Language	<input type="text" value="english"/>

The only section we need to fill out at this stage is the following:

Username: **omadmin**  
 Userpass: **ompassword**  
 Email: **something@something.com**  
 TimeZone: **United Kingdom**  
 Domain Name: **somedomain**

## OpenMeetings 2.X Installation on Ubuntu 64bit 12.04

Stephen Cottham

16/07/2012

Now click on INSTALL at the bottom of the page, this will then create all the needed tables etc.. - it can take a little while but be patient.

### OpenMeetings - Installation Complete!

#### [Enter the Application](#)

If your Red5-Server runs on a different Port or on a different domain  
[alter the config values of the client](#)

#### Mailing list


<http://incubator.apache.org/openmeetings/mail-lists.html>

There are some companies that also offer commercial support for Apache OpenMeetings:

<http://incubator.apache.org/openmeetings/commercial-support.html>

Once that has completed you can now enter the application by clicking on the “**Enter the Application**” link

You should see the following logon screen:

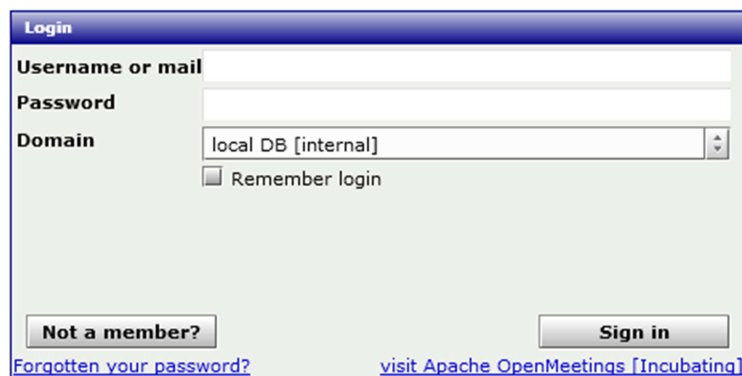

Username or mail

Password

Domain local DB [internal]

Remember login

Not a member? Sign in

[Forgotten your password?](#) [visit Apache OpenMeetings \[Incubating\]](#)

Enter these details to sign in.

Username: **omadmin**

Userpass: **ompassword**

**Step 11: Add relevant paths to the configuration**

Once logged in go to **Administration > Configuration**

You will see on the left hand pane a list of keys and values, the ones we are interested in are

SWFTools Path	<b><a href="#">/usr/local/bin</a></b>
ImageMagick Path	<b><a href="#">/usr/bin/</a></b>
FFMPEG Path	<b><a href="#">/usr/local/bin</a></b>
SoX Path	<b><a href="#">/usr/bin/</a></b>
JOD Path	<b><a href="#">/usr/lib/red5/webapps/openmeetings/jodconverter-core-3.0-beta-4/lib</a></b>

**Click on the left hand pane option and then enter the value as above, click on the save button to apply the changes; once you have done each key you should see the following:**



**Apache OpenMeetings [Incubating]**

Home | Recordings | Rooms | Administration

0 - 50 of 67

ID	Key	Value
1	crypt_ClassName	org.openmeetings.util.crypt.MD5Imple
2	screen_viewer	4
3	allow_frontend_register	1
4	default_group_id	1
5	default_domain_id	1
6	smtp_server	localhost
7	smtp_port	25
8	system_email_addr	noreply@localhost
9	email_username	
10	email_userpass	
11	mail.smtp.starttls.enabl	0
12	application.name	OpenMeetings
13	default_lang_id	1
14	swftools_zoom	72
15	swftools_jpegquality	85
16	swftools_path	/usr/local/bin
17	imagemagick_path	/usr/bin
18	sox_path	/usr/bin
19	ffmpeg_path	
20	office.path	
21	jod.path	/usr/lib/red5/webapps/openmeetings/j
22	rss_feed1	null
23	rss_feed2	null
24	sendEmailAtRegister	1
25	sendEmailWithVerificatic	1
26	default_export_font	TimesNewRoman
27	default.rpc.userid	1
28	red5sip.enable	no
29	red5sip.room_prefix	400
30	red5sip.exten_context	rooms
31	sip.enable	no
32	sip.realm	
33	sip.port	
34	sip.proxyname	
35	sip.tunnel	
36	sip.codebase	
37	sip.forcetunnel	true
38	sip.openxg.enable	no
39	openxg.wrapper.url	
40	openxg.client.id	
41	openxg.client.secret	
42	openxg.client.domain	

**Configuration**

Key

Value

Last update

Updated by

Comment

**JOD will find open office in this case so we do not need to set the path.**

## Step 12: Securing OpenMeetings using encryption (Optional)

### 12.1 - Generating CSR:

We can do this in a few ways, the first way I will show here is simply by generating a CSR and inserting these into OpenMeetings.

Create a new keystore and key, use the same password for both: (Taken from OM Website <http://incubator.apache.org/openmeetings/RTMPSAndHTTPS.html>)

```
keytool -keysize 2048 -genkey -alias red5 -keyalg RSA -keystore red5/conf/keystore
Enter keystore password:
Re-enter new password:
What is your first and last name?
[Unknown]: <your hostname, e.g demo.openmeetings.de>
What is the name of your organizational unit?
[Unknown]: Dev
What is the name of your organization?
[Unknown]: OpenMeetings
What is the name of your City or Locality?
[Unknown]: Henderson
What is the name of your State or Province?
[Unknown]: Nevada
What is the two-letter country code for this unit?
[Unknown]: US
Is CN=demo.openmeetings.de, OU=Dev, O=OpenMeetings, L=Henderson, ST=Nevada, C=US
correct?
[no]: yes
Enter key password for <red5>
```

Generate a CSR:

```
keytool -certreq -keyalg RSA -alias red5 -file red5.csr -keystore red5/conf/keystore
```

Submit CSR to your CA of choice and receive a signed certificate

Import your chosen CA's root certificate into the keystore (may need to download it from their site - make sure to get the root CA and not the intermediate one)

```
keytool -import -alias root -keystore red5/conf/keystore -trustcacerts -file root.crt
```

(note: you may receive a warning that the certificate already exists in the system wide keystore - import anyway)

Import the intermediate certificate(s) you normally receive with the certificate:

```
keytool -import -alias intermed -keystore red5/conf/ keystore -trustcacerts -file intermediate.crt
```

Import the certificate you received:

```
keytool -import -alias red5 -keystore red5/conf/keystore -trustcacerts -file
demo.openmeetings.de.crt
```

## 12.2 – Using Existing certs such as wild card certificates instead of generating a new CSR.

First let's go back to our work area:

```
cd /usr/adm/  
mkdir certs  
cd certs/
```

Using WinSCP or equivalent copy your wild card key and cert files: yourdomain.key.pem and yourdomain.cert.pem - **(These should be in PEM format)**

Now issue the following to convert the files to DER format

```
openssl pkcs8 -topk8 -nocrypt -in apache.key.pem -inform PEM -out key.der -outform DER  
openssl x509 -in apache.cert.pem -inform PEM -out cert.der -outform DER
```

Now we need a couple of files to help us import the DER files into the keystore, so issue the following:

```
wget http://www.agentbob.info/agentbob/80/version/default/part/AttachmentData/data/ImportKey.java  
wget http://www.agentbob.info/agentbob/81/version/default/part/AttachmentData/data/ImportKey.class
```

Then use these commands to import:

```
java ImportKey key.der cert.der
```

Finally move the keystore to the correct location

```
mv /root/keystore.ImportKey /usr/lib/red5/conf/keystore
```

**N.B = Alias:importkey Password:importkey (When using the java import key files, you can change the password afterwards)**

## OpenMeetings 2.X Installation on Ubuntu 64bit 12.04

Stephen Cottham

16/07/2012

Now that we have either a new Cert of the wild card cert inside our Keystore we need to make some changes to OM 2.x to use these certificates and thus encrypt communications using HTTPS and RTMPS.

To use RTMPS do the following:

First make some changes to the red5-core.xml file by issuing the following:

```
cd /usr/lib/red5/conf
vi red5-core.xml
```

now uncomment `<!-- RTMPS -->` section by removing the `<!--` and the `-->` leaving this:

```
<bean id="rtmpsMinaIoHandler"
  class="org.red5.server.net.rtmpps.RTMPSMinaIoHandler">
  <property name="handler" ref="rtmpHandler" />
  <property name="codecFactory" ref="rtmpCodecFactory" />
  <property name="rtmpConnManager" ref="rtmpMinaConnManager" />
  <property name="keyStorePassword" value="{rtmps.keystorepass}" />
  <property name="keystoreFile" value="conf/keystore" />
</bean>

<bean id="rtmpsTransport" class="org.red5.server.net.rtmp.RTMPMinaTransport" init-
method="start" destroy-method="stop">
  <property name="ioHandler" ref="rtmpsMinaIoHandler" />
  <property name="connectors">
    <list>
      <bean class="java.net.InetSocketAddress">
        <constructor-arg index="0" type="java.lang.String" value="{rtmps.host}" />
        <constructor-arg index="1" type="int" value="{rtmps.port}" />
      </bean>
    </list>
  </property>
  <property name="ioThreads" value="{rtmp.io_threads}" />
  <property name="jmxPollInterval" value="1000" />
  <property name="tcpNoDelay" value="{rtmp.tcp_nodelay}" />
</bean>
```

Save this file and then do the following:

```
cd /usr/lib/red5/conf
vi red5.properties
```

```
set rtmpps.port=5443
```

```
rtmps.keystorepass=password (password = password you set on your new keystore)
```

Now edit config.xml by doing the following:

```
cd /usr/lib/red5/webapps/openmeetings/
vi config.xml
```

Stephen Cottham

16/07/2012

Set these following values:

```
<rtmpsslport>5443</rtmpsslport>  
<useSSL>yes</useSSL>  
<proxyType>best</proxyType>
```

**To use HTTPS do the following:**

First make a backup of the original jee-container file by doing the following:

```
cd /usr/lib/red5/conf  
mv jee-container.xml jee-container.xml.orig
```

Then rename the SSL jee template

```
mv jee-container-ssl.xml jee-container.xml
```

Now edit the config.xml

```
cd /usr/lib/red5/webapps/openmeetings/  
vi config.xml
```

set

```
<protocol>https</protocol>  
<red5httpport>443</red5httpport>
```

Lastly edit red5.properties by doing the following:

```
cd /usr/lib/red5/conf  
vi red5.properties
```

set

```
https.port=443  
http.port=443
```

Now restart OM using the following:

```
/etc/init.d/red5 restart
```

We can now connect using the following link:

```
https://yourdomain/openmeetings
```

### Step 13: Installing Reverse Proxy using Apache Web Server (Optional)

Another way to secure the OpenMeetings service is to use Apache as a reverse proxy, to do this we need to do the following:

First install Apache2 and enabling relevant modules by running the following commands:

```
apt-get install apache2
a2enmod proxy
a2enmod proxy_http
a2enmod ssl
a2enmod headers
a2enmod rewrite
a2enmod cache
/etc/init.d/apache2 restart
```

We can now redirect port 80 (less secure) or port 443 (secure) to port 5080, to do this we need to create a virtual host, to do this do the following:

```
cd /etc/apache2/sites-enabled/
```

Now for SSL redirect (**using a Cert on Apache instead of keystore**) do the following

```
vi om.yourdomain.com-ssl
```

and add the following

```
<IfModule mod_ssl.c>
#NameVirtualHost *:443
ProxyRequests Off
<VirtualHost *:80>
  ServerAdmin hostmaster@domain.com
  ServerName om.yourdomain.com

ProxyPreserveHost On
RewriteEngine on
```